

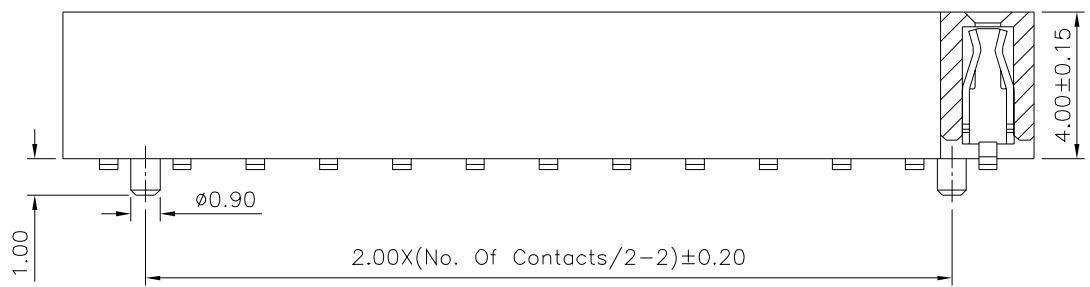


Recommended P.C.B. Layout

△ SPECIFICATION
 Current Rating: 1.5 Amps/Contact Max.
 Withstand Voltage: 450V AC/Minute
 Contact Resistance: 20 Milliohms Max./Contact
 Insulation Resistance: 1000 Megaohms Min. At 100V
 Operation Temperature: -55°C ~ +105°C
 Contact: Phosphor Bronze, Gold Flash Over Nickel
 Insulator: PA6T+30%G.F.(UL94V-0), Black
 RoHS Compliant

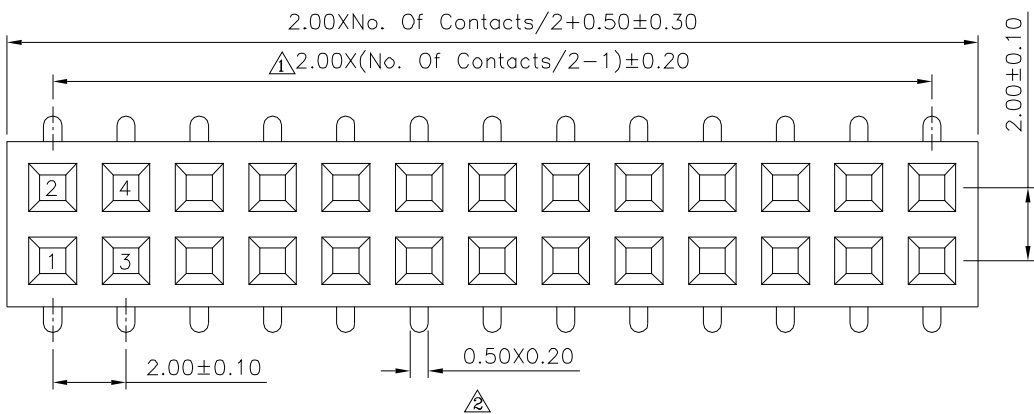

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.25 .X ±0.15 .XX ±0.10 .XXX ±0.05 ANG. ±5°
00424		MEI		
		CHECKED BY HZF		
		DRAWING BY CYP		
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	12/06/2017
△ A1		Modify Data	HZF	10/29/2015
△ A0		NEW RELEASE	HZF	08/17/2013