

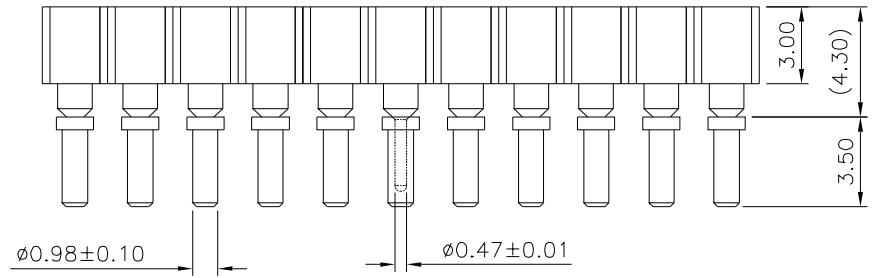


Recommended P.C.B. Layout
Tolerance ±0.05

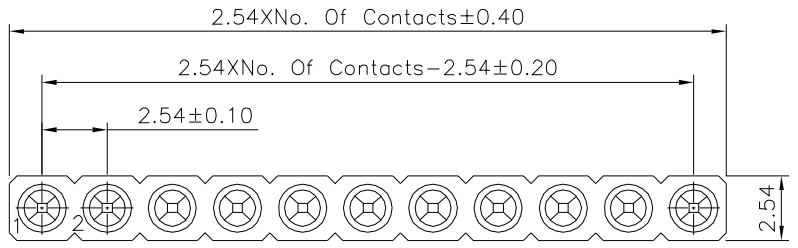

SPECIFICATION

Current Rating: 3A/Contact Max.
 Insulation Resistance: 1000 Megaohms At 100V
 Contact Resistance: 4 Milliohms Max.
 Operation Temperature: -40°C ~ +105°C
 Pin (Outer Sleeve): Brass, Tin Plated Over Nickel
 Clip (Contact 4 Finger): Beryllium Copper
 Gold Flash Over Nickel
 Insulator: PPS, Black
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.38 .XX ±0.25 .XXX ±0.15 ANG. ±5°
23098		Jason Wu		
		CHECKED BY		
		Leo Han		
		DRAWING BY		
		Michelle Lee		
SCALE	NONE	REV.	A0	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	11/25/2025