
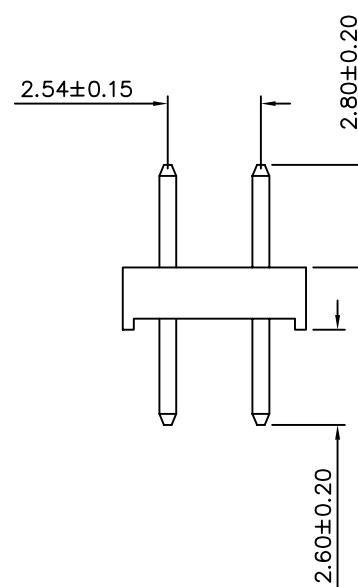
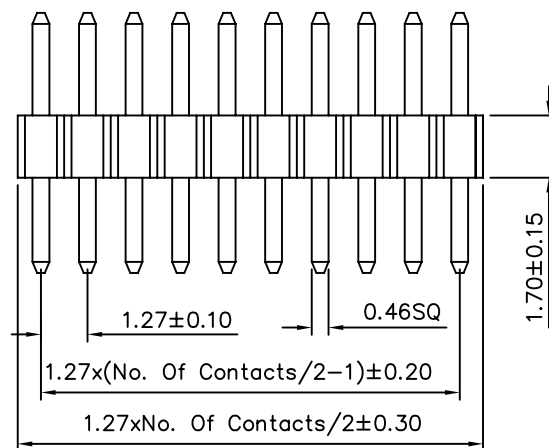
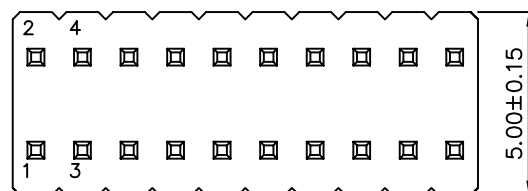


SPECIFICATIONS

Current Rating: 1 Amp
 Insulator Resistance: 1000 Megohms Min.
 Contact Resistance: 20 Milliohms Max.
 Withstanding Voltage: AC 500V/Minute
 Operating Temperature: -40°C To +105°C
 Contact: Brass, Gold Flash Over All
 Insulator: Black Polyester PA6T+30%G.F., UL 94V-0

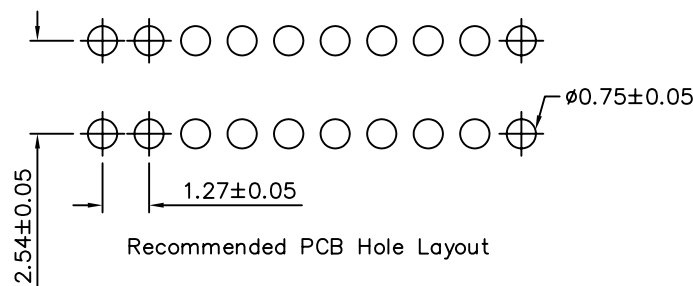

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00040

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE


.X ±0.38

.XX ±0.25

.XXX ±0.12

UNIT

mm



NO. REV.

A0 NEW RELEASE

REVISIONS

BECKY

10/28/2005

CHK

DATE