
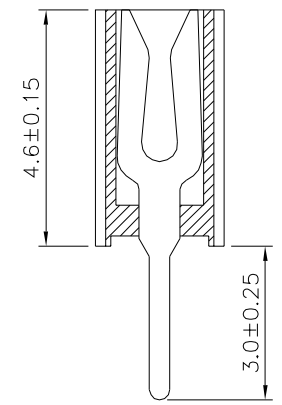
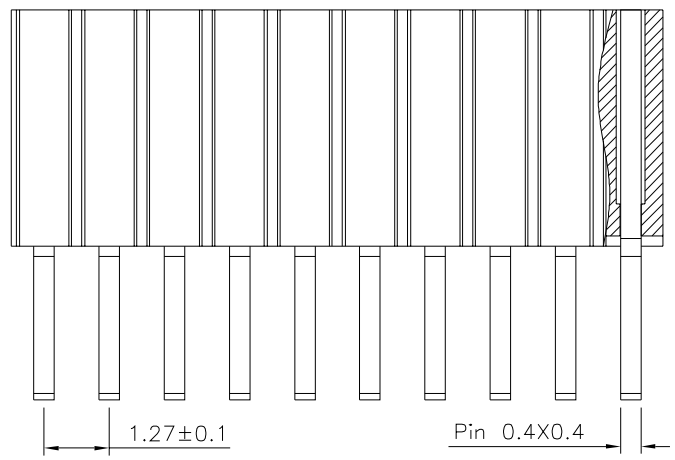


Recommended P.C.B. Layout (Top View)  
(PCB Board Tolerance ±0.05)

**SPECIFICATION**  
 Current Rating: 1 Amp  
 Withstand Voltage: 500V AC  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operating Temperature: -40°C ~ +105°C  
 Insulator: PA6T (UL94V-0), Black  
 Contact: Brass, Gold Flash Over Nickel  
 RoHS Compliant

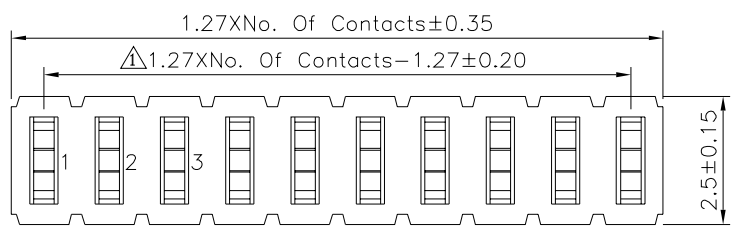

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
00065		MEI		
		CHECKED BY HZF		
SCALE		DRAWING BY		X: ±0.25 X*: ±2°
NONE		HAO		.X ±0.20 .X* ±1.5°
REV.		A1		.XX ±0.15 .XX* ±1°
				.XXX ±0.10 .XXX* ±0.5°
				UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△A1	A1	Modify Data	HZF	03/26/2016
△A0	A0	NEW RELEASE	HZF	02/01/2015