File No.	697GE31806	SHEET	1/1

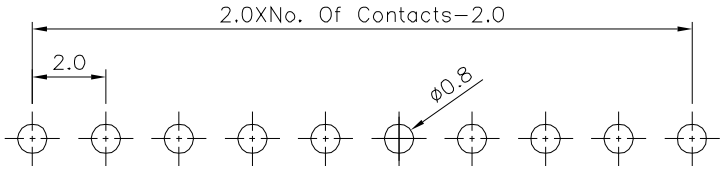

Recommended P.C.Board Layout(Top View)
(PCB Board Tolerance±0.05)

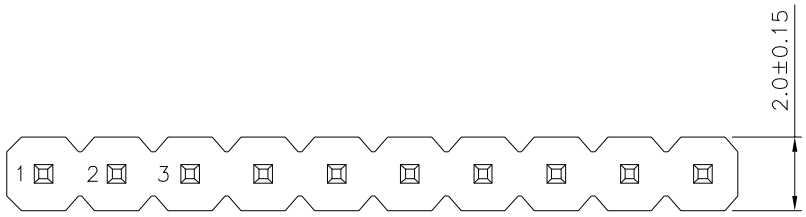

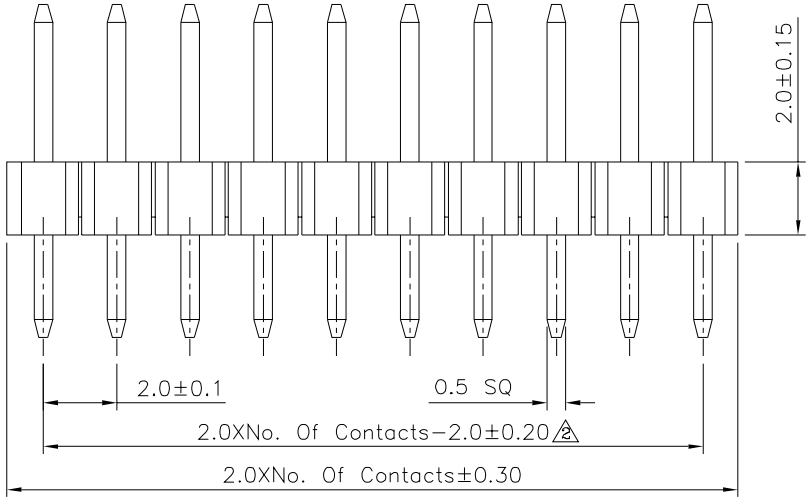



SPECIFICATION
Current Rating:1.5 Amps
1 Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
1 Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Insulator:PA6T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE 1
00182	MEI	X. ±0.25 X.° ±2°
	CHECKED BY HZF	.X ±0.20 .X° ±1.5°
	DRAWING BY CYP	.XX ±0.15 .XX° ±1°
SCALE NONE	REV. A2	.XXX ±0.10 .XXX° ±0.5°
		UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
2	A2	Modify Data	HZF	05/31/2016
1	A1	Modify Data	HZF	01/07/2014
0	A0	NEW RELEASE	HZF	01/21/2011