

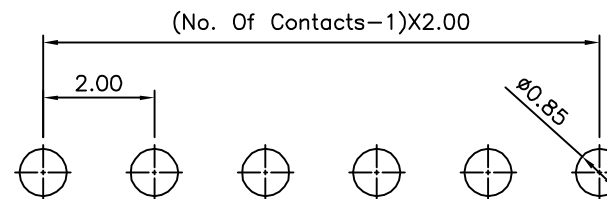
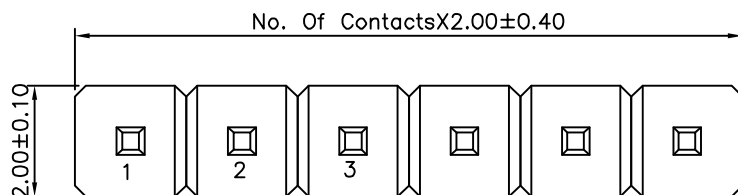


△ SPECIFICATION

Current:1A
 Operating Temperature:−55°C~+105°C
 Contact Resistance:20 Milliohms Max
 Insulation Resistance:5000 Megaohm Min
 Dielectric Strength:1000V AC Min
 Housing:PA6T(UL94V−0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:02~40 Contacts
 RoHS Compliant

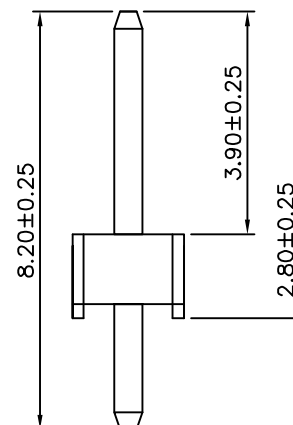

Recommended P.C.B Layout

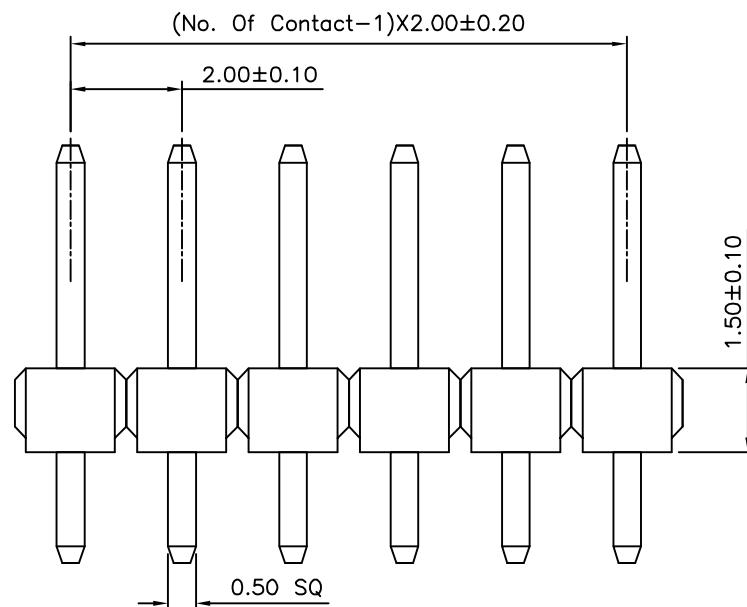

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00193

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ A1

Modify Data

HZF

02/12/2014

△ A0

NEW RELEASE

HZF

02/05/2008