


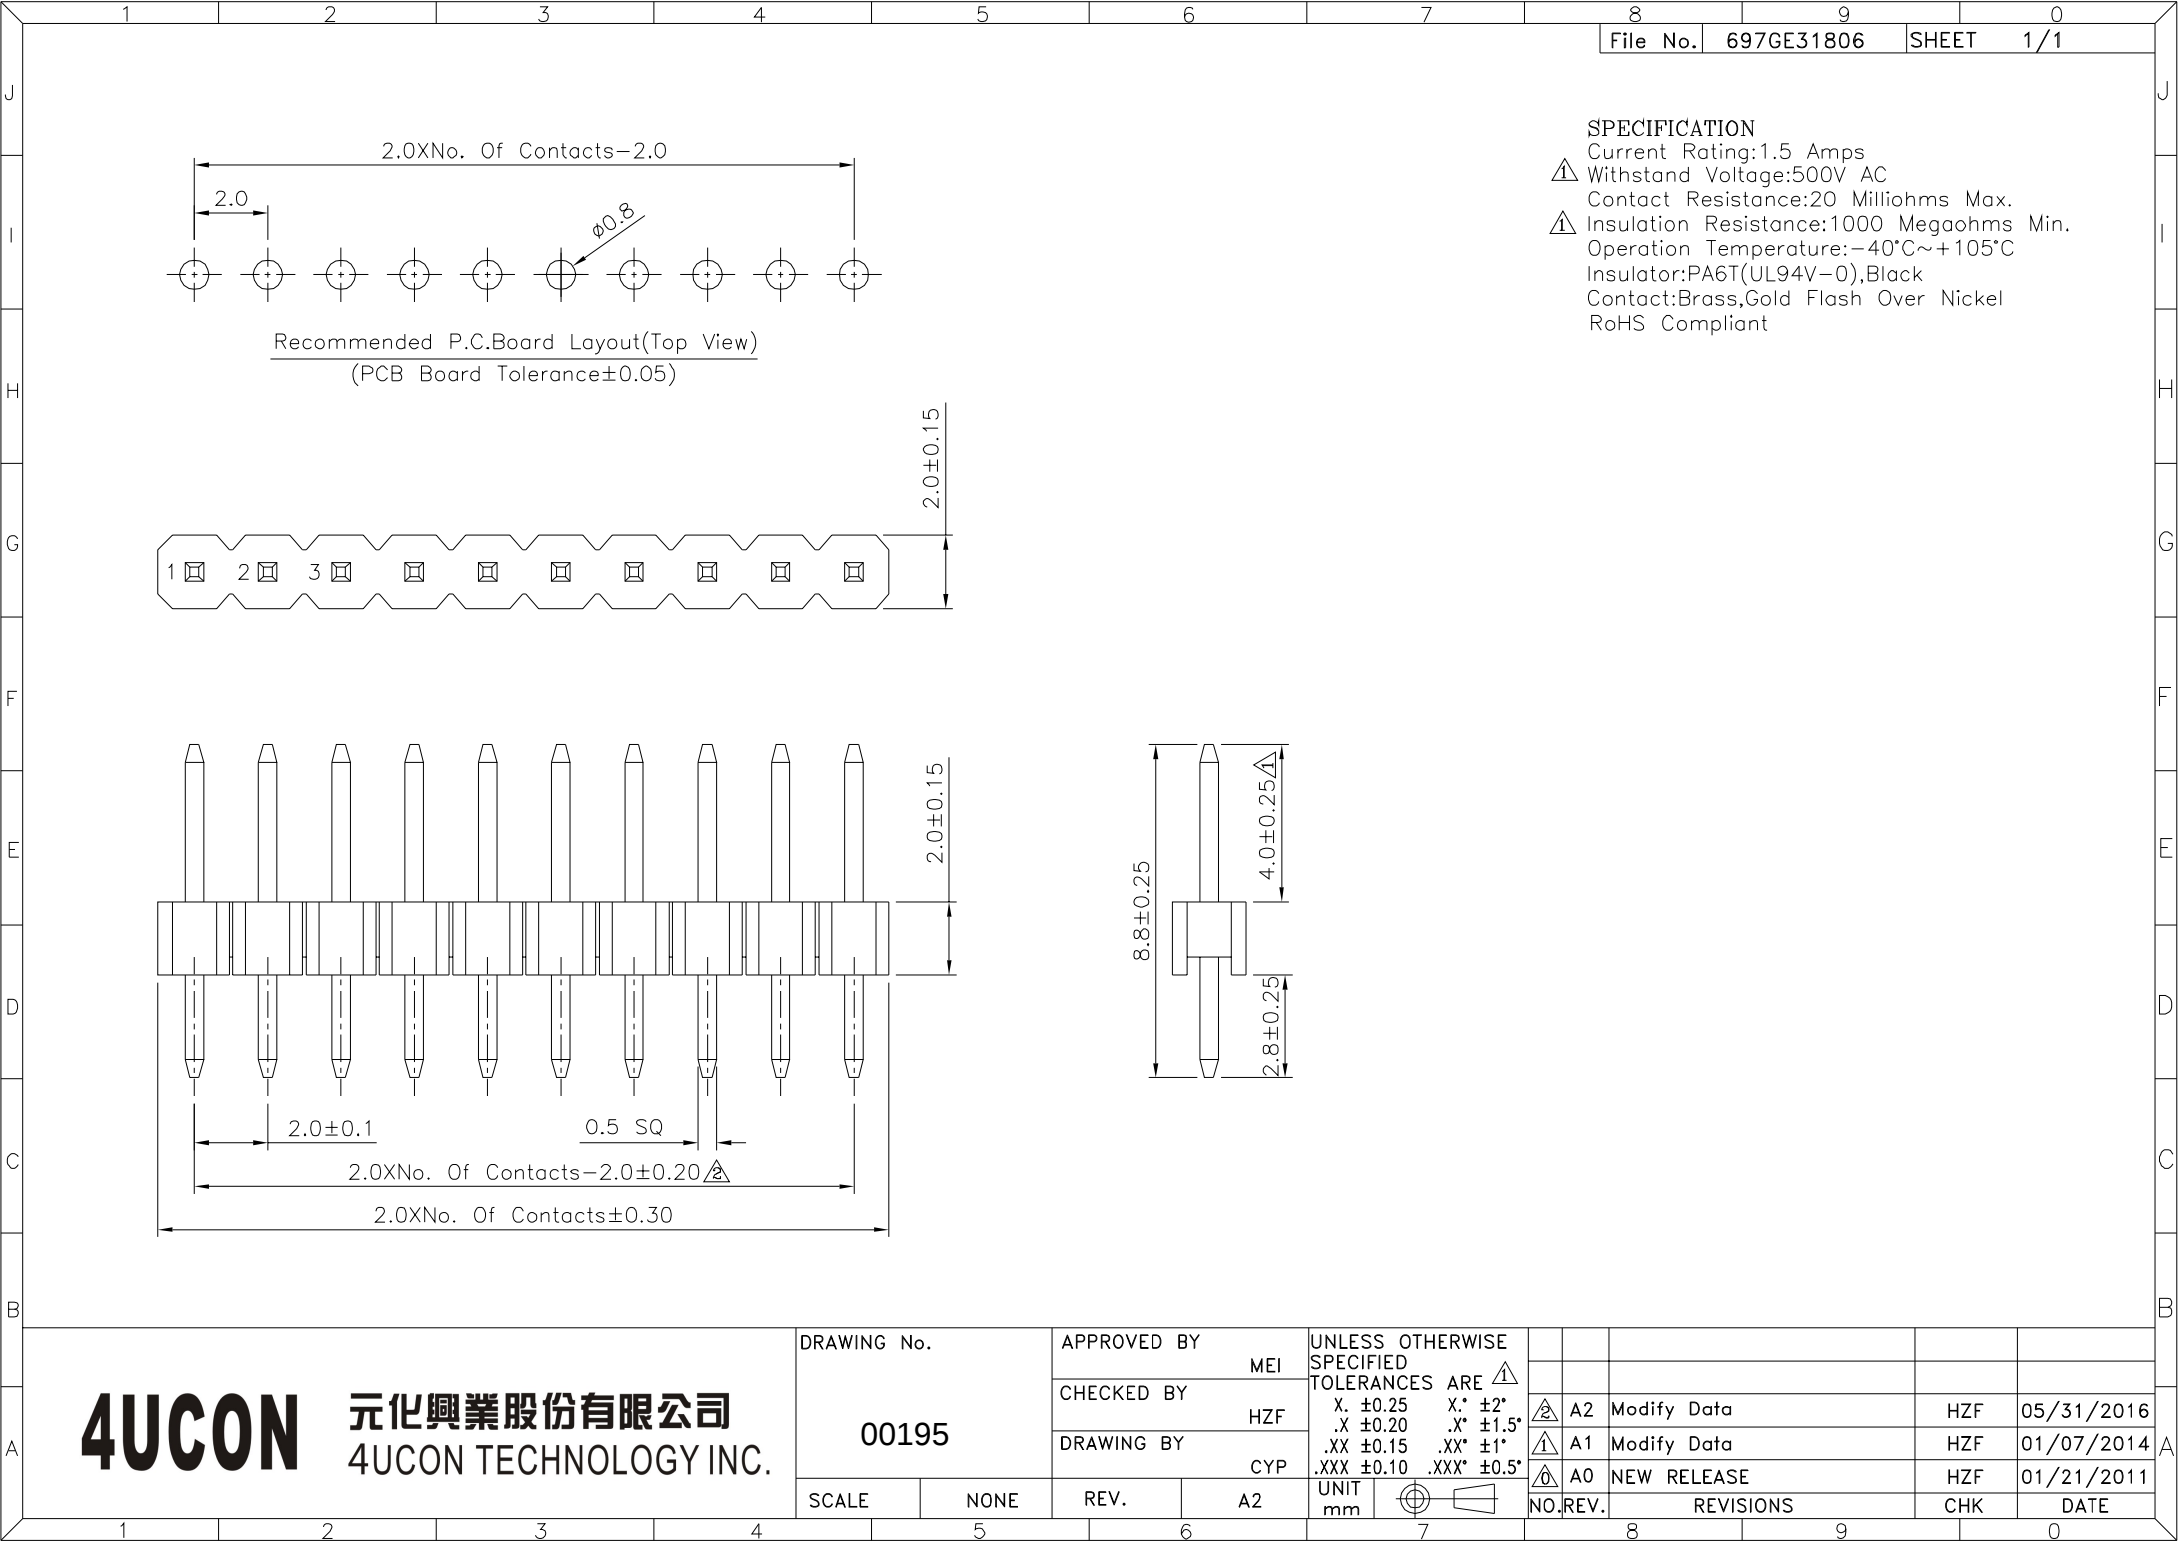

SPECIFICATION

- Current Rating:1.5 Amps
- Withstand Voltage:500V AC
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Insulator:PA6T(UL94V-0),Black
- Contact:Brass,Gold Flash Over Nickel
- RoHS Compliant

4UCON

元化興業股份有限公司  
4UCON TECHNOLOGY INC.

|             |      |             |    |                                                    |                                                                                       |               |               |             |     |             |
|-------------|------|-------------|----|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------|---------------|-------------|-----|-------------|
| DRAWING No. |      | APPROVED BY |    | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE $\Delta$ |                                                                                       |               |               |             |     |             |
|             |      | MEI         |    |                                                    |                                                                                       |               |               |             |     |             |
|             |      | CHECKED BY  |    |                                                    |                                                                                       |               |               |             |     |             |
|             |      | HZF         |    |                                                    |                                                                                       | X. $\pm 0.25$ | X.* $\pm 2^*$ | $\Delta$ 2  | A2  | Modify Data |
| 00195       |      | DRAWING BY  |    |                                                    |                                                                                       |               |               |             |     |             |
|             |      | CYP         |    | .X $\pm 0.20$                                      | .X.* $\pm 1.5^*$                                                                      | $\Delta$ 1    | A1            | Modify Data | HZF | 01/07/2014  |
|             |      |             |    | .XX $\pm 0.15$                                     | .XX.* $\pm 1^*$                                                                       | $\Delta$ 0    | A0            | NEW RELEASE | HZF | 01/21/2011  |
| SCALE       | NONE | REV.        | A2 | UNIT<br>mm                                         |  | NO.           | REV.          | REVISIONS   | CHK | DATE        |