



△ SPECIFICATION


Current:1A
 Operating Temperature: -55°C~+105°C
 Contact Resistance:20 Milliohms Max
 Insulation Resistance:5000 Megaohm Min
 Dielectric Strength:1000V AC Min
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:02~40 Contacts
 RoHS Compliant

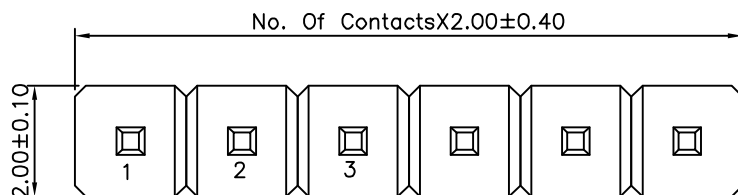


△

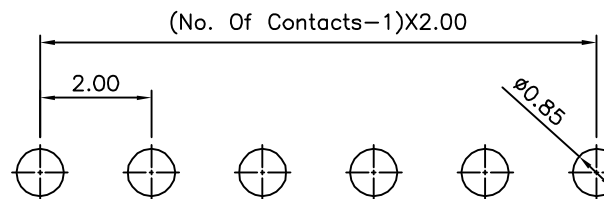

Recommended P.C.B Layout

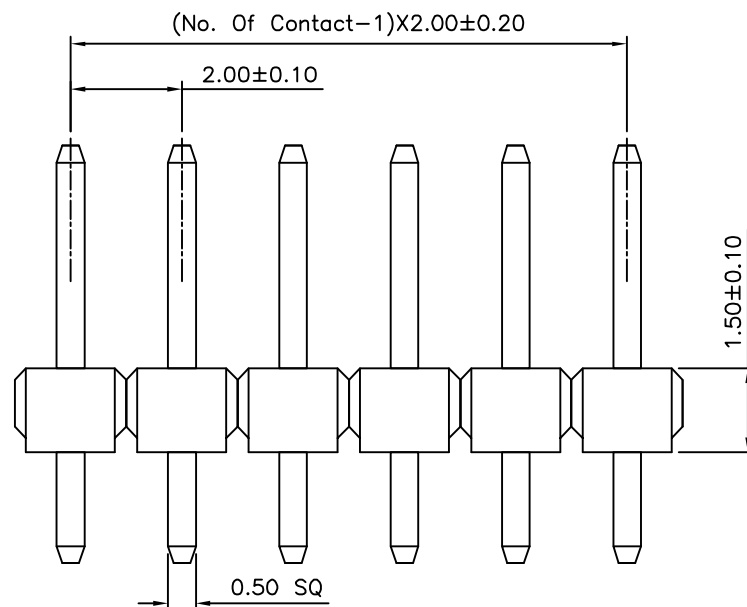

△

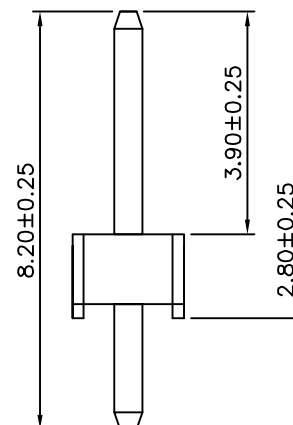

△

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00198

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	02/12/2014
△ A0		NEW RELEASE	HZF	02/05/2008