
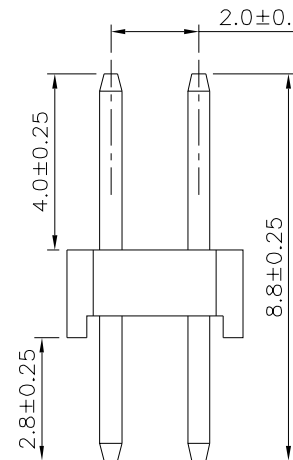
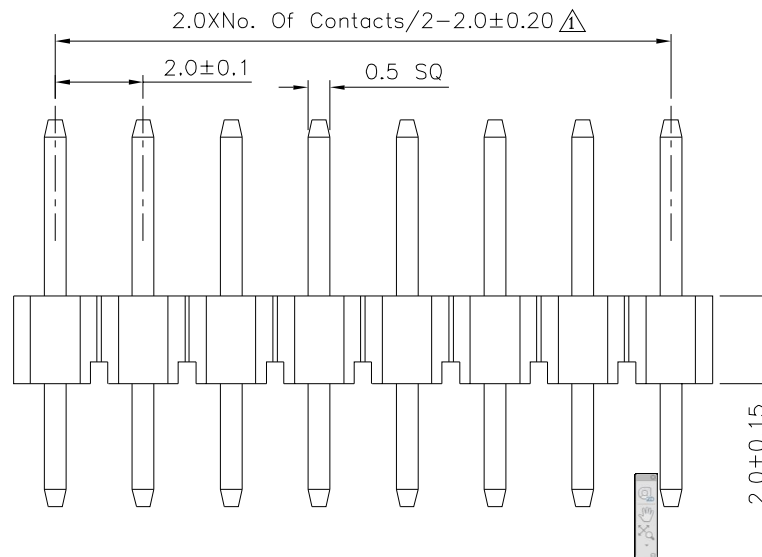


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

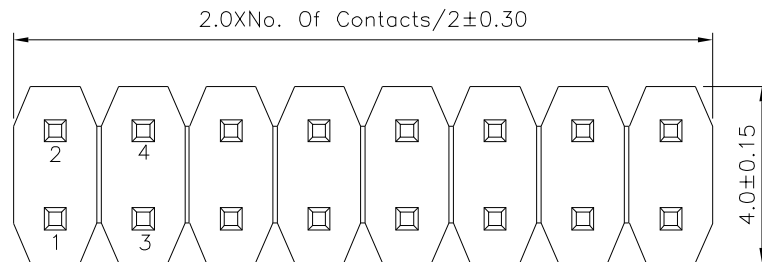

SPECIFICATION

Current Rating:1.5 Amps
Withstanding Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

00212

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.25 X.* $\pm 2^{\circ}$
.X ± 0.20 .X* $\pm 1.5^{\circ}$
.XX ± 0.15 .XX* $\pm 1^{\circ}$
.XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
A1	Modify Data	HZF	05/31/2016	
A0	NEW RELEASE	HZF	07/06/2013	