


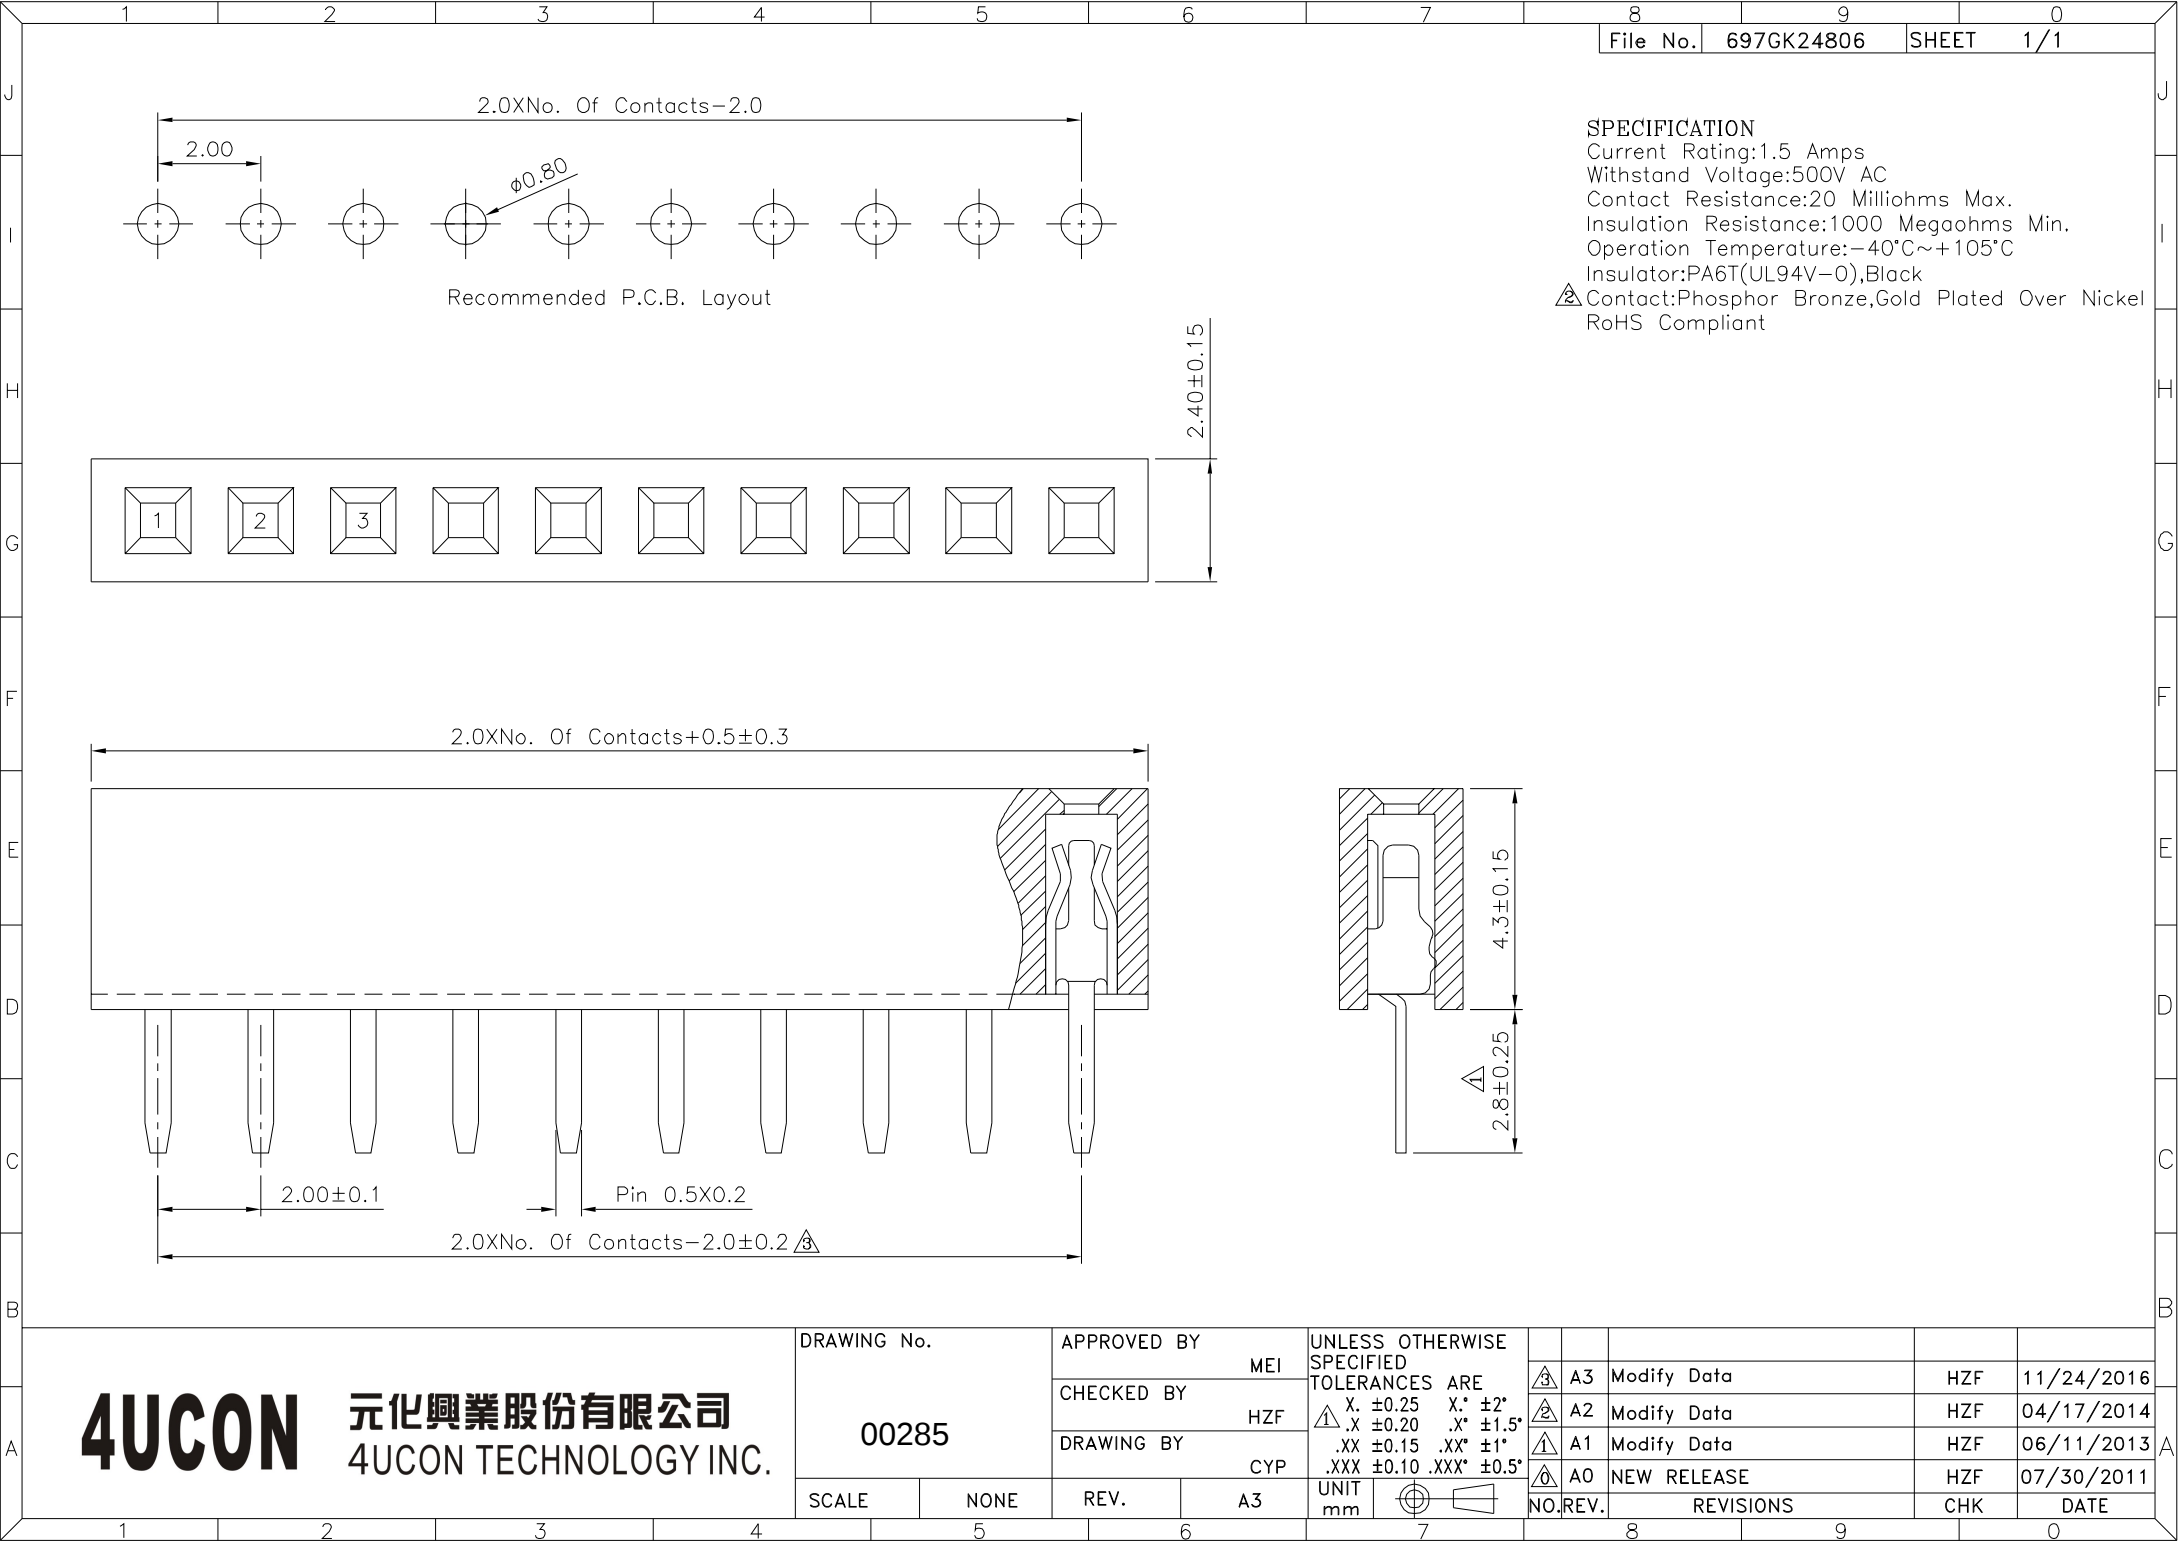

SPECIFICATION
Current Rating:1.5 Amps
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
⚠ Contact:Phosphor Bronze,Gold Plated Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE						
		MEI				 A3	Modify Data	HZF	11/24/2016	
		CHECKED BY				 A2	Modify Data	HZF	04/17/2014	
		HZF				 A1	Modify Data	HZF	06/11/2013	
		DRAWING BY				 A0	NEW RELEASE	HZF	07/30/2011	
CYP										
00285										
SCALE	NONE	REV.	A3	UNIT		NO. REV.	REVISIONS		CHK	DATE
				mm						