


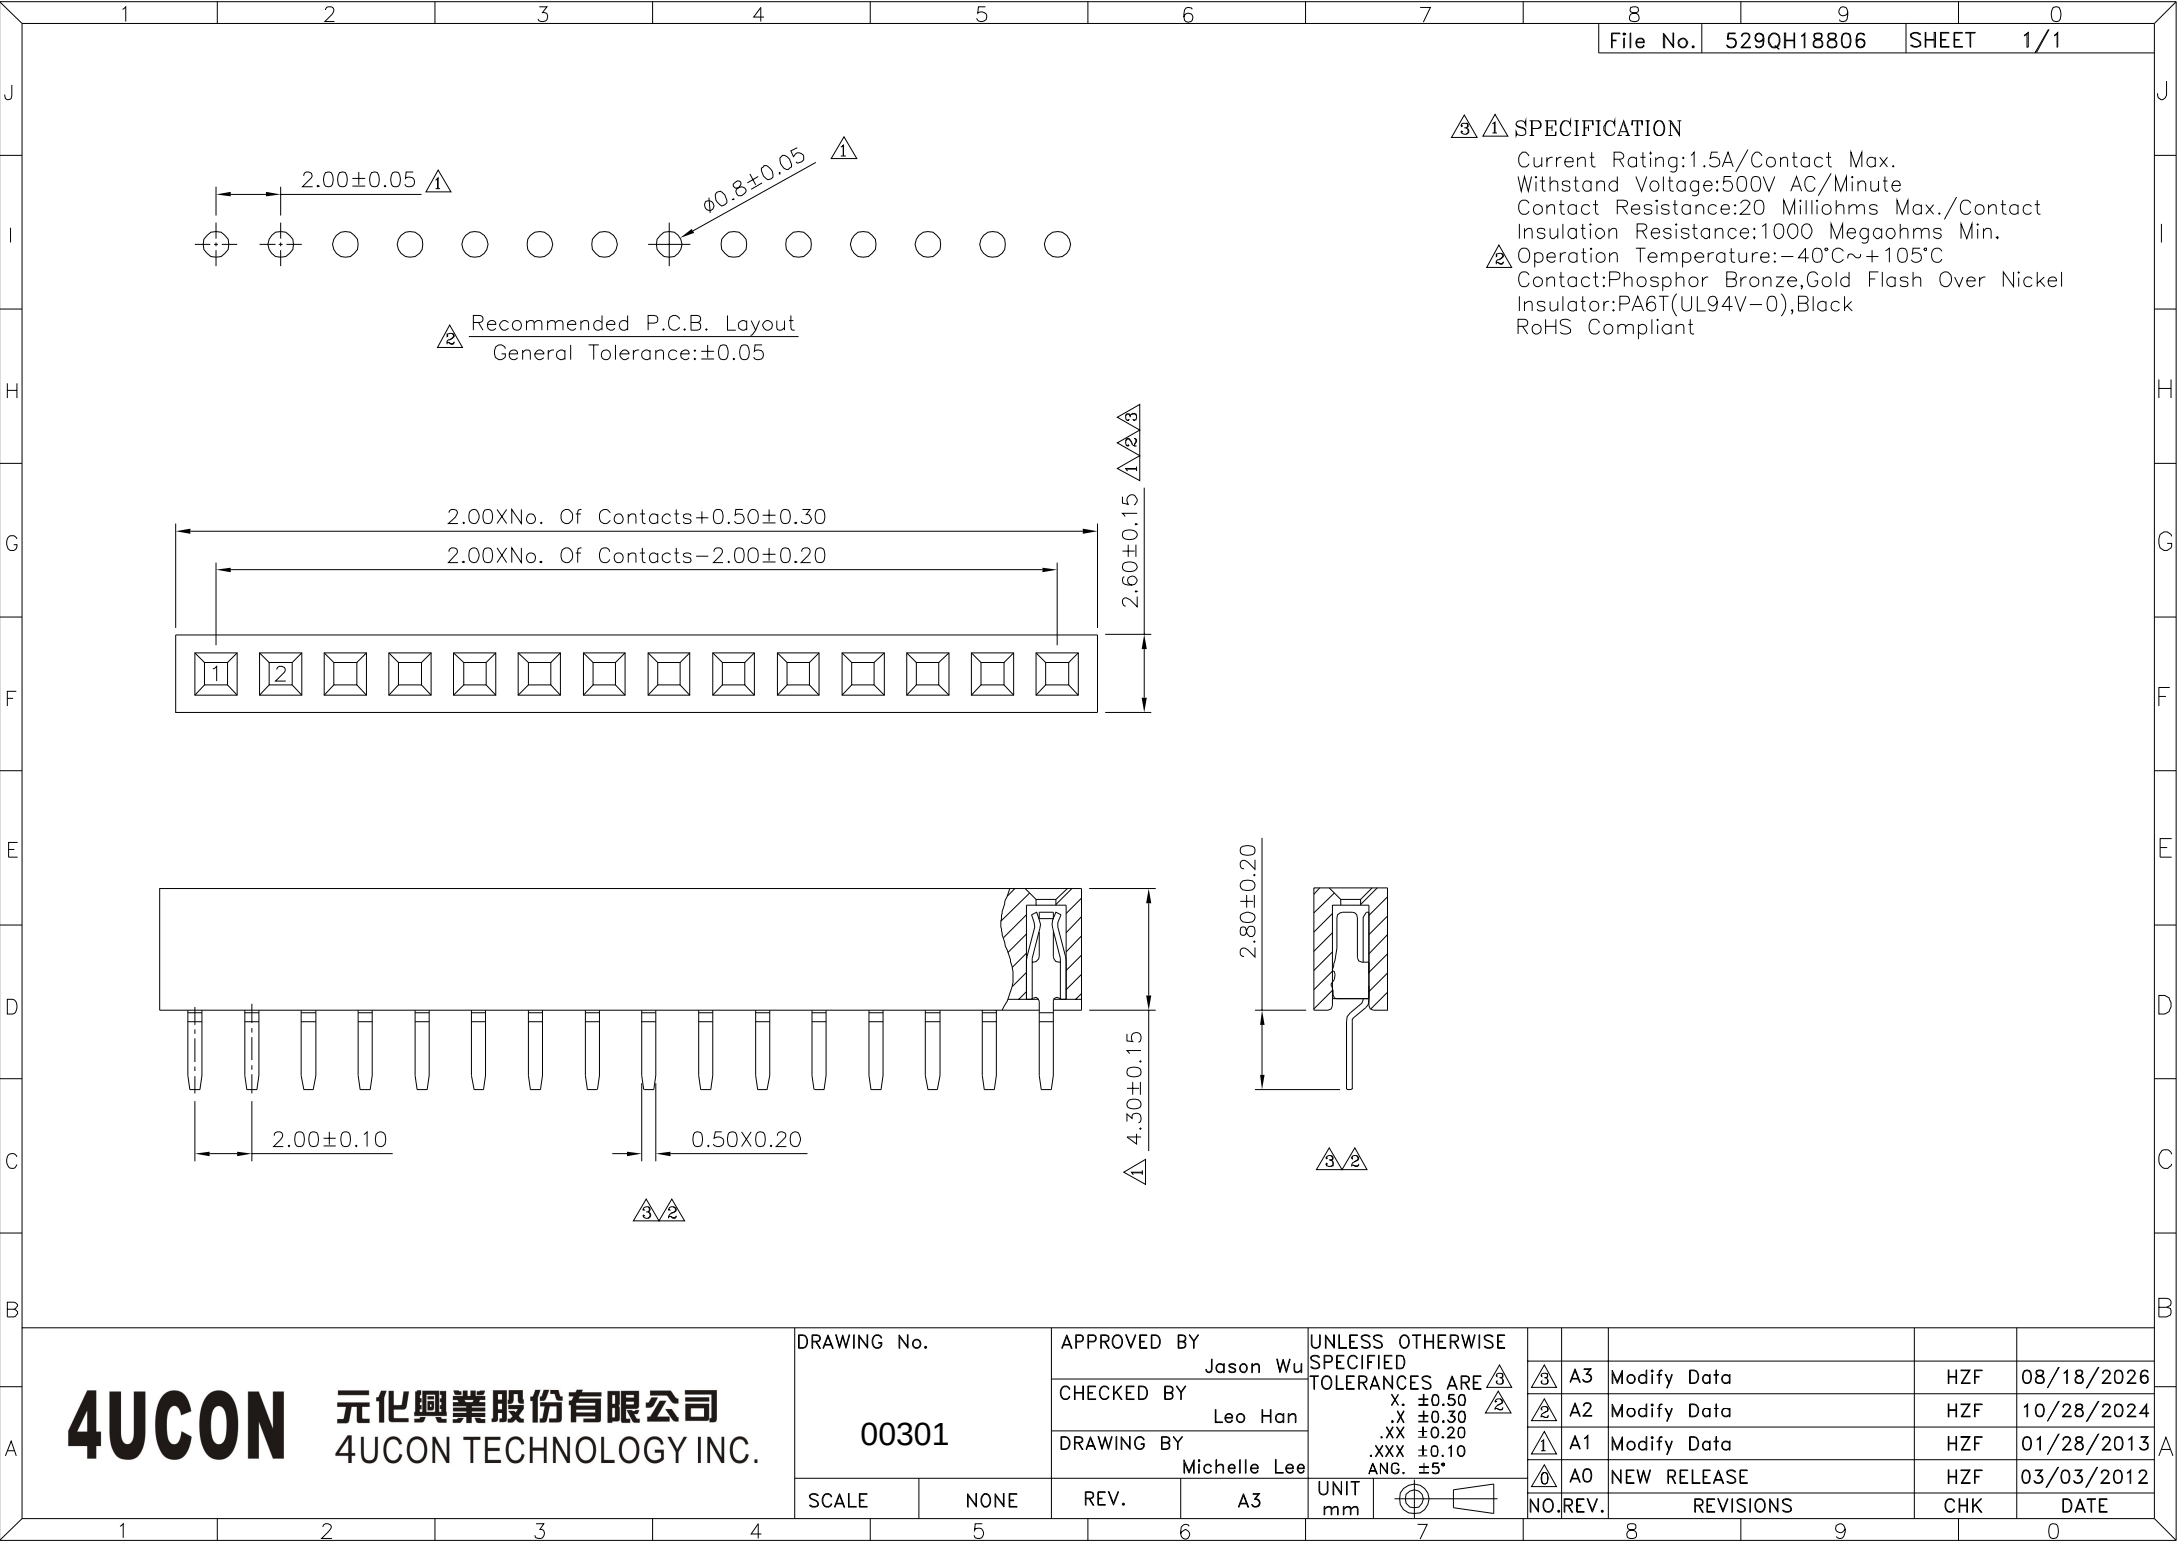

△△ SPECIFICATION

Current Rating:1.5A/Contact Max.
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min.
△ Operation Temperature:−40°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T(UL94V−0),Black
RoHS Compliant

4U CON

元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.
00301

APPROVED BY
Jason Wu
CHECKED BY
Leo Han
DRAWING BY
Michelle Lee

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG. $\pm 5^\circ$



NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	08/18/2026
△	A2	Modify Data	HZF	10/28/2024
△	A1	Modify Data	HZF	01/28/2013
△	A0	NEW RELEASE	HZF	03/03/2012