

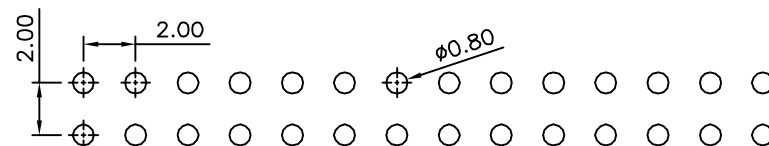


SPECIFICATION


Current Rating:2.0 Amp
 Withstand Voltage:500V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Phosphor Bronze
 Gold Flash Over All,Over Nickel
 Insulator:PA9T+30%G.F.(UL94V-0),Black
 RoHS Compliant

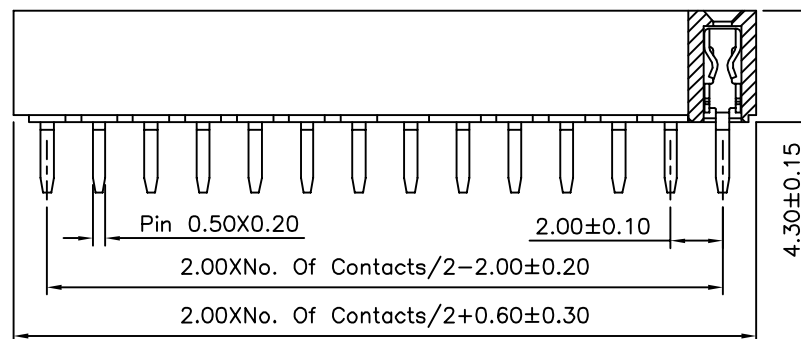

Recommended P.C.B Layout(Top Side)
 (PCB Board Tolerance±0.05)

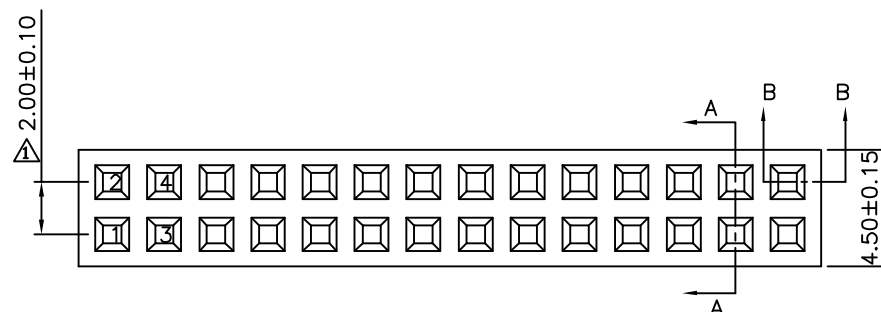

Section B-B



Section A-A

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00321

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

C3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△	C3	Modify Spec.	HZF	09/28/2012
△	C2	Modify Data	HZF	03/11/2010
△	C1	Modify Data	HZF	10/27/2009
△	C0	NEW RELEASE	HZF	12/02/2008