


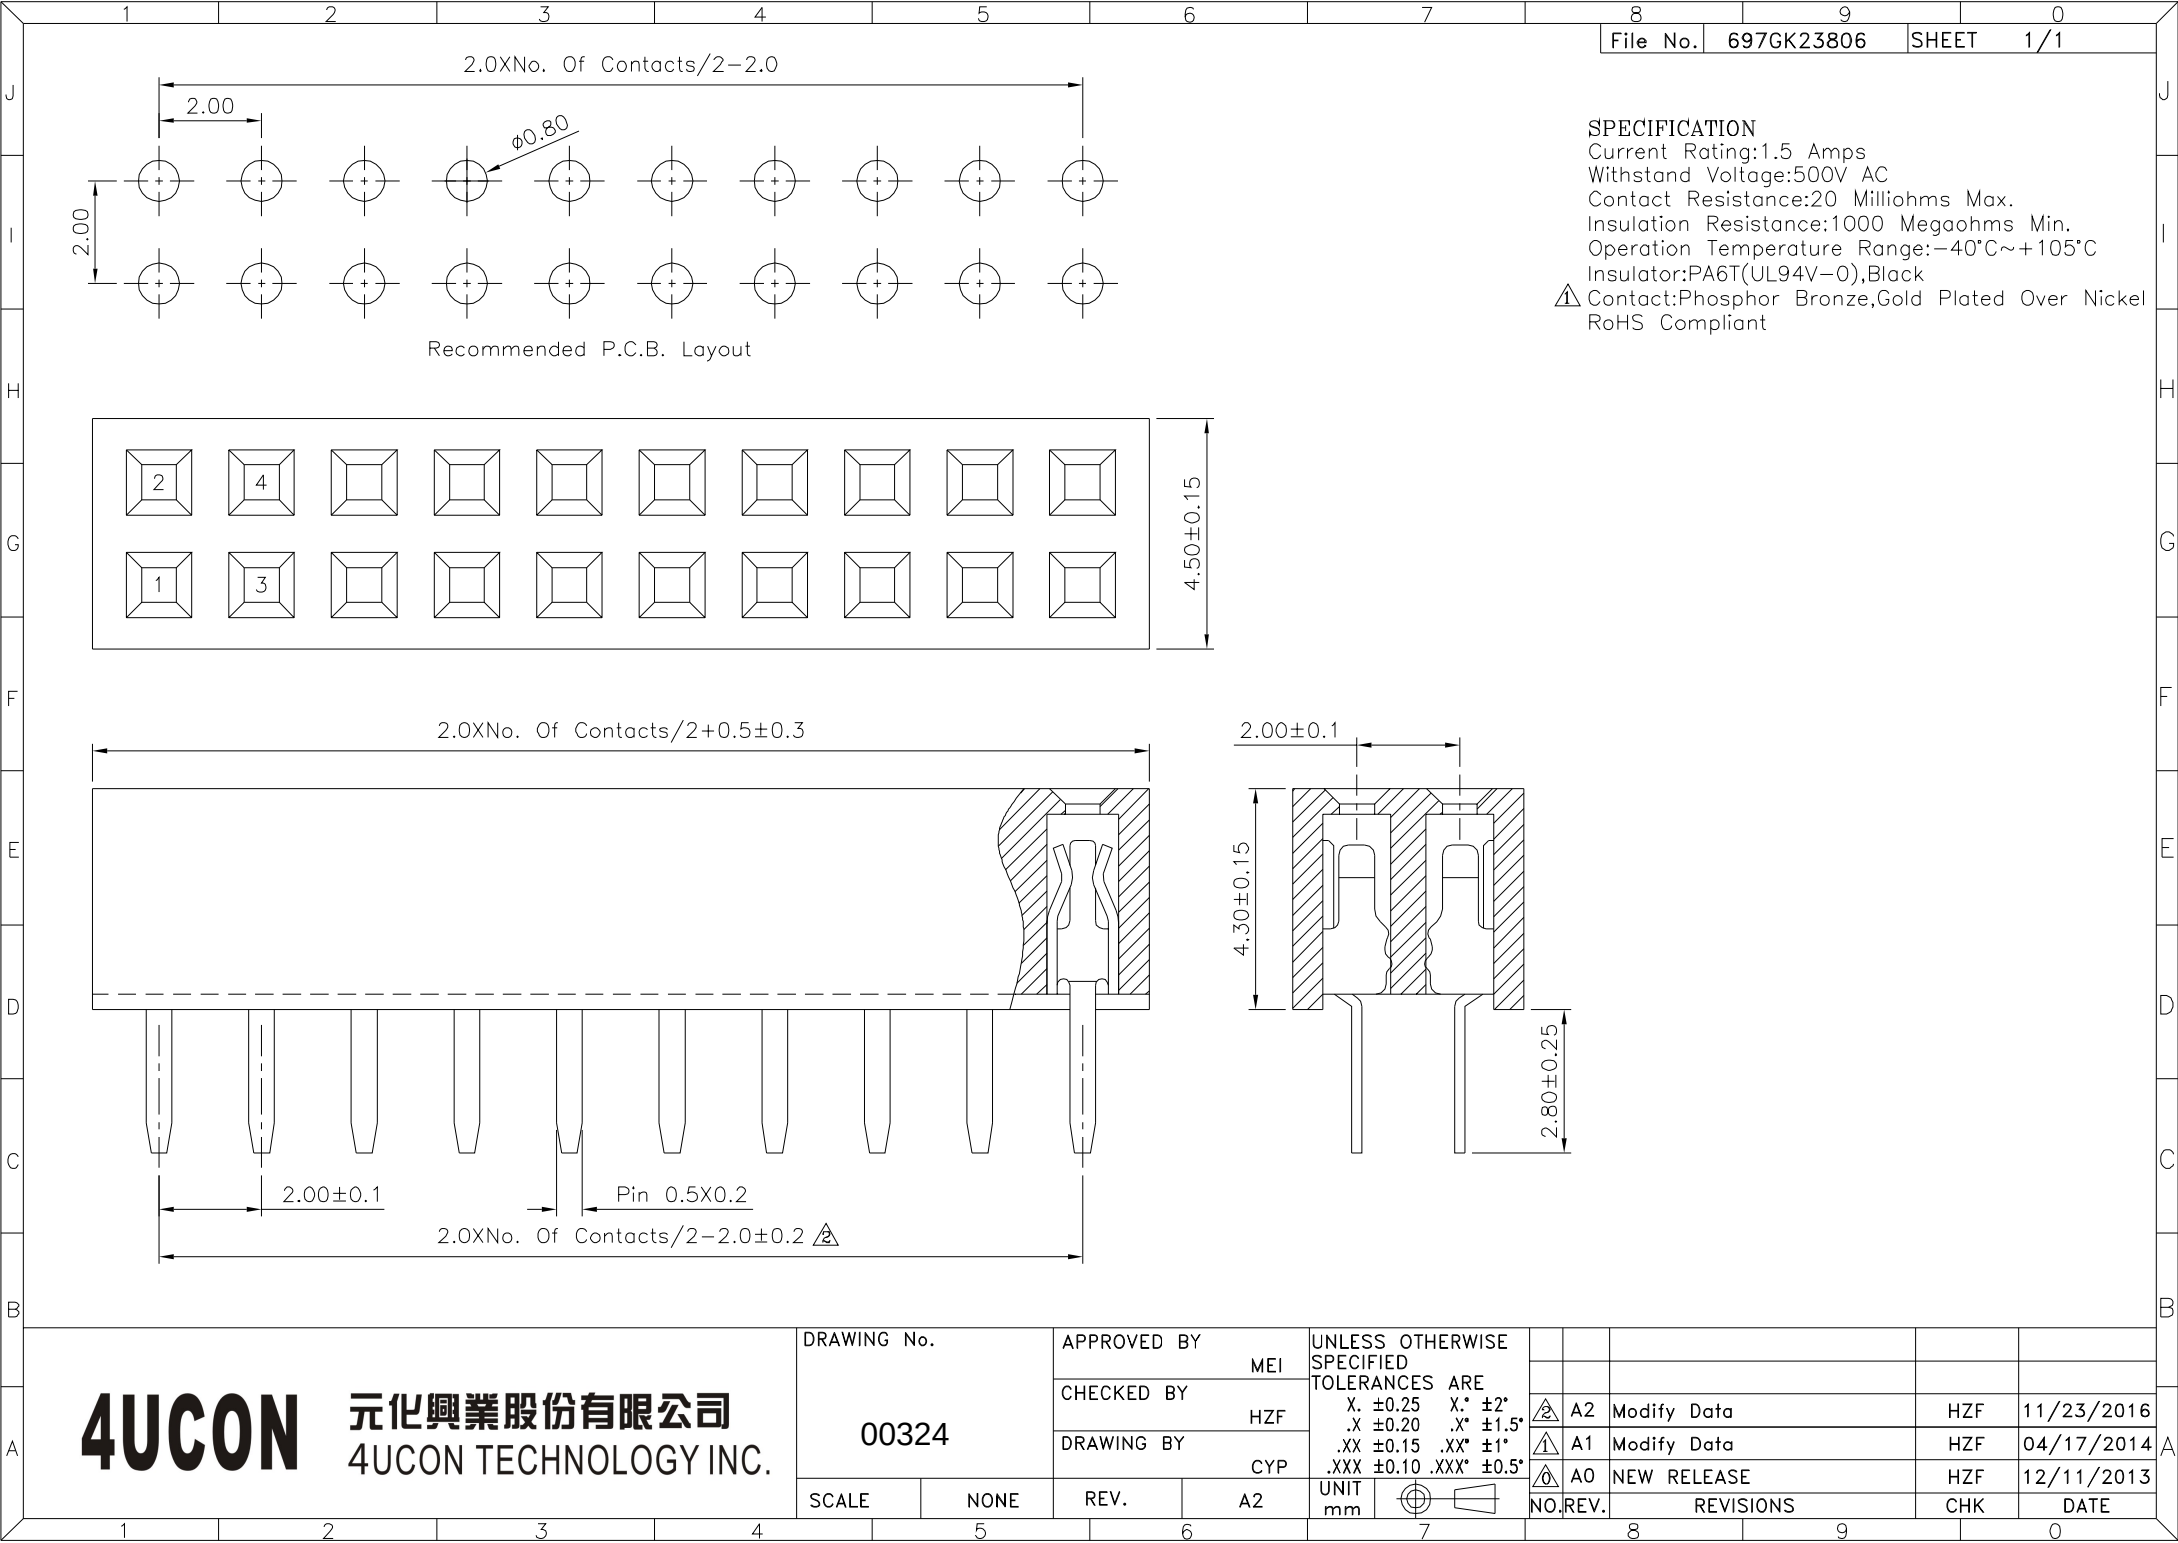

SPECIFICATION
Current Rating:1.5 Amps
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature Range:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
⚠ Contact:Phosphor Bronze,Gold Plated Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	HZF
00324		DRAWING BY	CYP
		SCALE	NONE
REV.		A2	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2* .X ±0.20 .X* ±1.5* .XX ±0.15 .XX* ±1* .XXX ±0.10 .XXX* ±0.5*		UNIT	
		mm	
		NO. REV.	
		REVISIONS	
		CHK	DATE
⚠ A2	Modify Data	HZF	11/23/2016
⚠ A1	Modify Data	HZF	04/17/2014
⚠ A0	NEW RELEASE	HZF	12/11/2013