

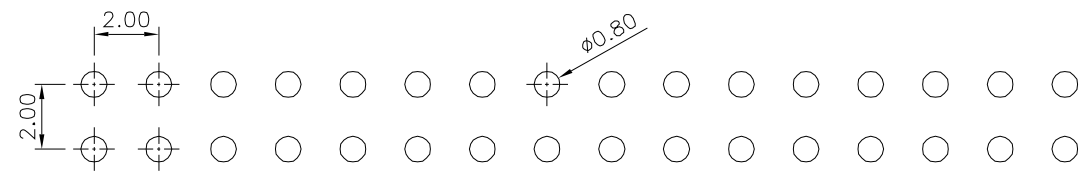


△ SPECIFICATION


Current Rating:1.5 Amp/Contact
 Withstand Voltage:450V AC/Minute
 Contact Resistance:20 Milliohms Max./Contact
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operation Temperature:-55°C~+105°C
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 RoHS Compliant

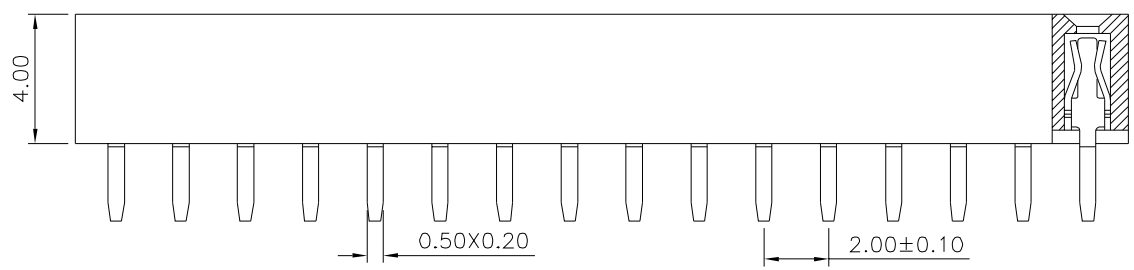

Recommended P.C.B. Layout

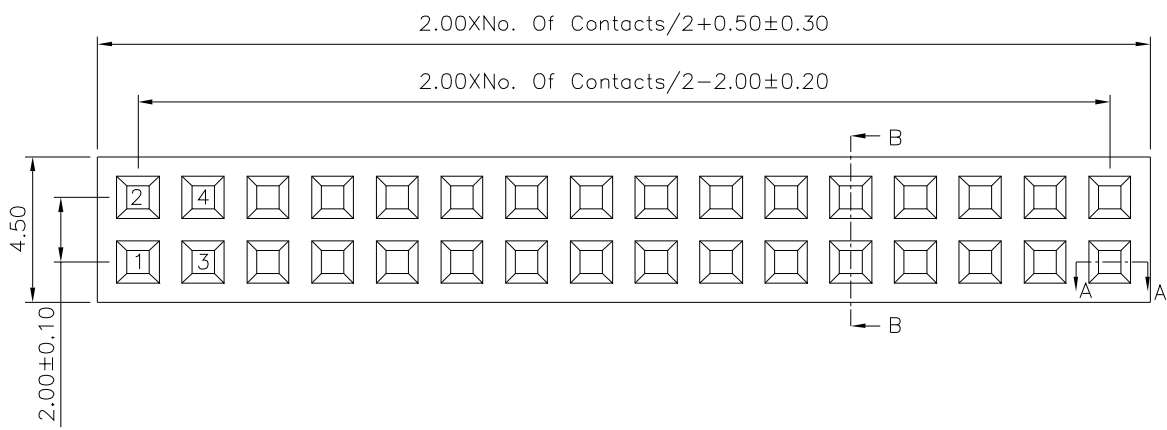


Section A-A



Section B-B

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± 0.10 ANG. $\pm 5^\circ$										
00345		MEI												
		HZF												
		DRAWING BY		<table border="1"> <tr> <td>NO.</td> <td>REV.</td> <td>REVISIONS</td> <td>CHK</td> <td>DATE</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	NO.	REV.	REVISIONS	CHK	DATE					
NO.	REV.	REVISIONS	CHK		DATE									
SCALE	NONE	REV.	A1	UNIT mm										



△ A1	Modify Data	HZF	10/16/2013
△ A0	NEW RELEASE	HZF	11/30/2011