


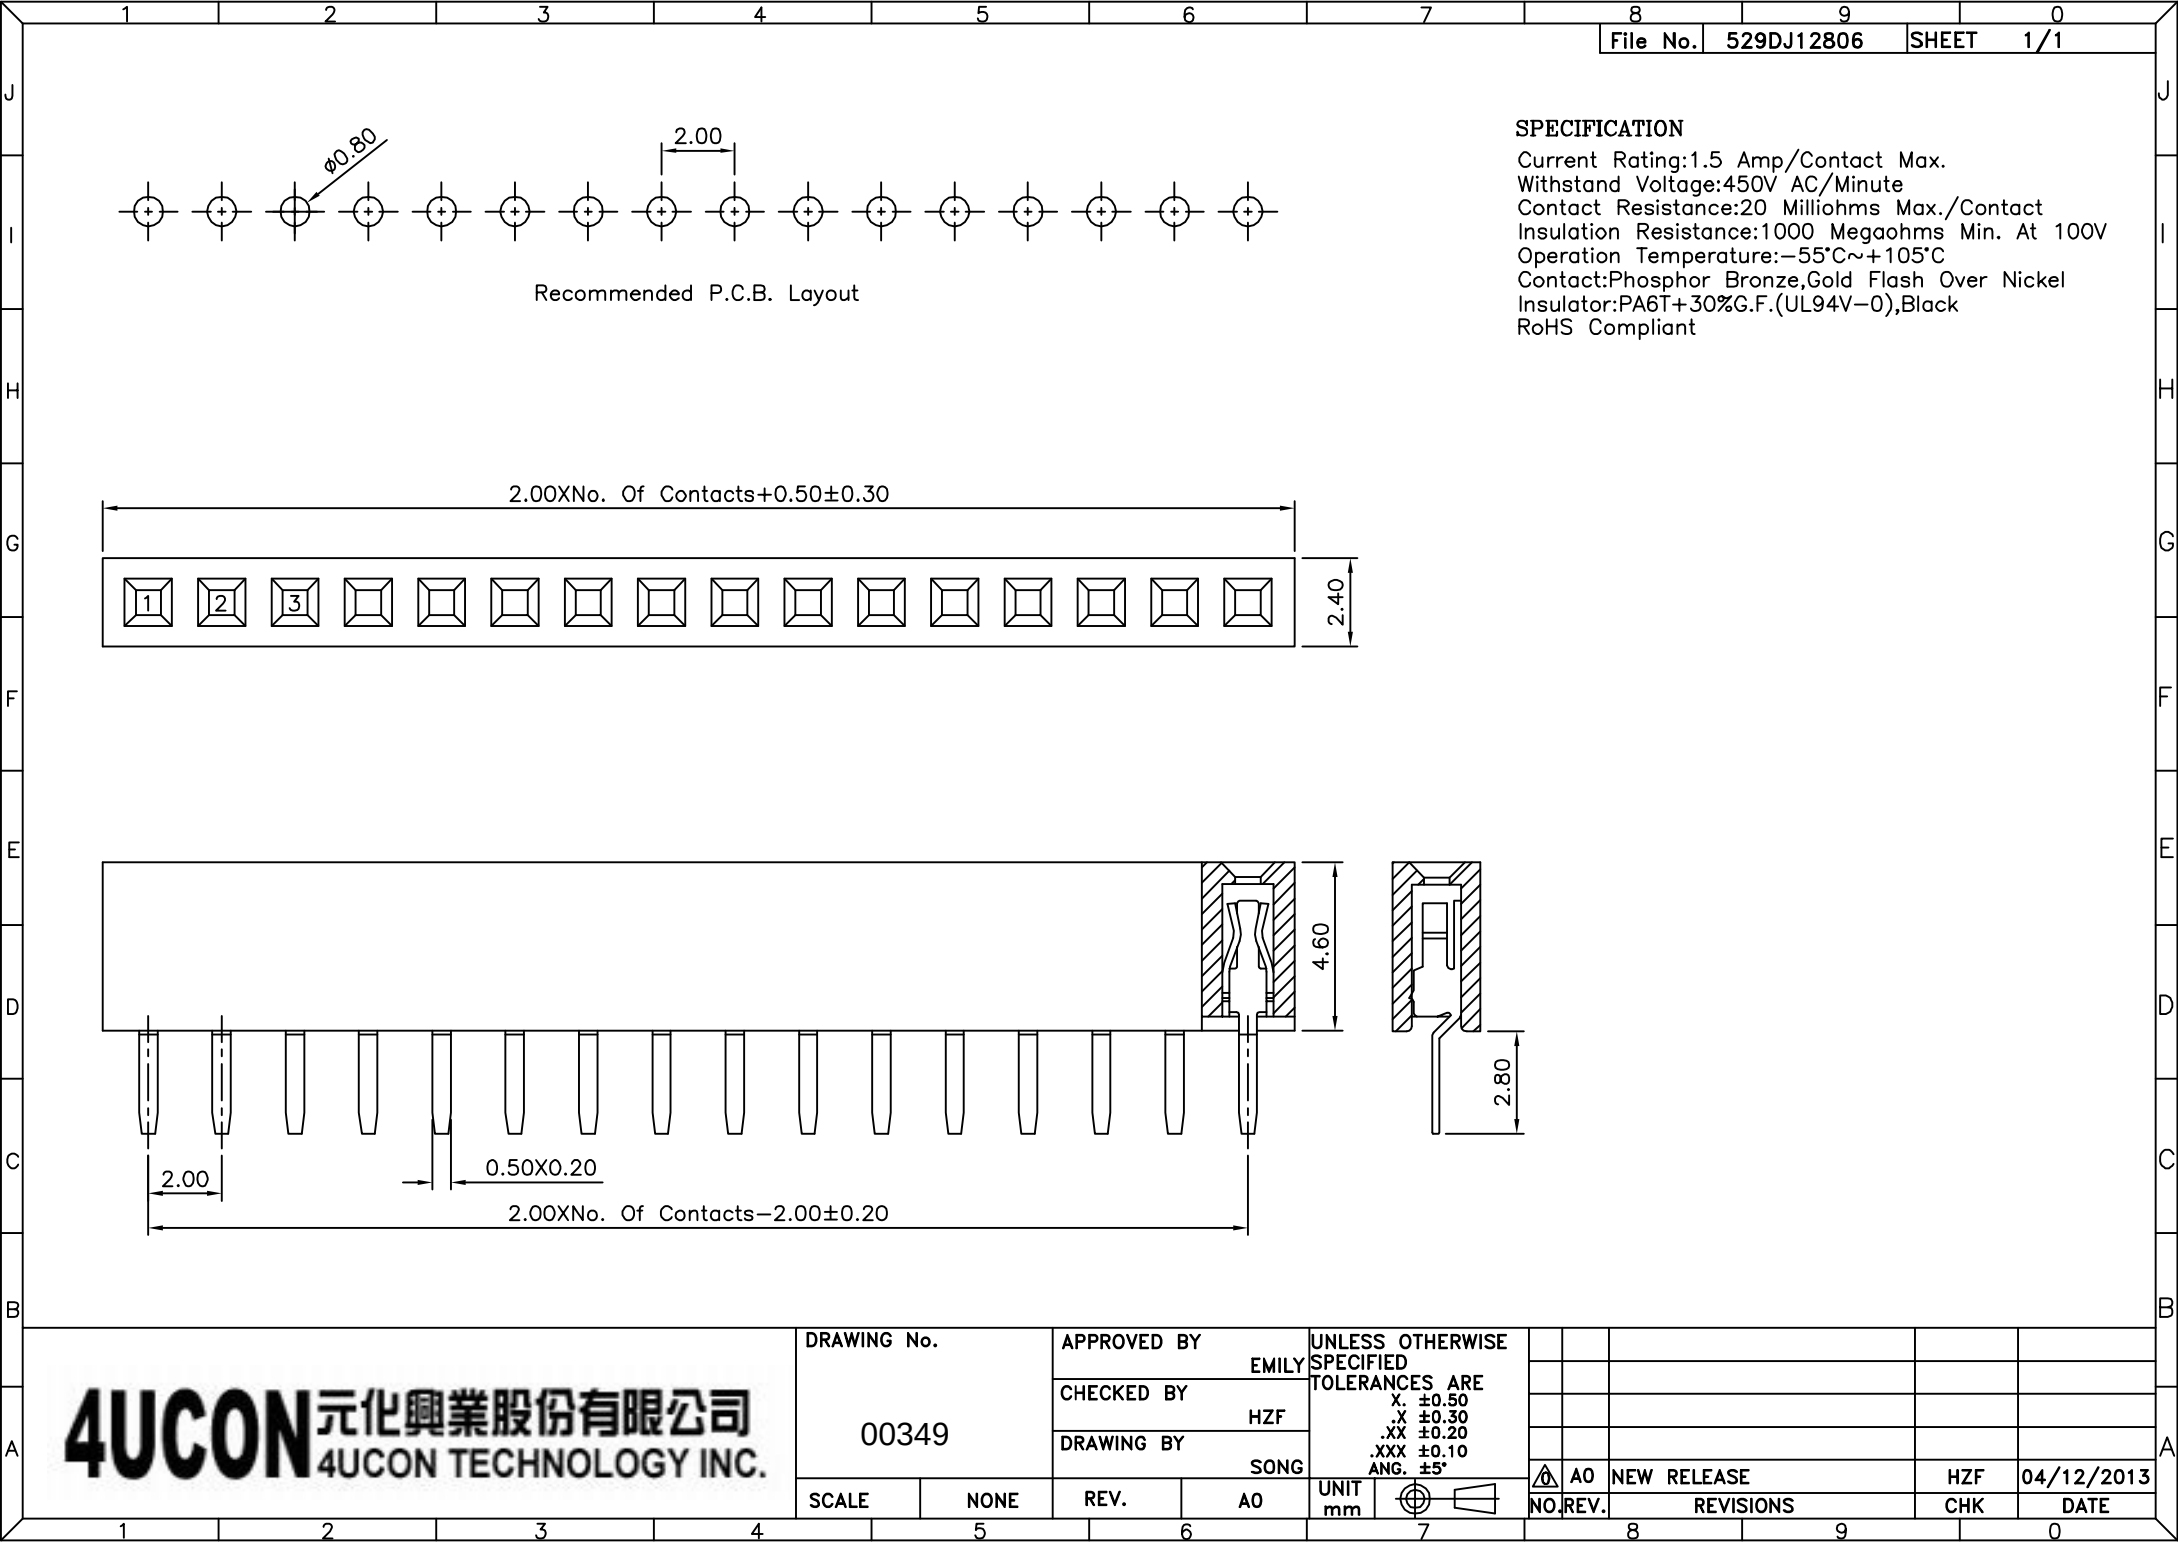

SPECIFICATION
Current Rating:1.5 Amp/Contact Max.
Withstand Voltage:450V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		EMILY	
		CHECKED BY	
00349		HZF	
		DRAWING BY	
		SONG	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE							
X. ± 0.50							
.X ± 0.30							
.XX ± 0.20							
.XXX ± 0.10							
ANG. $\pm 5^\circ$							
UNIT mm							
NO. REV.							
A0							
NEW RELEASE							
REVISIONS							
CHK							
DATE							
HZF							
04/12/2013							