

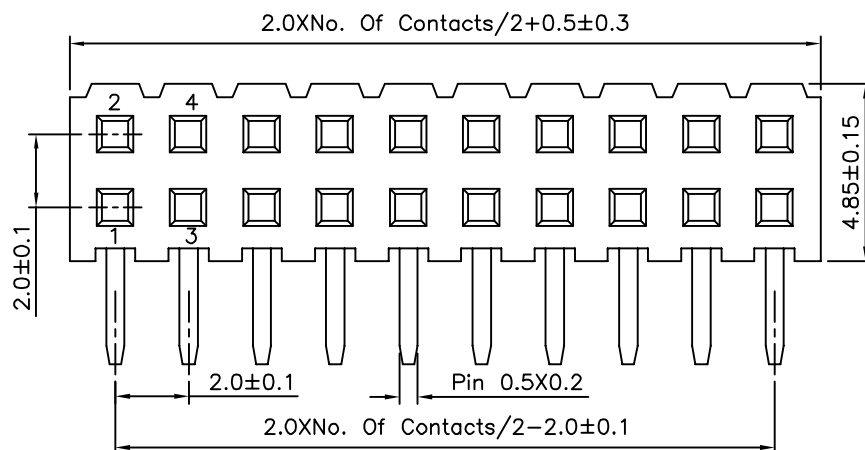


Recommended P.C.B. Layout

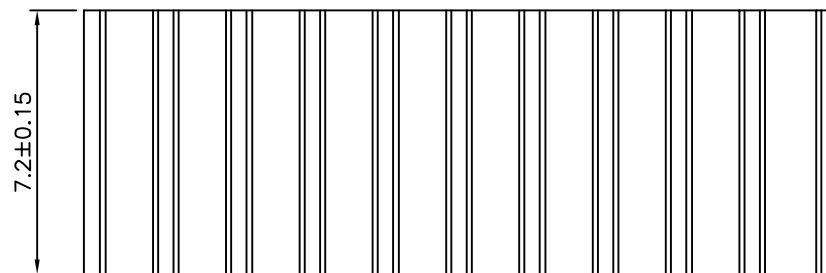

SPECIFICATION

Current Rating:1.5 Amp
 Withstand Voltage:500V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Plated Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00410

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 >80 ±1.20
 25~80 ±0.15
 5~25 ±0.10
 <5 ±0.05
 ANG. ±0.03°

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ A0

NEW RELEASE

HZF

12/25/2012