

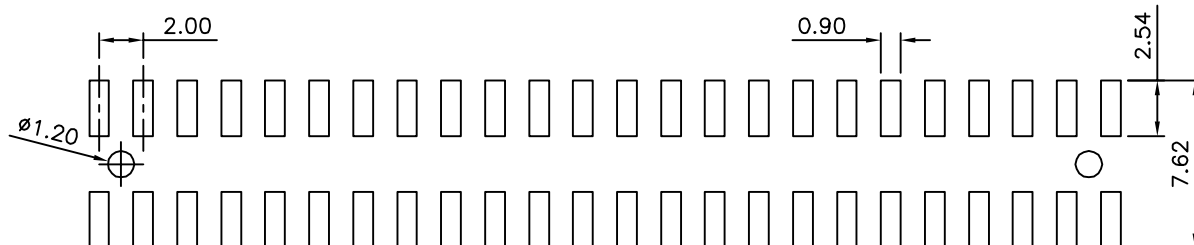



△ SPECIFICATION

Current Rating:1 Amps
 Insulator Resistance:5000 Megaohms Min.
 Dielectric Withstanding:500V AC
 Operating Temperature:-40~+105°C
 Max. Processing Temp:230° For 30 Seconds
 (260° For 7 Seconds)
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 Housing:LCP(UL94V-0),Black
 RoHS Compliant

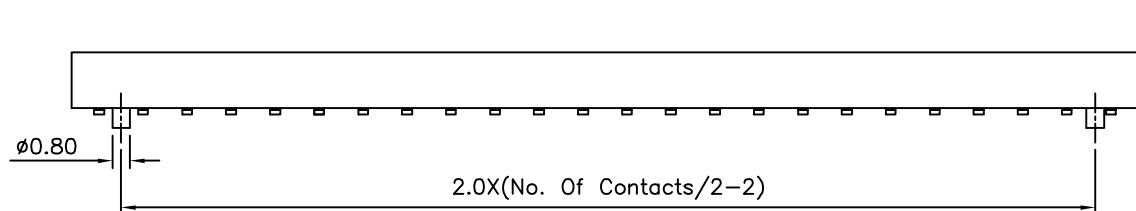

Recommended P.C.B. Layout

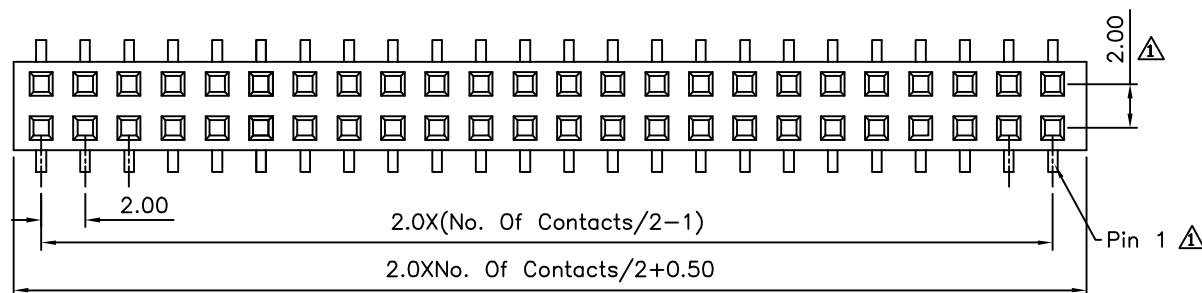

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00419

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.35
 .XX ±0.25
 .XXX ±0.05

UNIT
 mm



△ A1

Modify Data

HZF

11/07/2011

△ A0

NEW RELEASE

HZF

12/08/2006

NO. REV.

REVISIONS

CHK

DATE

SCALE

NONE

REV.

A1