


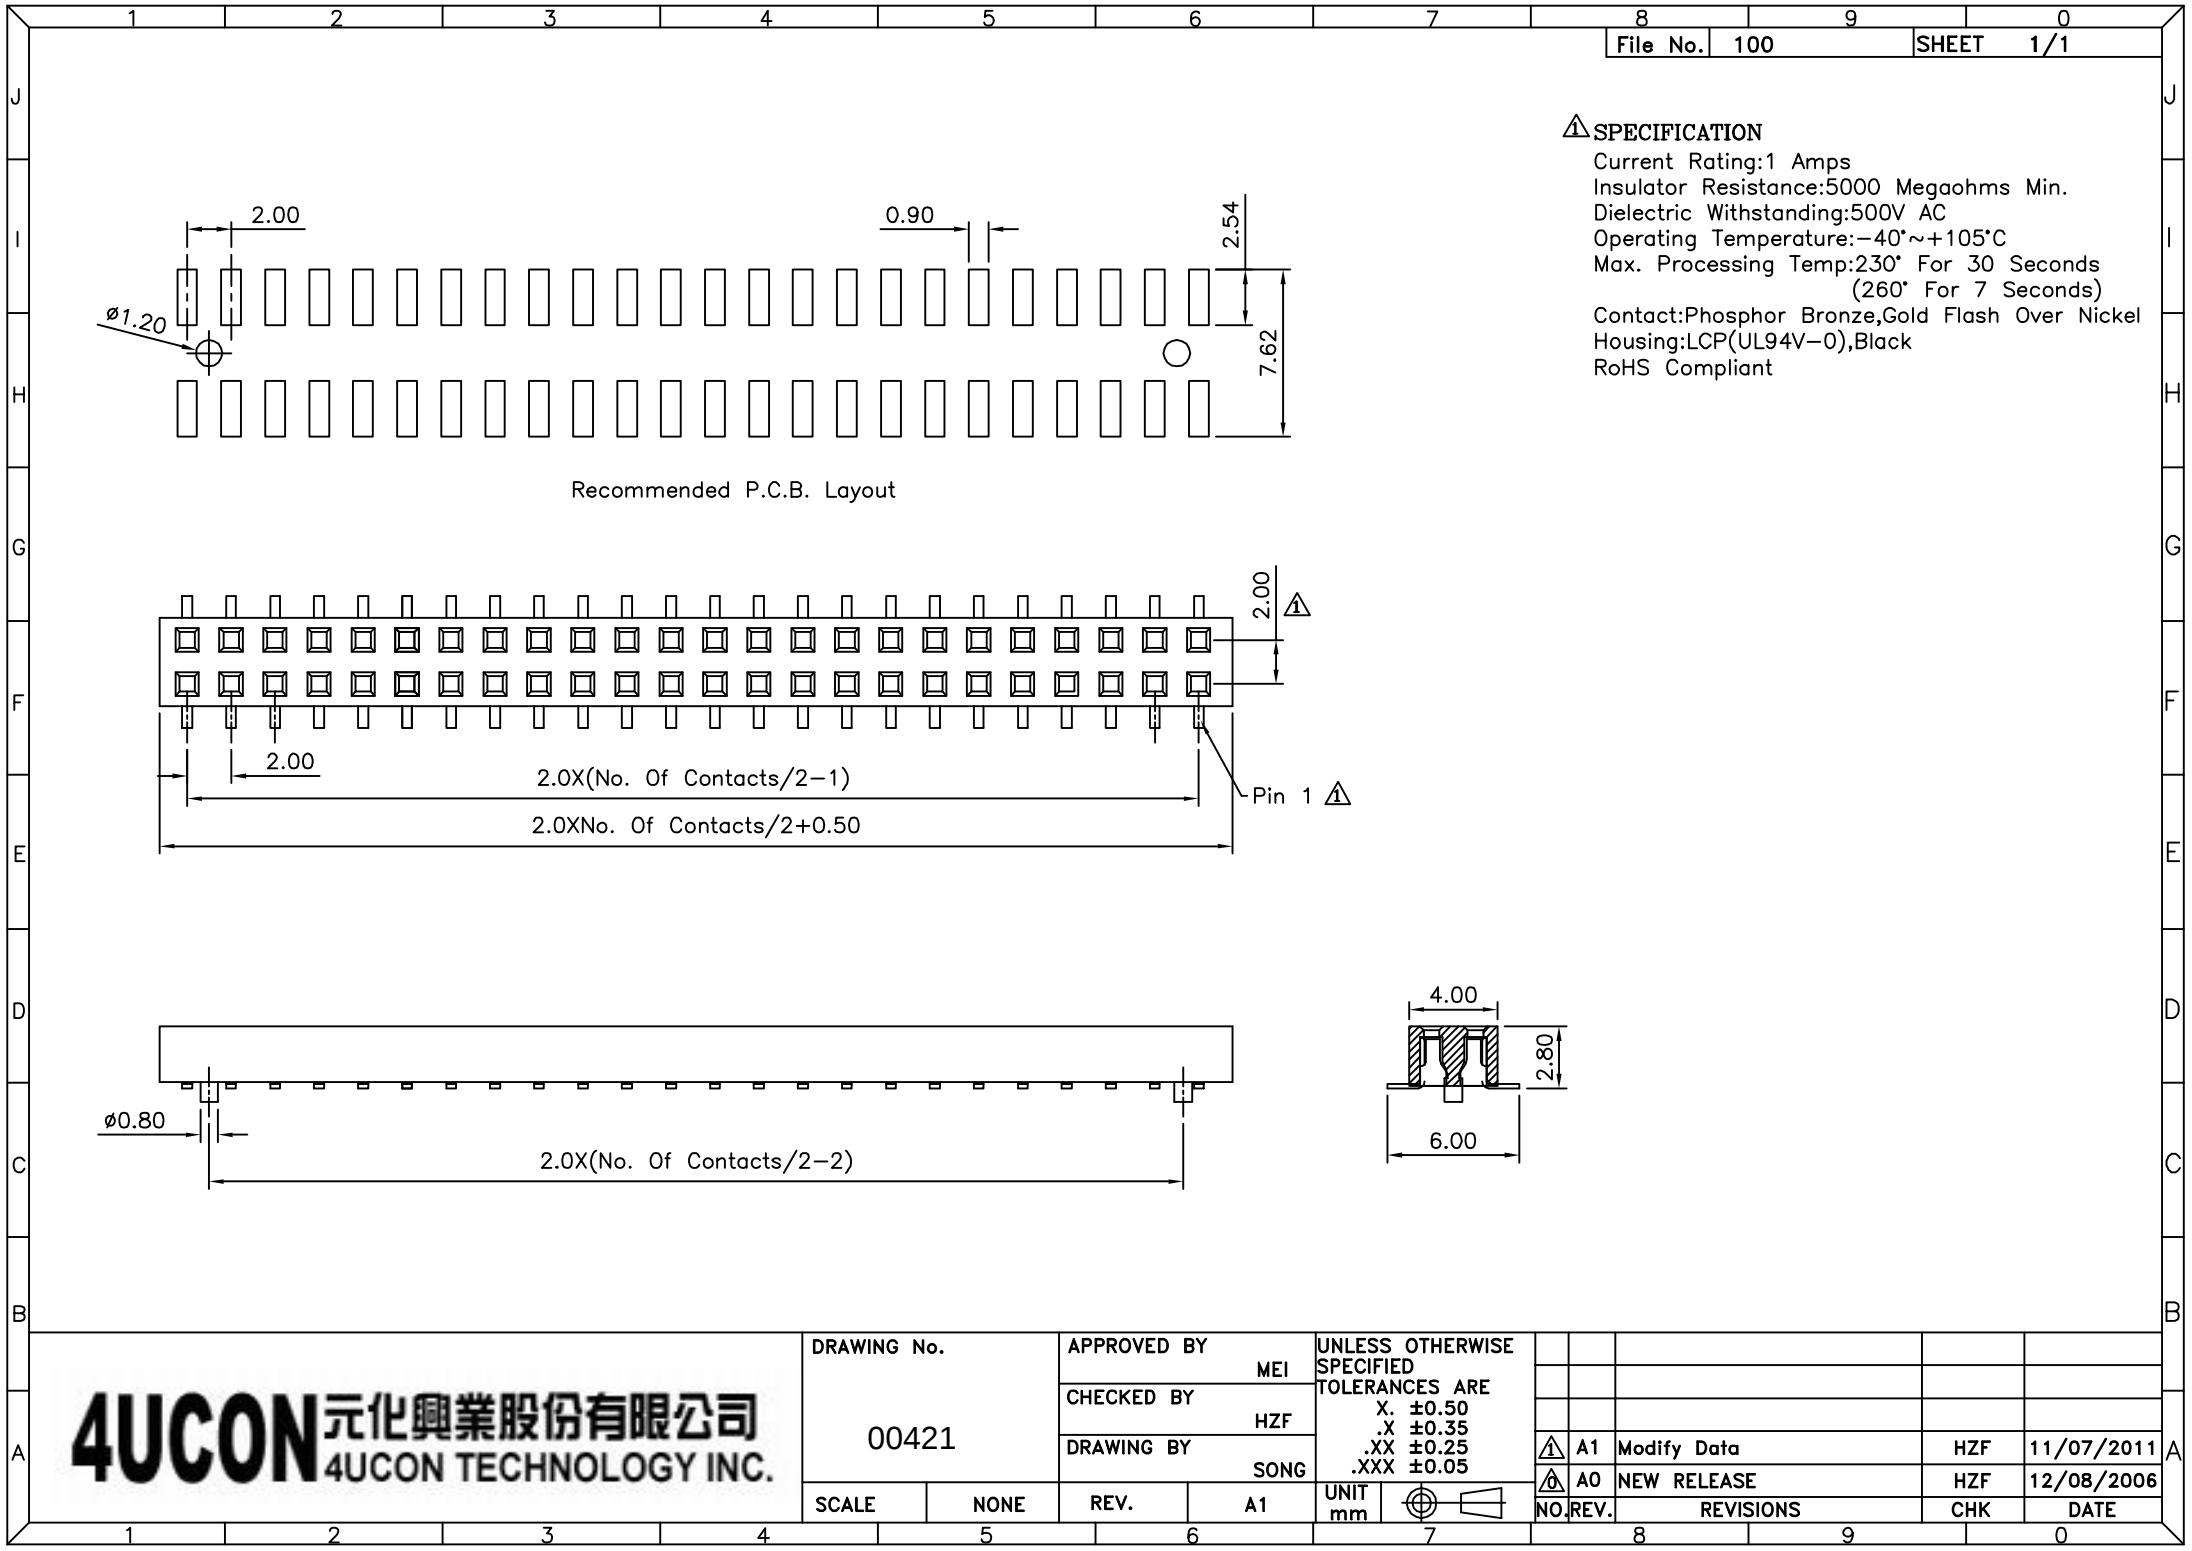


△ SPECIFICATION
Current Rating:1 Amps
Insulator Resistance:5000 Megaohms Min.
Dielectric Withstanding:500V AC
Operating Temperature:−40°~+105°C
Max. Processing Temp:230° For 30 Seconds
(260° For 7 Seconds)
Contact:Phosphor Bronze,Gold Flash Over Nickel
Housing:LCP(UL94V−0),Black
RoHS Compliant

Recommended P.C.B. Layout

2.00
Pin 1 △

2.0X(No. Of Contacts/2−1)
2.0XNo. Of Contacts/2+0.50

2.0X(No. Of Contacts/2−2)



4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 00421		APPROVED BY MEI	
		CHECKED BY HZF	
		DRAWING BY SONG	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.50 .X ±0.35 .XX ±0.25 .XXX ±0.05		UNIT	mm
		Ø	
		□	
		□	

NO.	REV.	REVISIONS	CHK	DATE
△ A1	Modify Data	HZF	11/07/2011	
△ A0	NEW RELEASE	HZF	12/08/2006	