

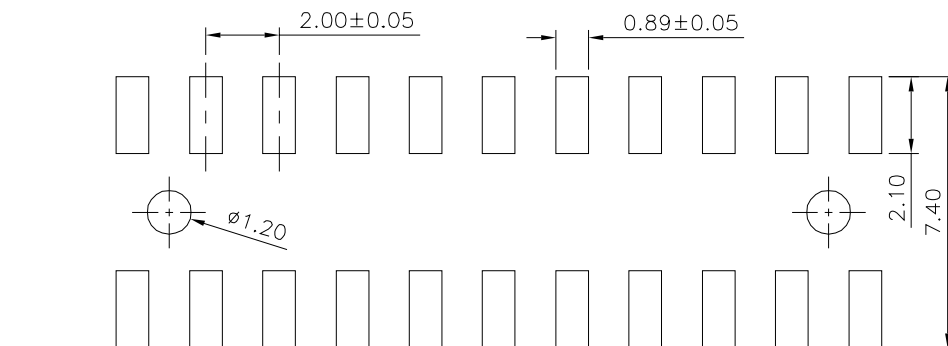



SPECIFICATION

Current Rating:1.5 Amp
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:−40°C~+105°C
 ⚠ Insulator:PA6T+30%G.F.(UL94V−0),Black
 Contact:Phosphor Bronze,Gold Plated Over Nickel
 RoHS Compliant

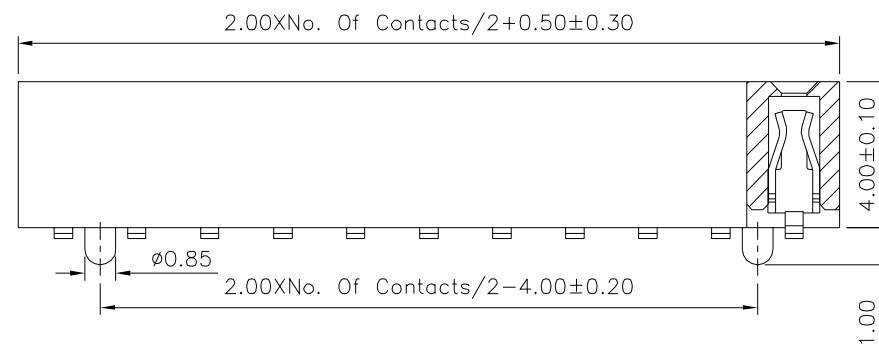

Recommended P.C.B. Layout

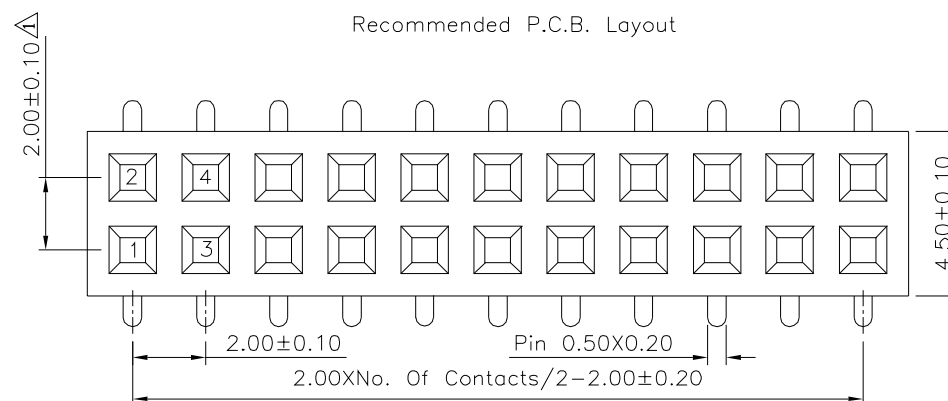

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. ⚠

00434

SCALE NONE

APPROVED BY EMILY

CHECKED BY HZF

DRAWING BY CYP

REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 ANG.

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠	A2	Modify Data	HZF	05/18/2015
⚠	A1	Modify Data	HZF	08/06/2013
⚠	A0	NEW RELEASE	HZF	09/11/2008