

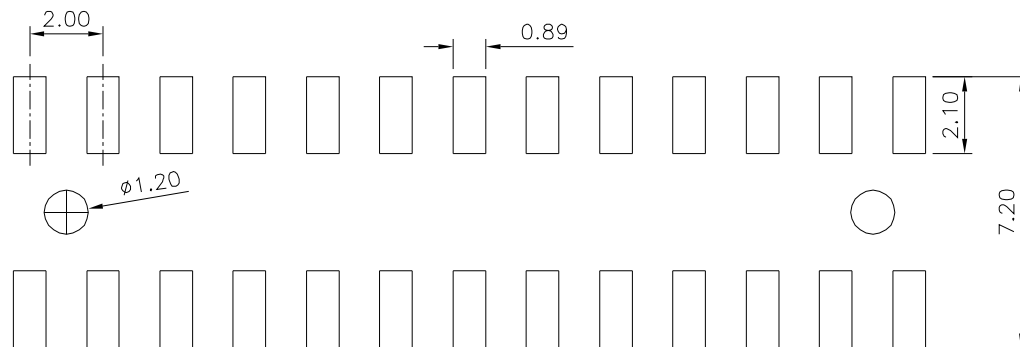



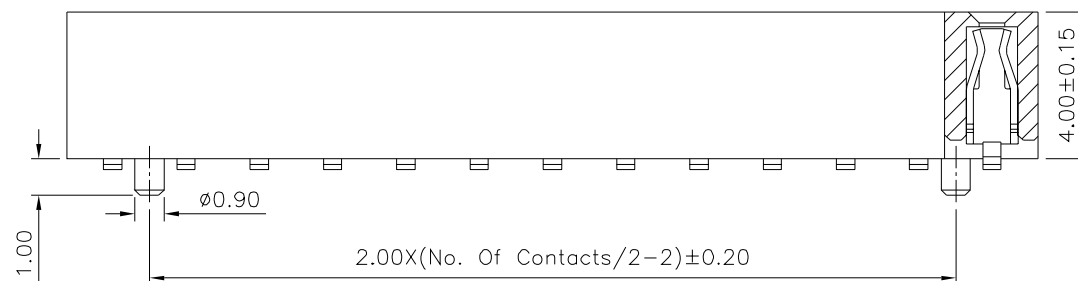

Recommended P.C.B. Layout

△ SPECIFICATION

Current Rating:1.5 Amps/Contact Max.
Withstand Voltage:450V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

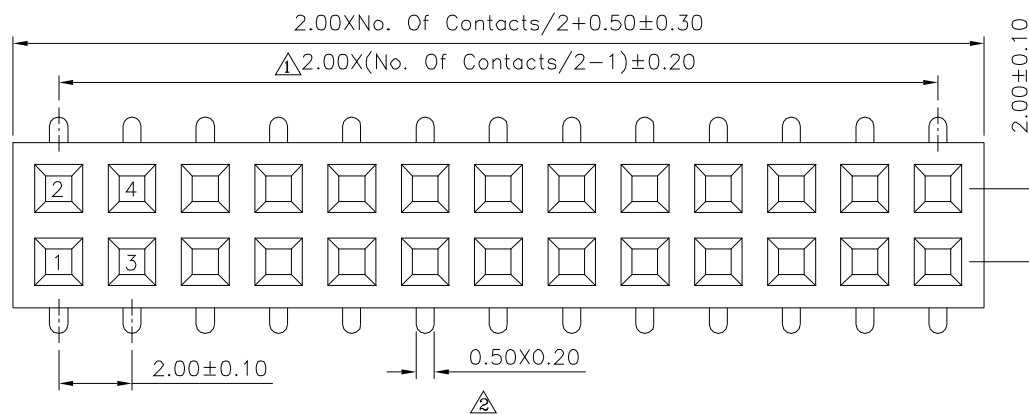

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

00437

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△ X. ±0.25
△ .X ±0.15
△ .XX ±0.10
△ .XXX ±0.05
△ ANG. ±5°

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	12/06/2017
△ A1		Modify Data	HZF	10/29/2015
△ A0		NEW RELEASE	HZF	08/17/2013