

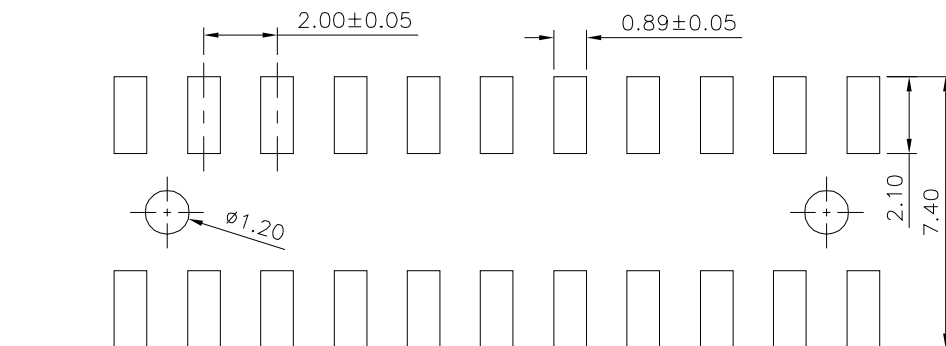



SPECIFICATION

Current Rating:1.5 Amp
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature: -40°C~+105°C
⚠ Insulator:PA6T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Plated Over Nickel
RoHS Compliant

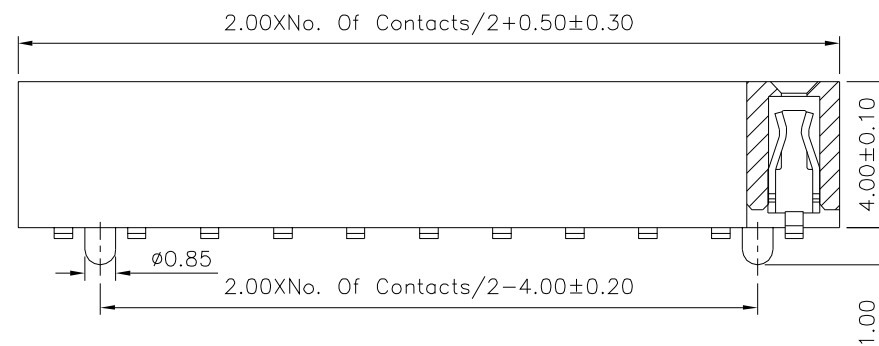

Recommended P.C.B. Layout

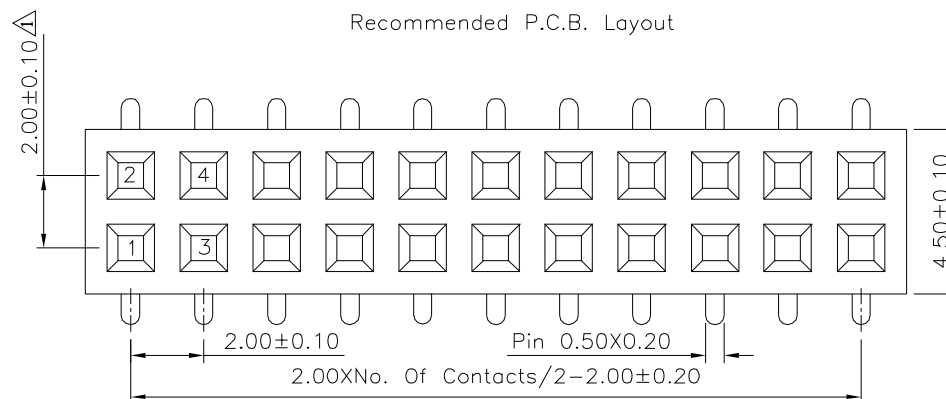

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. ⚠

00488

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20
ANG.

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
⚠	A2	Modify Data	HZF	05/18/2015
⚠	A1	Modify Data	HZF	08/06/2013
⚠	A0	NEW RELEASE	HZF	09/11/2008