
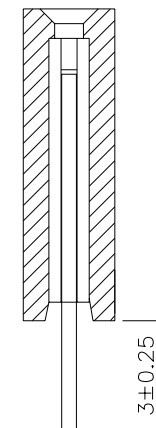


# SPECIFICATION

Current Rating:3 Amps

- Withstand Voltage:1000V AC Min./Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Contact:Brass,Gold Flash Over Nickel
- Insulator:PA6T(UL94V-0),Black
- RoHS Compliant

Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance±0.05)

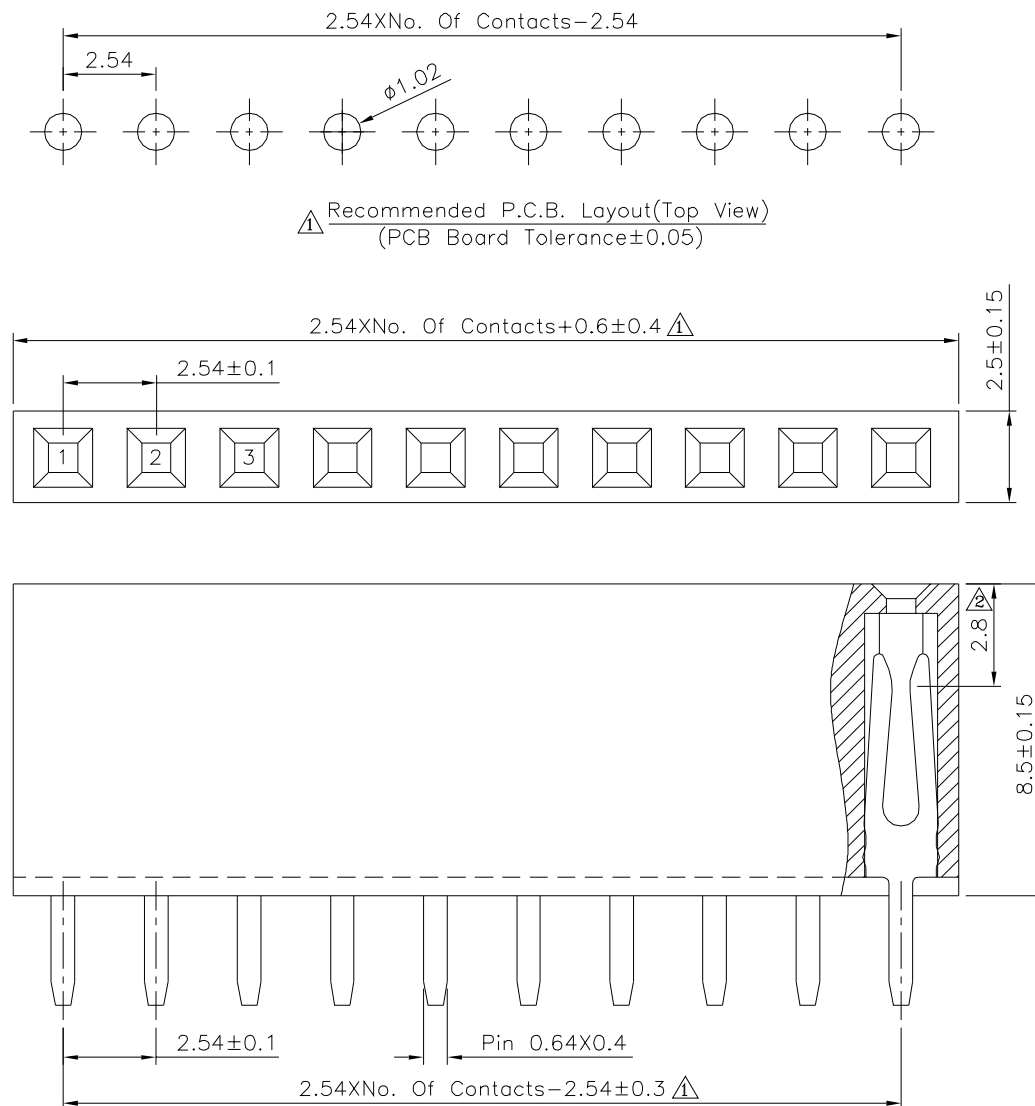

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

00532

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN

SCALE

NONE

REV.


A2

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

|            |             |
|------------|-------------|
| X. ±0.25   | X.* ±2°     |
| .X ±0.20   | .X* ±1.5°   |
| .XX ±0.15  | .XX* ±1°    |
| .XXX ±0.10 | .XXX* ±0.5° |

UNIT

mm



NO.REV.

REVISIONS

CHK

DATE

| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| 2   | A2   | Modify Data | HZF | 11/06/2021 |
| 1   | A1   | Modify Data | HZF | 05/28/2014 |
| 0   | A0   | NEW RELEASE | HZF | 04/04/2013 |