
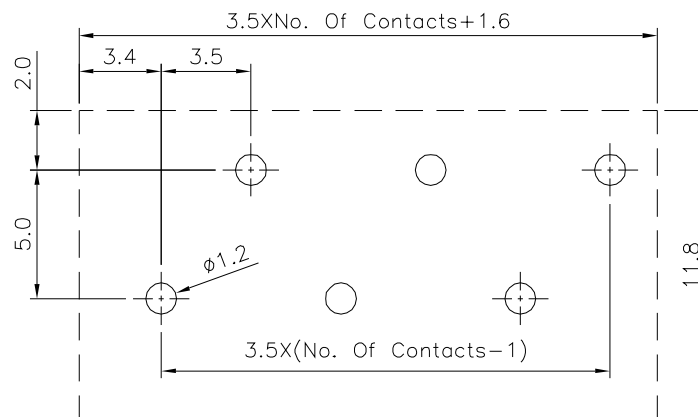
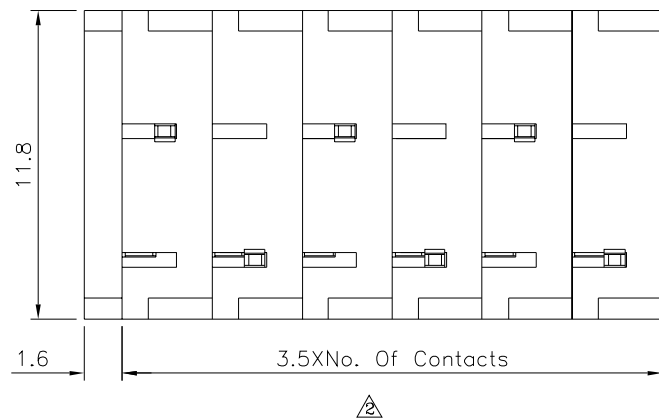
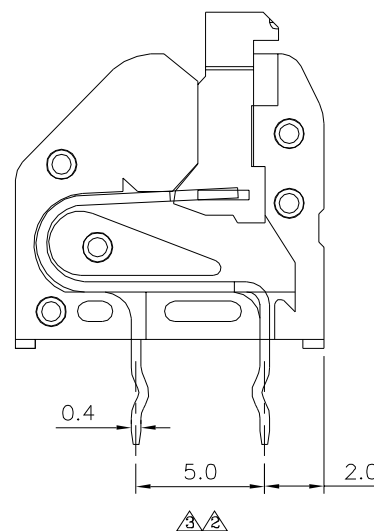


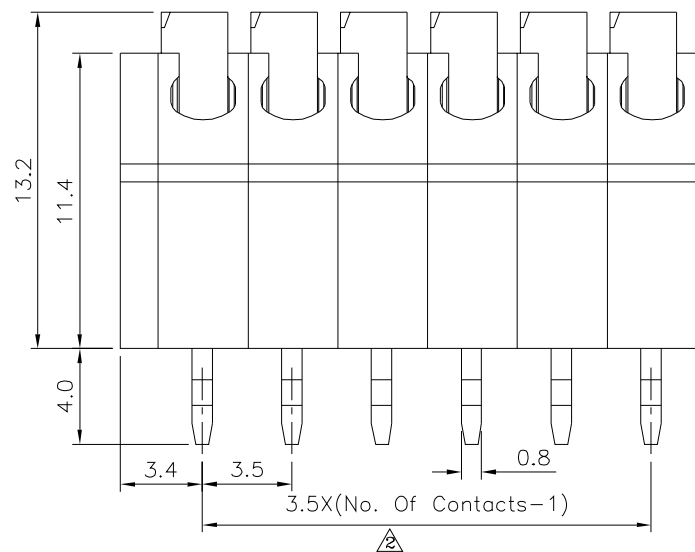

Recommended P.C.B. Layout

SPECIFICATION

Current Rating:5 Amp/Way Max.
Voltage Rating:300V AC
Contact Resistance:20 Milliohms Max.
Withsanding Voltage:2500V AC(1 Minute)
Test Time=60s/1 PCS
Wire Range:16~20 AWG
Operation Temperature:-40°C~+105°C
Soldering Reliability:Test Temperature:
250°C±10°C/5s Max.
Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Gray
Surface Of Solder Tails:Copper Alloy,Tin Plated
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 00588

00588

SCALE NONE

APPROVED BY EMILY

CHECKED BY HZF

DRAWING BY HAO

REV. A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

UNIT mm

A4	Modify Data	HZF	05/21/2015
A3	Modify Data	HZF	01/16/2014
A2	Modify Data	HZF	07/20/2013
A1	Modify Data	HZF	03/01/2011
A0	NEW RELEASE	HZF	01/15/2010
NO. REV.	REVISIONS	CHK	DATE