
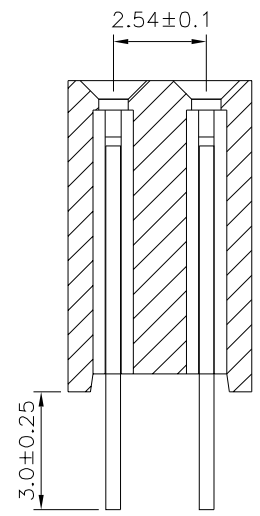
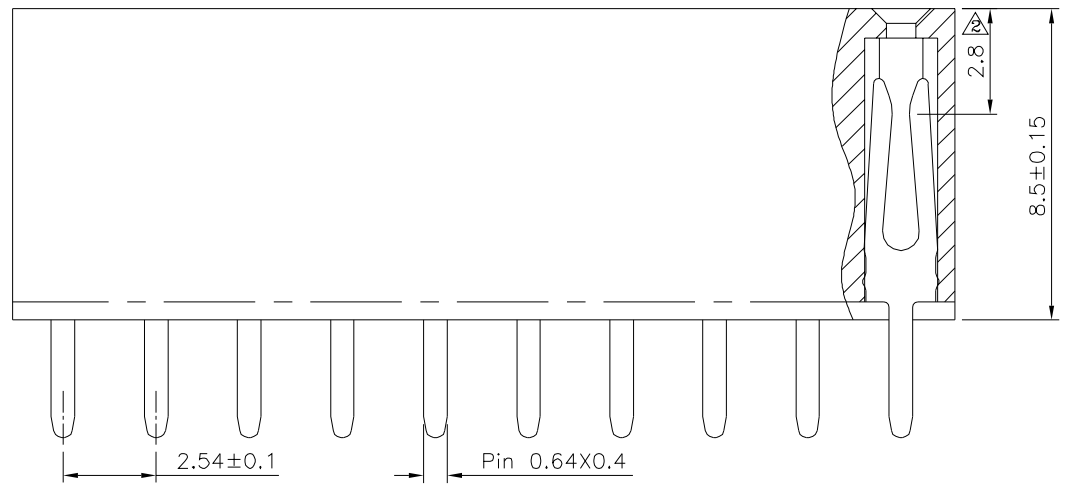


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

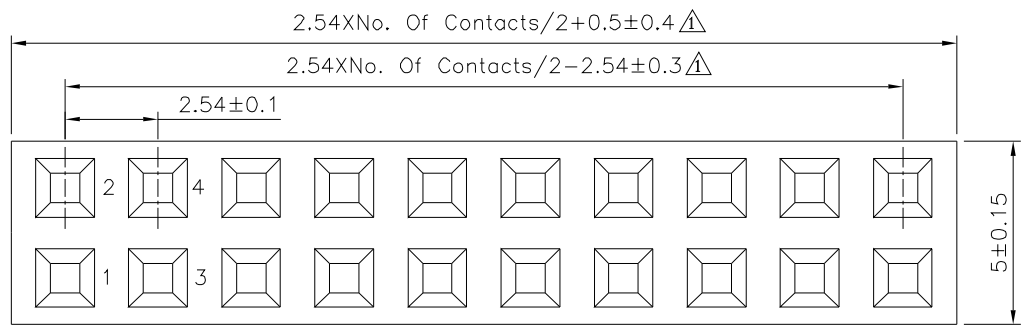

SPECIFICATION

- Current Rating:3A
- ② Withstand Voltage:1000V AC Min./Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megohms Min.
- Operation Temperature:-40°C~+105°C
- ③ Housing:PA9T(UL94V-0),Black
- Contact:Brass,Gold Flash Over Nickel
- RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

| | | | | | | | | |
|-------------|------|-------------|----|---|----------|-----------|-----|------|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ± 0.25 X.* $\pm 2^{\circ}$.X ± 0.20 .X* $\pm 1.5^{\circ}$.XX ± 0.15 .XX* $\pm 1^{\circ}$.XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$ | NO. REV. | REVISIONS | CHK | DATE |
| 00592 | | EMILY | | | | | | |
| | | HZF | | | | | | |
| | | SAN | | | | | | |
| SCALE | NONE | REV. | A3 | UNIT | mm | | | |

| | | | | |
|---|----|-------------|-----|------------|
| ③ | A3 | Modify Data | HZF | 05/16/2024 |
| ② | A2 | Modify Data | HZF | 11/06/2021 |
| ① | A1 | Modify Data | HZF | 05/28/2014 |
| ④ | A0 | NEW RELEASE | HZF | 04/08/2013 |