


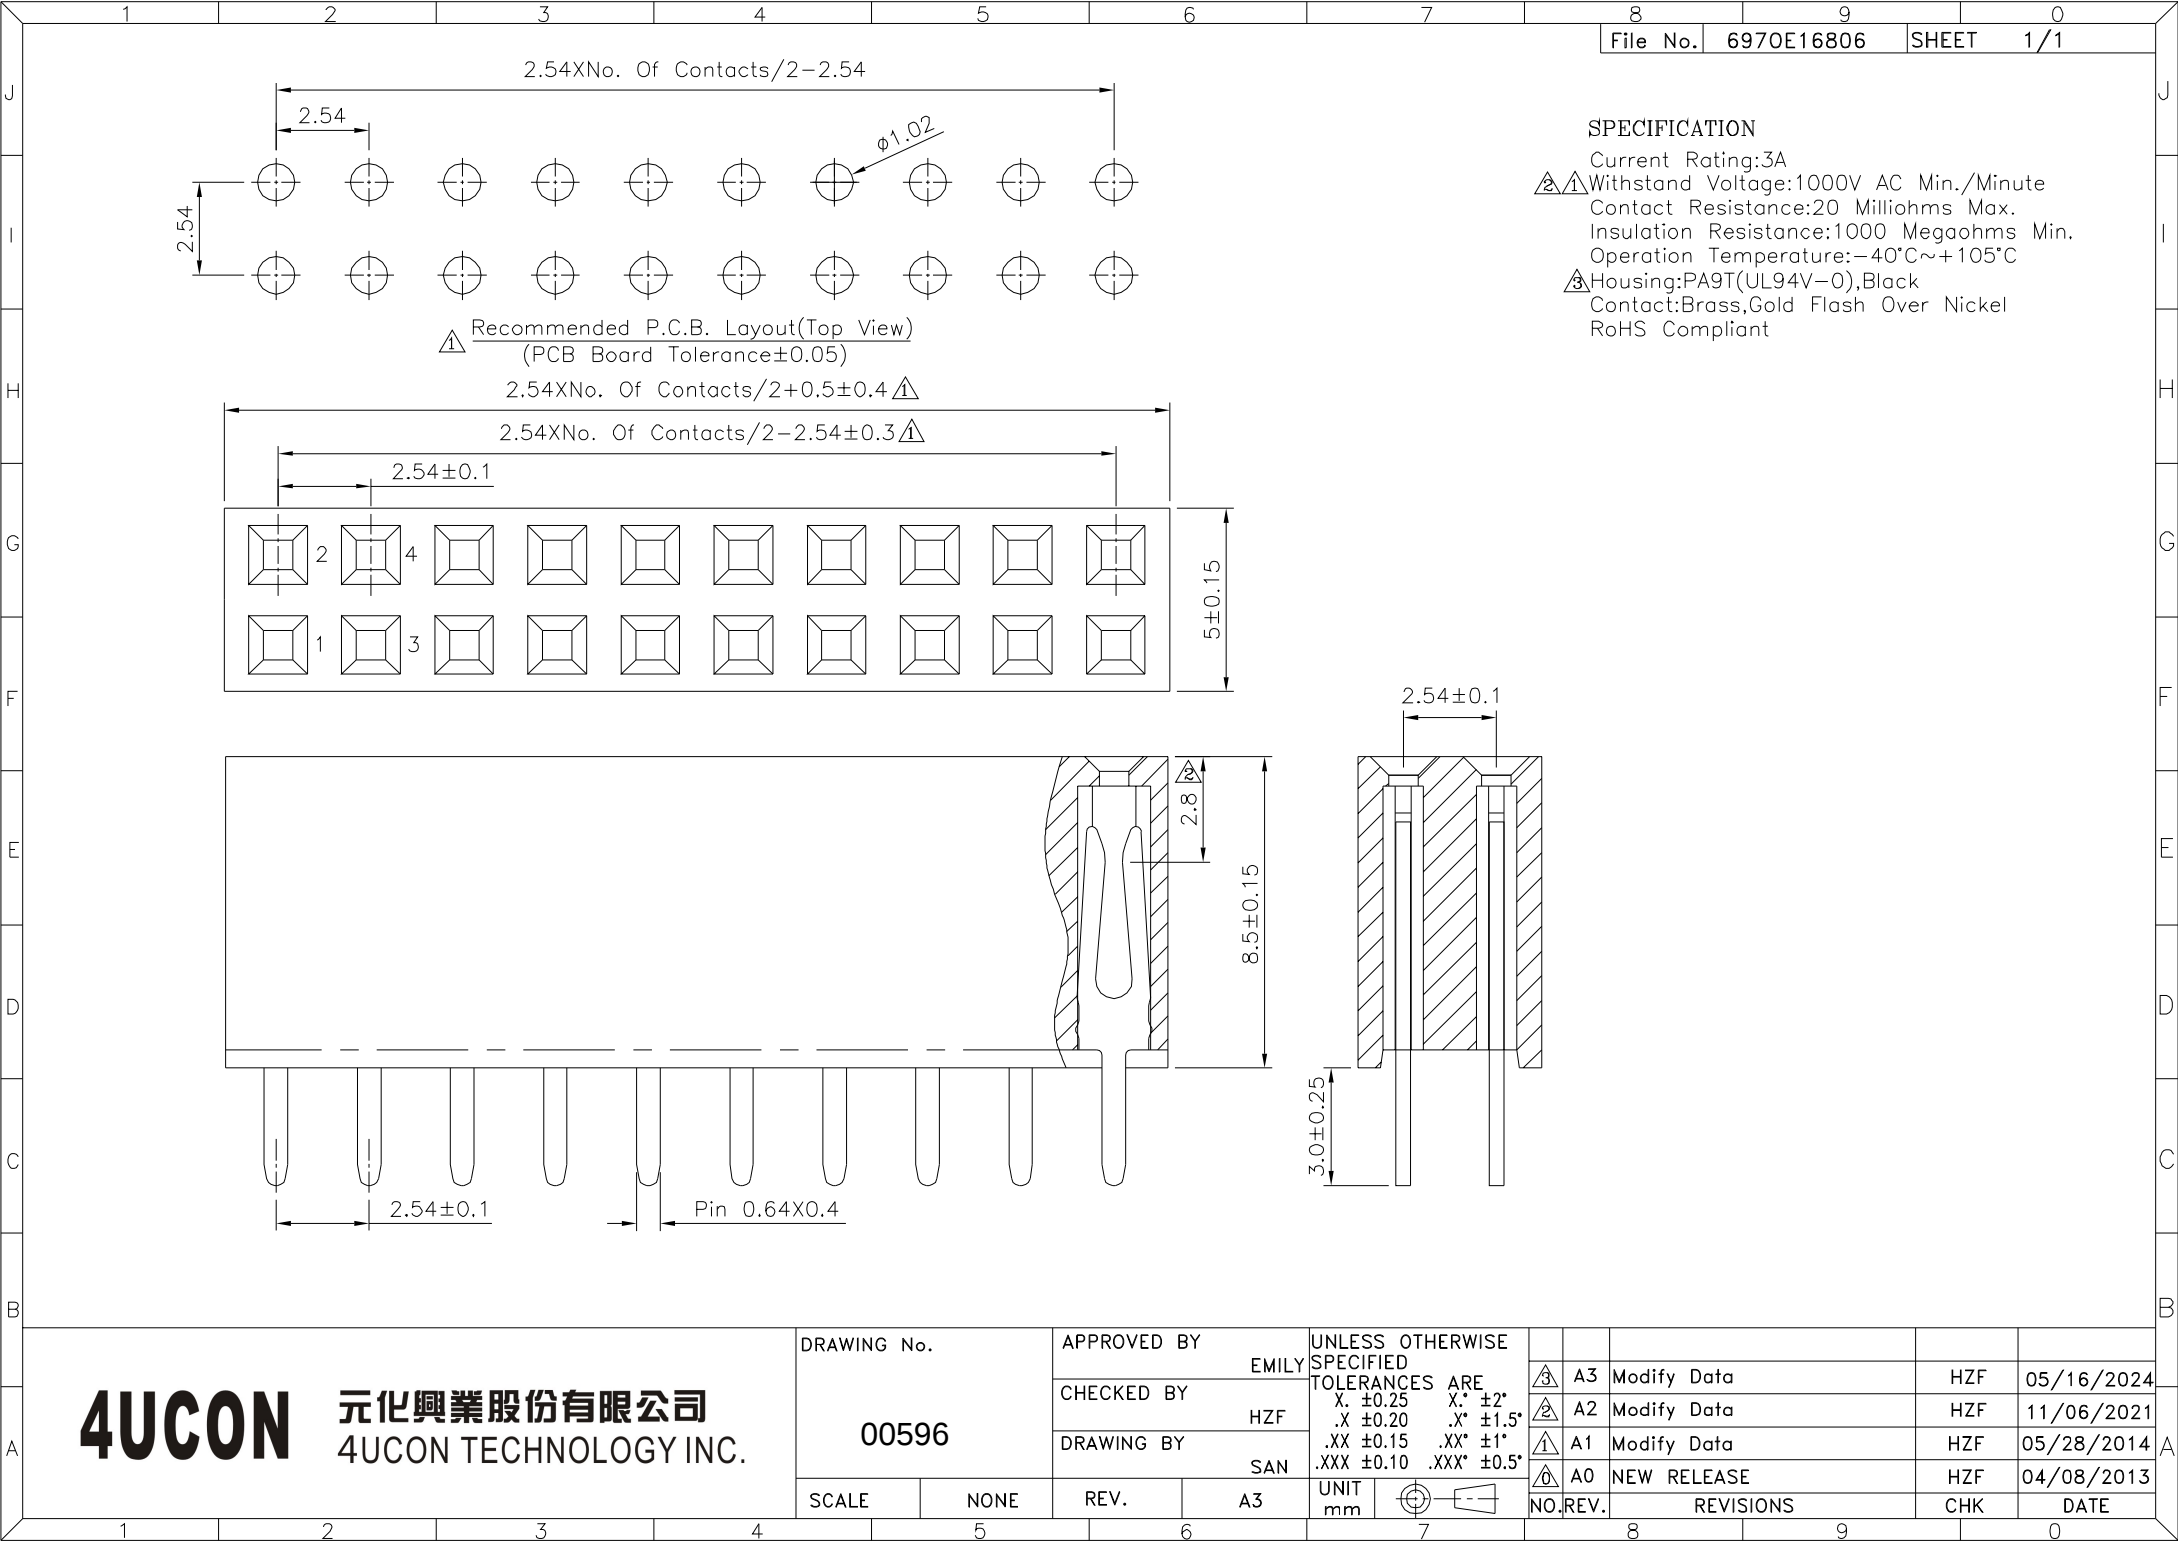

SPECIFICATION

- Current Rating:3A
- Withstand Voltage:1000V AC Min./Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Housing:PA9T(UL94V-0),Black
- Contact:Brass,Gold Flash Over Nickel
- RoHS Compliant

4Ucon 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 00596		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2* .X ±0.20 .X* ±1.5* .XX ±0.15 .XX* ±1* .XXX ±0.10 .XXX* ±0.5*						
		EMILY			③	A3	Modify Data	HZF	05/16/2024	
		CHECKED BY			②	A2	Modify Data	HZF	11/06/2021	
		HZF			①	A1	Modify Data	HZF	05/28/2014	
		DRAWING BY			④	A0	NEW RELEASE	HZF	04/08/2013	
		SAN								
SCALE	NONE	REV.	A3	UNIT mm		NO.	REV.	REVISIONS	CHK	DATE