


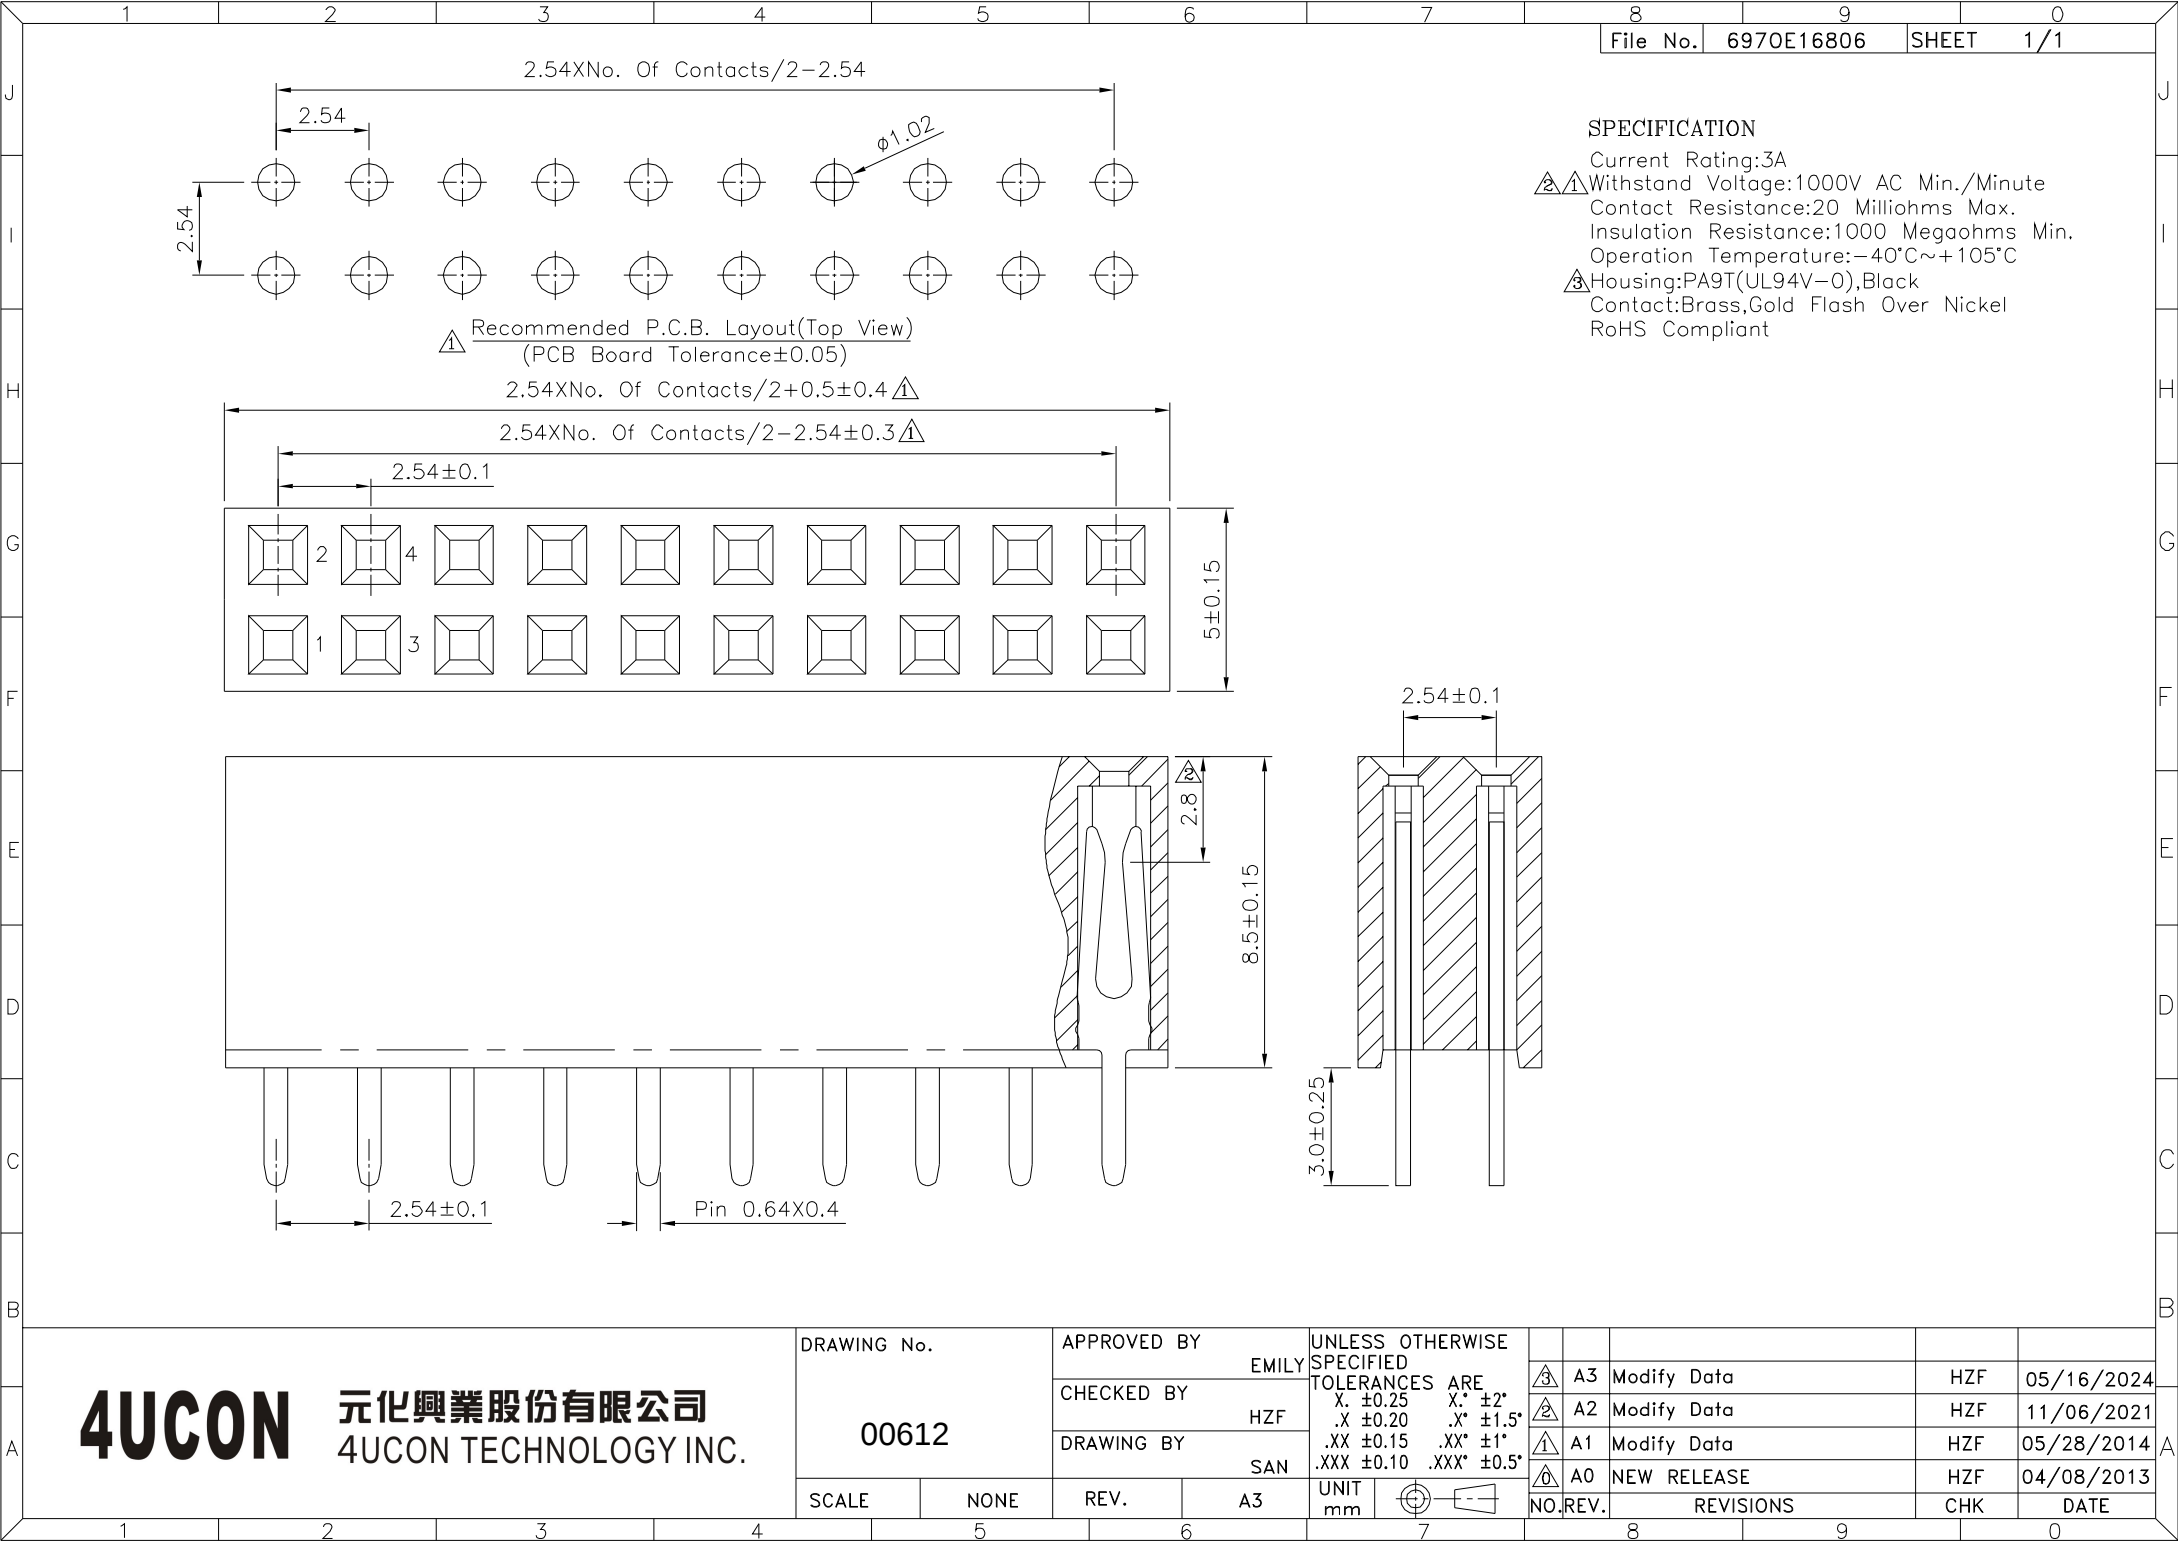

SPECIFICATION

- Current Rating:3A
- Withstand Voltage:1000V AC Min./Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Housing:PA9T(UL94V-0),Black
- Contact:Brass,Gold Flash Over Nickel
- RoHS Compliant

4Ucon 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		EMILY	
		CHECKED BY	
00612		HZF	
		DRAWING BY	
		SAN	
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
X. ±0.25	X.* ±2°				
.X ±0.20	.X* ±1.5°				
.XX ±0.15	.XX* ±1°				
.XXX ±0.10	.XXX* ±0.5°				
UNIT	mm				
NO.	REV.	REVISIONS	CHK	DATE	
3	A3	Modify Data	HZF	05/16/2024	
2	A2	Modify Data	HZF	11/06/2021	
1	A1	Modify Data	HZF	05/28/2014	
0	A0	NEW RELEASE	HZF	04/08/2013	