

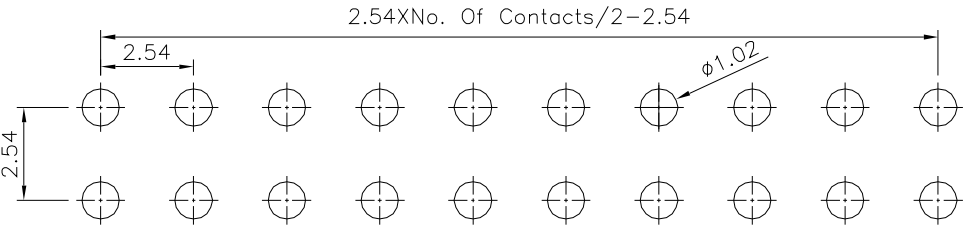



SPECIFICATION

- Current Rating:3 Amps
⚠ Withstanding Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
⚠ Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

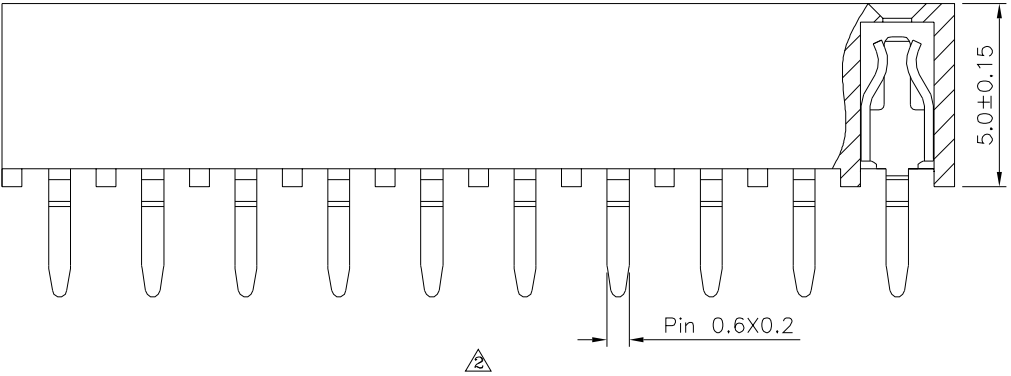

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

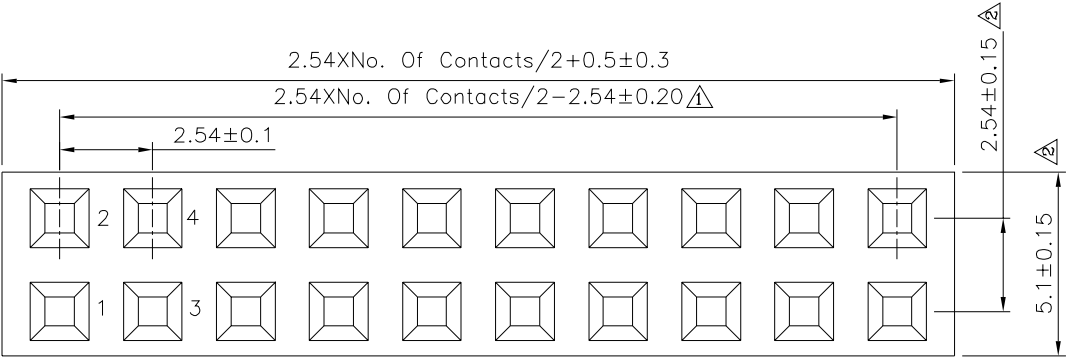

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

00726

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.25 X.* ±2°
.X ±0.20 .X* ±1.5°
.XX ±0.15 .XX* ±1°
.XXX ±0.10 .XXX* ±0.5°

UNIT
mm



	A2	Modify Data	HZF	08/13/2019
	A1	Modify Data	HZF	04/21/2015
	A0	NEW RELEASE	HZF	07/03/2013
NO.REV.	REVISIONS		CHK	DATE