

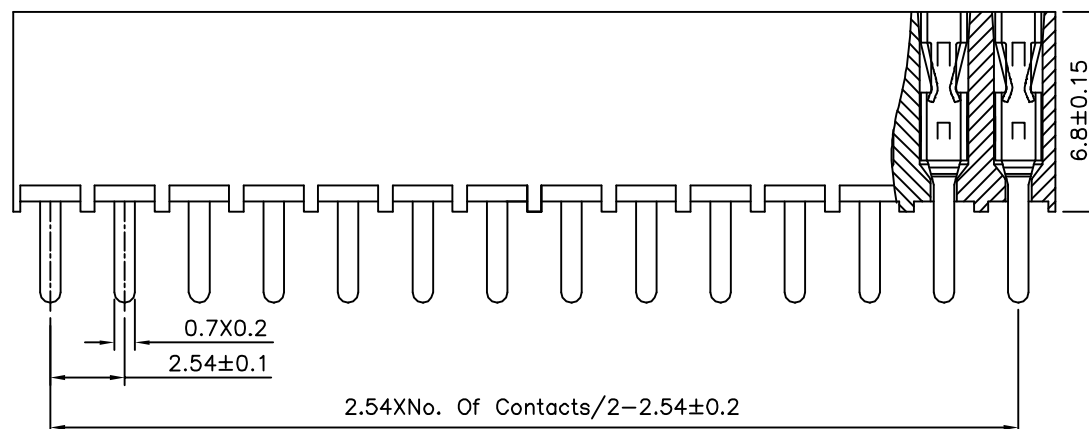


Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance $\pm 0.05$ )

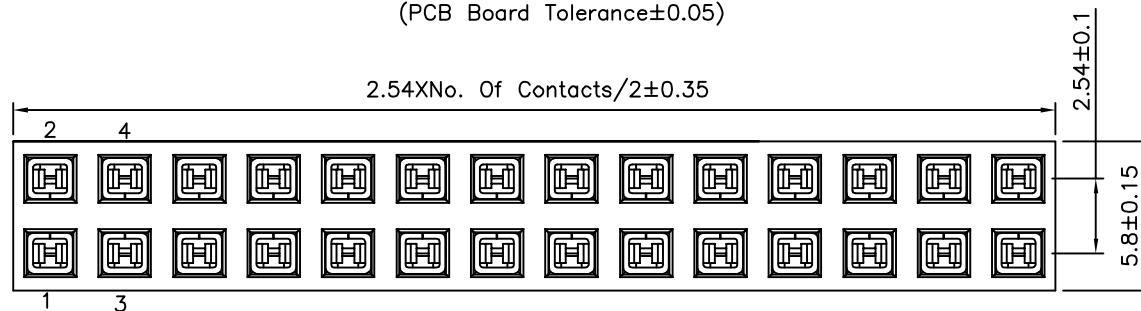

## SPECIFICATION

Current Rating:3 Amps  
Withstand Voltage:1000V AC  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operation Temperature:-40°C~+105°C  
Contact:Phosphor Bronze,Gold Flash Over Nickel  
Insulator:PA6T(UL94V-0),Black  
RoHS Compliant

**4U CON** 元化興業股份有限公司  
4U CON TECHNOLOGY INC.

|             |
|-------------|
| DRAWING No. |
|-------------|

00757

|       |      |
|-------|------|
| SCALE | NONE |
|-------|------|

|             |
|-------------|
| APPROVED BY |
|-------------|

**MEI**

**CHECKED BY**

HZF

DRAWING BY

HAC

UNLESS OTHERWISE SPECIFIED

| TOLERANCES ARE  |                       |
|-----------------|-----------------------|
| X. $\pm 0.25$   | X.* $\pm 2^\circ$     |
| .X $\pm 0.20$   | .X* $\pm 1.5^\circ$   |
| .XX $\pm 0.15$  | .XX* $\pm 1^\circ$    |
| .XXX $\pm 0.10$ | .XXX* $\pm 0.5^\circ$ |

|      |    |
|------|----|
| UNIT | mm |
|------|----|



|    |                                                                                       |      |
|----|---------------------------------------------------------------------------------------|------|
| 5° |  | AO   |
|    | NO.                                                                                   | REV. |

NEW RELEASE

## REVISIONS

---

HZF

|  |            |
|--|------------|
|  | 09/04/2015 |
|--|------------|

CHK

|  |      |
|--|------|
|  | DATE |
|--|------|