File No.	529HH04806	SHEET	1/1



Recommended P.C.B. Layout

SPECIFICATION

Current Rating:3.0 Amps/Contact Max.
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:−55°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V−0),Black
RoHS Compliant

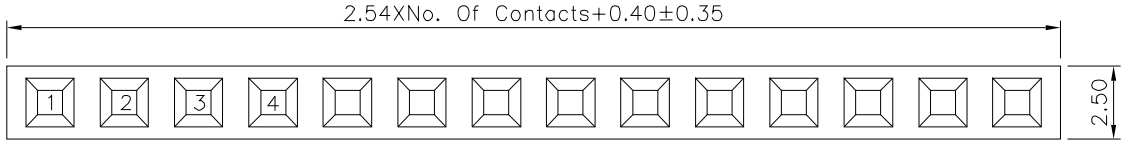

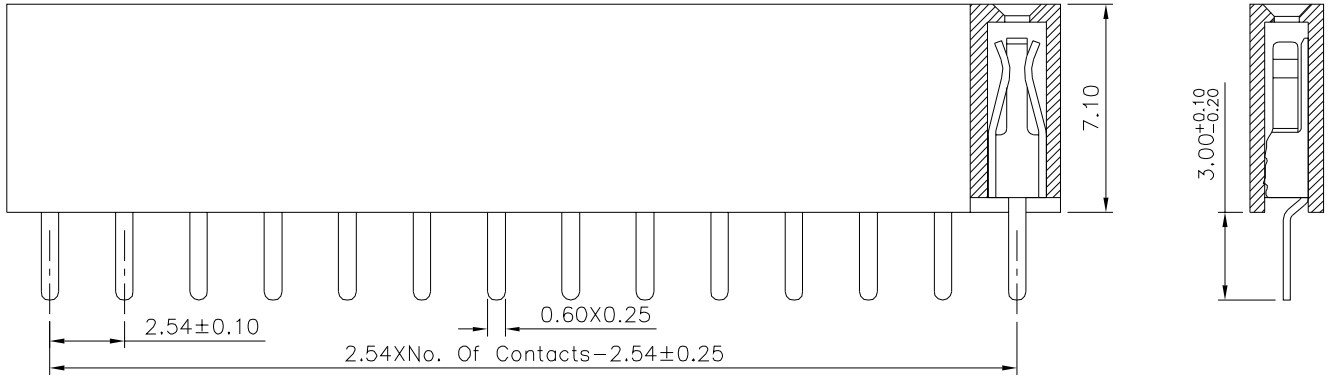

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.20 .XX ±0.15 .XXX ±0.10 ANG. ±5°
00760	CHECKED BY HZF	
	DRAWING BY CYP	
SCALE NONE	REV. A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	HZF	02/04/2017