

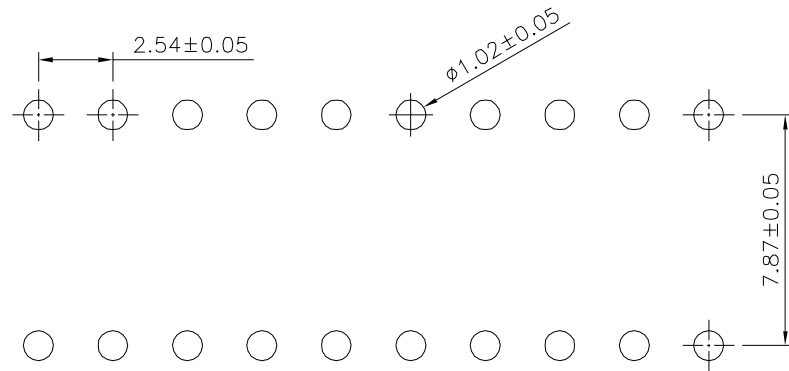
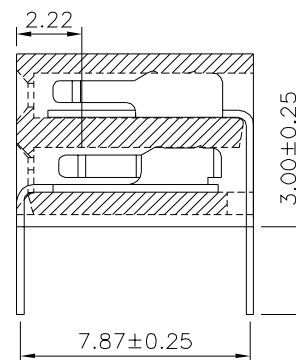


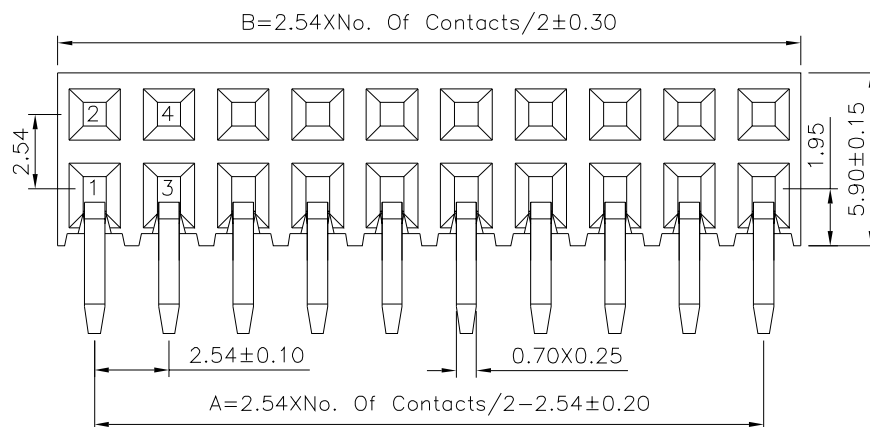

Recommended P.C.B. Layout

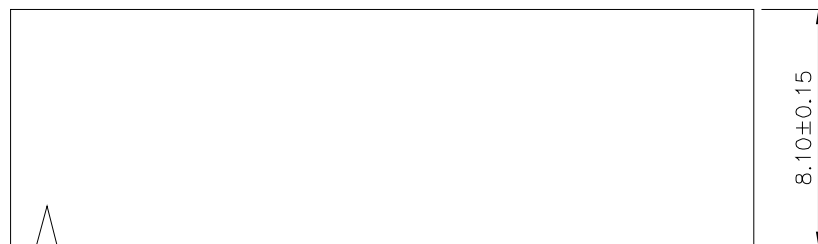

SPECIFICATION

Current Rating:3 Amp
 Withstand Voltage:500V AC/Mimute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:−40°C~+105°C
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 Insulator:PA6T+30%G.F.(UL94V−0),Black
 RoHS Compliant

Pin	A	B
02	2.54	5.08

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00772

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.30

.XX ±0.20

UNIT
 mm



NO. REV.

AO NEW RELEASE

REVISIONS

CHK

DATE

11/12/2015