



File No.	182PD02237	SHEET	1/1

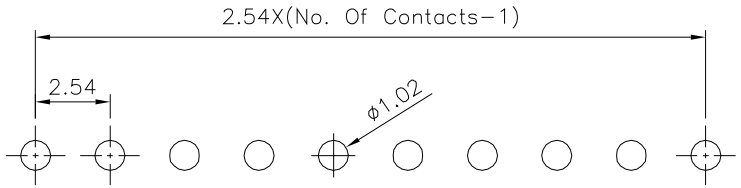

Recommended P.C.B. Layout

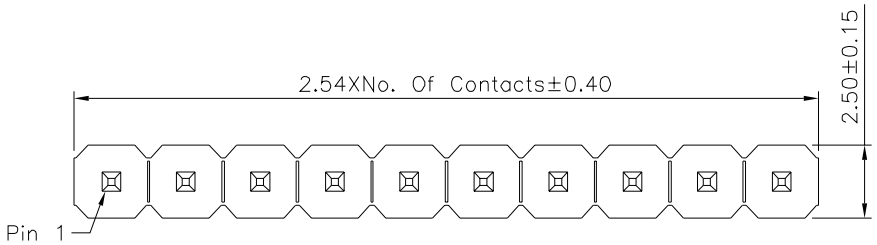

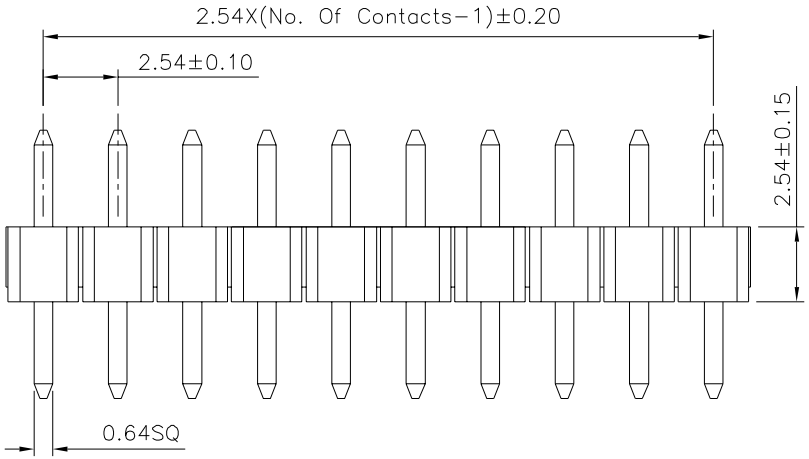

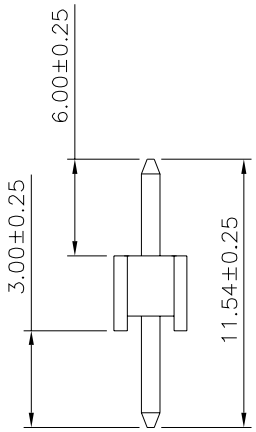

SPECIFICATION

Current:3A
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstanding Voltage:1000V AC/Mimute
Operation Temperature:−40°C~+105°C
Housing:PBT(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:02~40 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
00822	MEI	.X ±0.38
	CHECKED BY HZF	.XX ±0.25
	DRAWING BY CYP	XXX ±0.05
SCALE NONE	REV. B0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	B0	NEW RELEASE	HZF	03/16/2025