


# SPECIFICATION


Current:3A  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Withstanding Voltage:1000V AC/Mimute  
Operation Temperature:-40°C~+105°C  
Housing:PBT(UL94V-0),Black  
Contact:Brass,Gold Flash Over Nickel  
No. Of Contacts:02~40 Contacts  
RoHS Compliant

2.54X(No. Of Contacts-1)


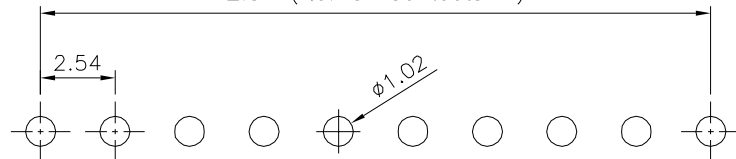


Recommended P.C.B. Layout

2.54XNo. Of Contacts±0.40

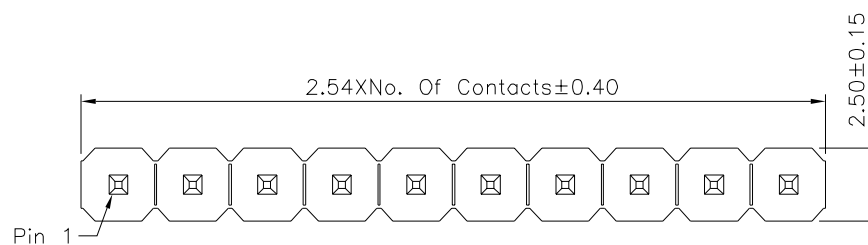

2.54X(No. Of Contacts-1)±0.20

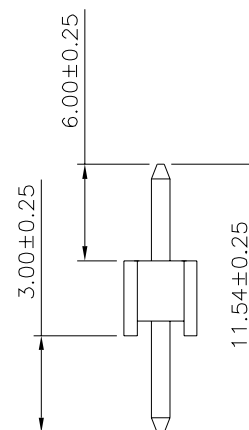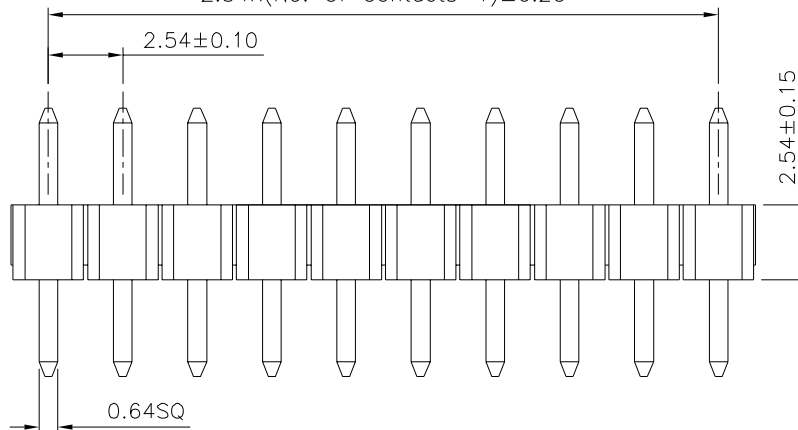

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

00827

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

BO

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X ±0.38  
.XX ±0.25  
XXX ±0.05

UNIT  
mm



NO. REV.

BO NEW RELEASE

REVISIONS

CHK

DATE

BO

NEW RELEASE

REVISIONS

CHK

DATE