

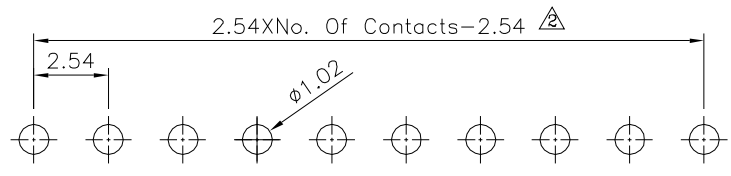
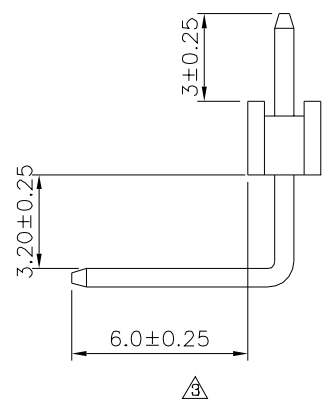


SPECIFICATION
 Current Rating:3 Amp
 Withstanding Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PBT(UL94V-0),Black
 RoHS Compliant

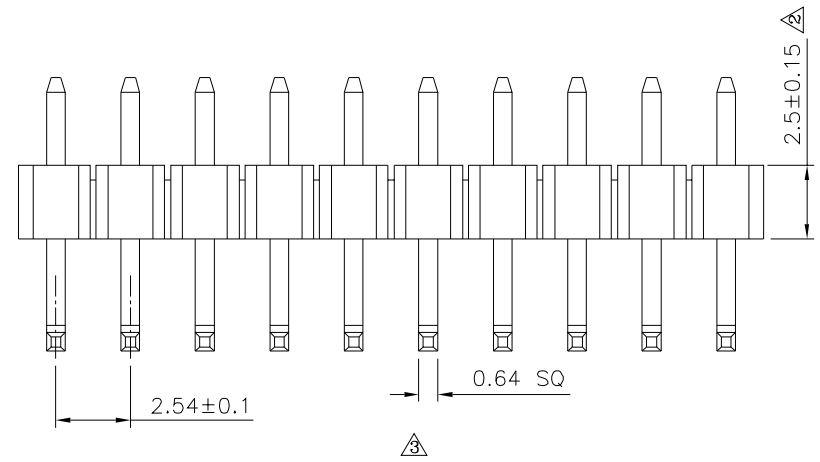

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

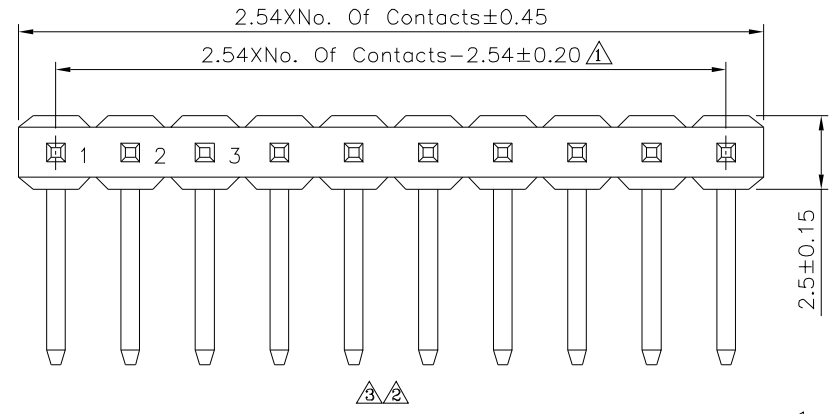

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2* .XX ±0.20 .X.* ±1.5* .XX ±0.15 .XX* ±1* .XXX ±0.10 .XXX* ±0.5*
00848		MEI		
		CHECKED BY	HZF	
SCALE		REV.	A3	
NONE				UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	02/09/2017
2	A2	Modify Data	HZF	02/21/2014
1	A1	Modify Data	HZF	02/22/2011
0	A0	NEW RELEASE	HZF	12/09/2009