
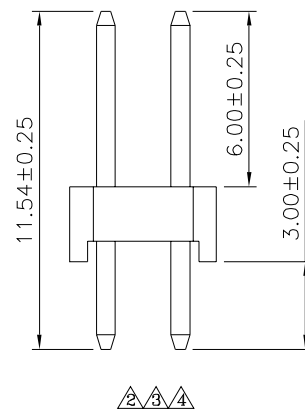
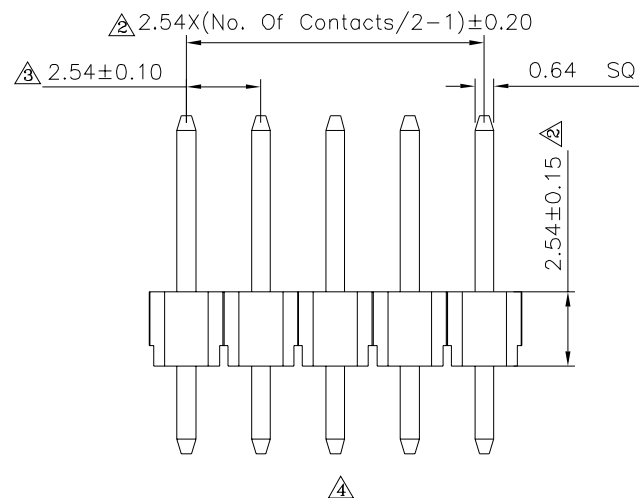


Recommended P.C.B. Layout

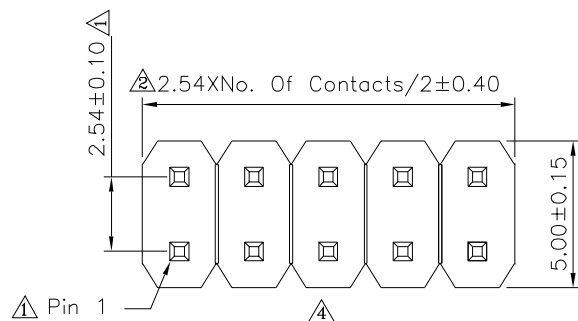

△△ SPECIFICATION

Current:3A

⚠ Withstanding Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PBT(UL94V-O),Black
 ⚠ Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~80 Pin
 RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No. 

01029

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

$\triangle 4$	.X	± 0.38
	.XX	± 0.25
	.XXX	± 0.05

	UNIT
	mm



	$\triangle_4$	A4
--	---------------	----

4	Modify Data
---	-------------

HZF

08/22/2019

	Modify Data
3	Modify Data

475

03/31/2014

3	A3
4	4

5	Modify	Data
6	11	112

HZF
1.000

03/31/2014	
03/31/2014	

	A2
---	----

2	Modify Data
---	-------------

HZF

08/19/2010	
------------	--

	A1
---	----

1	Modify Data
---	-------------

HZF

04/22/2009

	
	AO

NEW RELEASES

CLIN

03 / 06 / 2006