




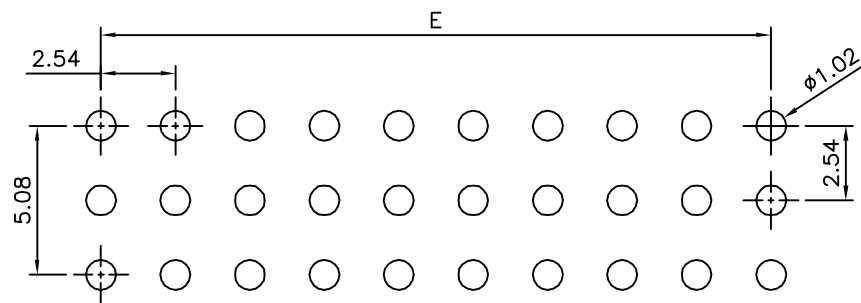


△ Recommended P.C.B. Layout

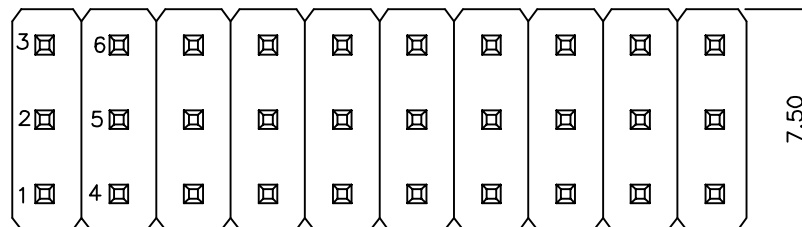

△

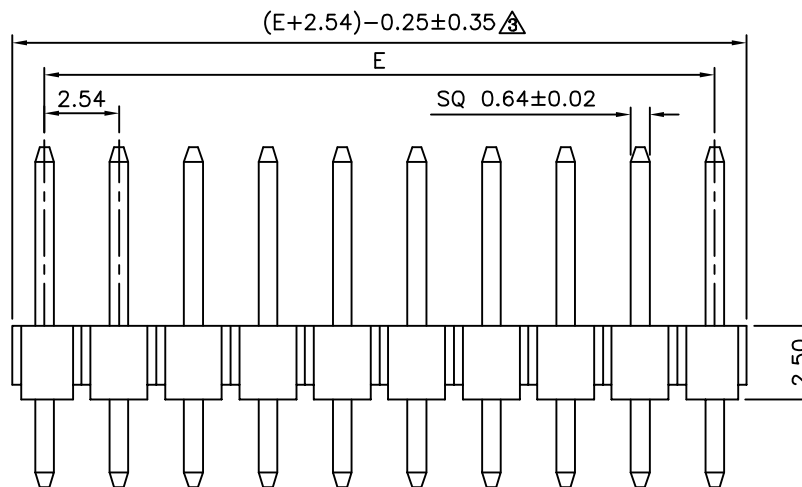

△

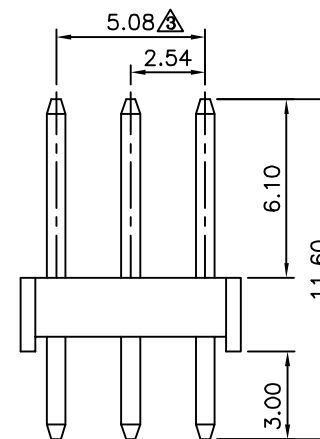

△

△ SPECIFICATION

Current Rating:3 Amp
Withstanding Voltage:500V AC For One Minute
Contact Resistance:20 Milliohms Max.
At DC 100mA
Insulation Resistance:5000 Megaohms Min.
At DC 500V
Operation Temperature:−40°C~+105°C
Insulator:PBT+30%G.F.(UL94V−0),Black
△ Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

Pin	E	Pin	E
6	2.54	63	50.80
9	5.08	66	53.34
12	7.62	69	55.88
15	10.16	72	58.42
18	12.70	75	60.96
21	15.24	78	63.50
24	17.78	81	66.04
27	20.32	84	68.58
30	22.86	87	71.12
33	25.40	90	73.66
36	27.94	93	76.20
39	30.48	96	78.74
42	33.02	99	81.28
45	35.56	102	83.82
48	38.10	105	86.36
51	40.64	108	88.90
54	43.18	111	91.44
57	45.72	114	93.98
60	48.26	117	96.52
		120	99.06

DRAWING No.

01063

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ± 0.30
 .XX ± 0.20
 ANG. $\pm 3^\circ$

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
△ A3		Modify Data	HZF	01/17/2014
△ A2		Modify Data	HZF	05/24/2012
△ A1		Modify Data	HZF	05/05/2010
△ A0		NEW RELEASE		

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.