
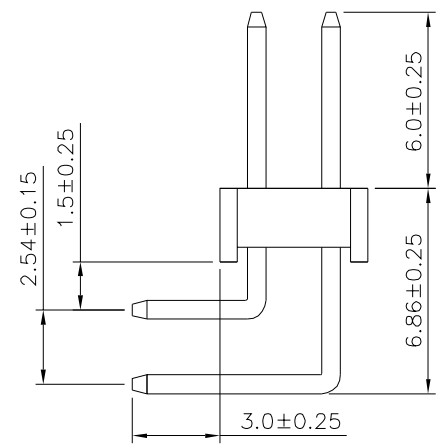
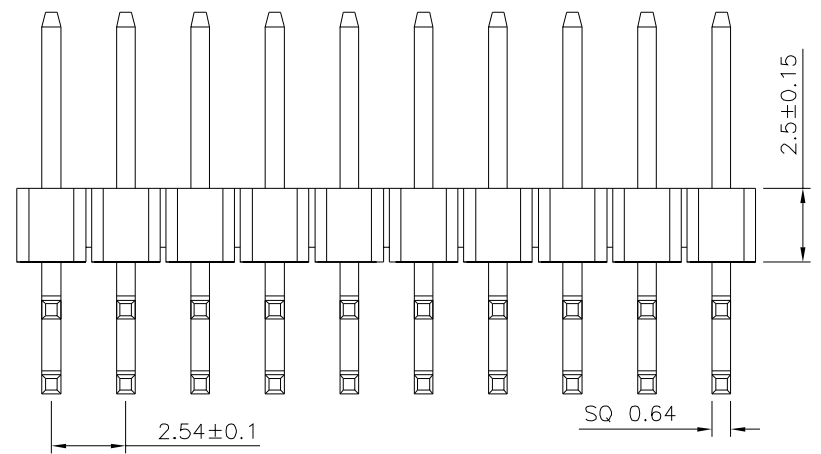


Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ±0.05)

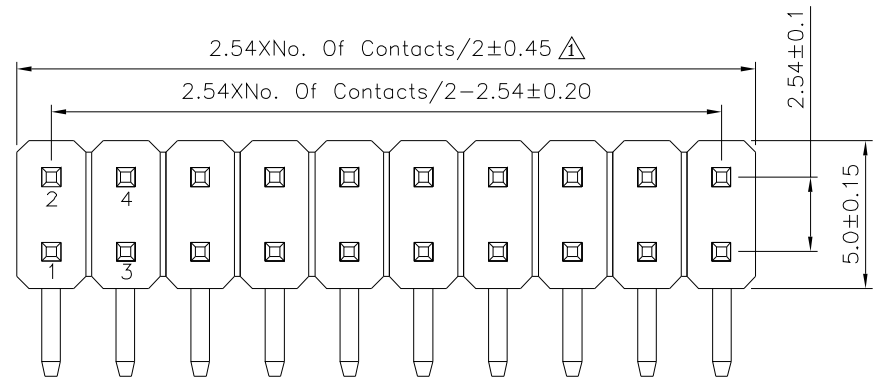

SPECIFICATION
 Current Rating: 3 Amp
 Withstanding Voltage: 1000V AC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Contact: Brass, Gold Flash Over Nickel
 Insulator: PA9T (UL94V-0), Black
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
01069		MEI	X. ±0.25 X.* ±2* .X ±0.20 .X.* ±1.5* .XX ±0.15 .XX.* ±1* .XXX ±0.10 .XXX.* ±0.5*	
		HZF		
SCALE	NONE	REV.	A2	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	08/28/2023
△1	A1	Modify Data	HZF	01/09/2017
△0	A0	NEW RELEASE	HZF	01/10/2015