
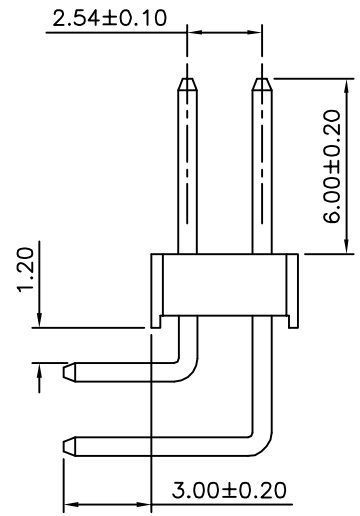
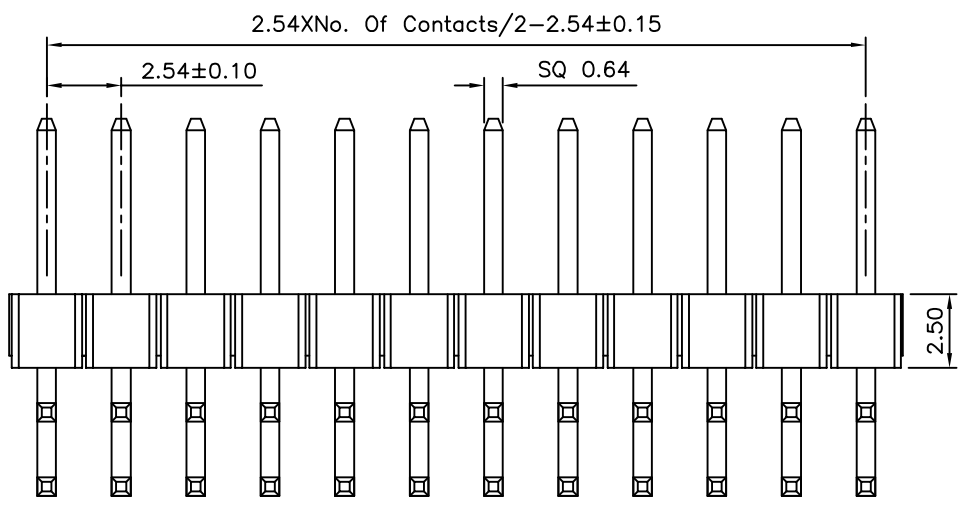


Recommended P.C.B. Layout

SPECIFICATION

Current Rating: 3.0 Amps/Contact Max.
 Withstand Voltage: 1000V AC For 1 Minute
 Contact Resistance: 20 Milliohms/Contact Max.
 Insulation Resistance: 1000 Megaohms Min. At 100V
 Operation Temperature: -55°C ~ +105°C
 Insulator: PA6T+30%G.F.(UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

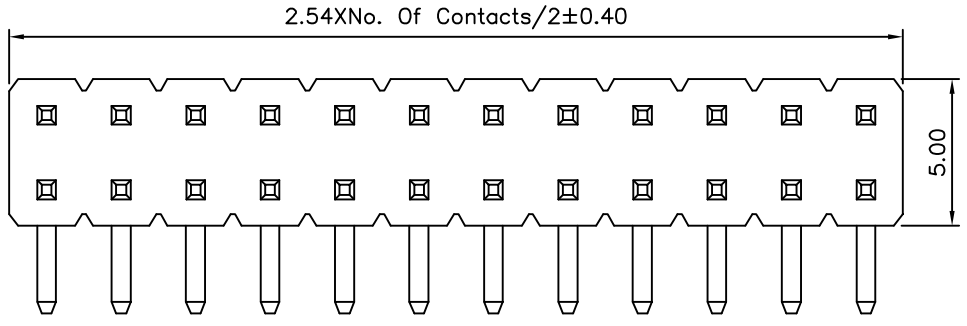

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 X ±0.30 XX ±0.20 .XXX ±0.10 ANG. ±5°
01076		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	A0	

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	07/16/2012