
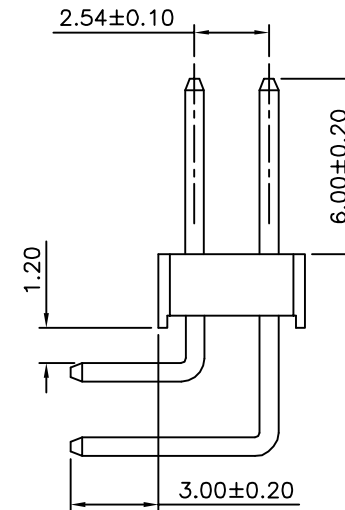
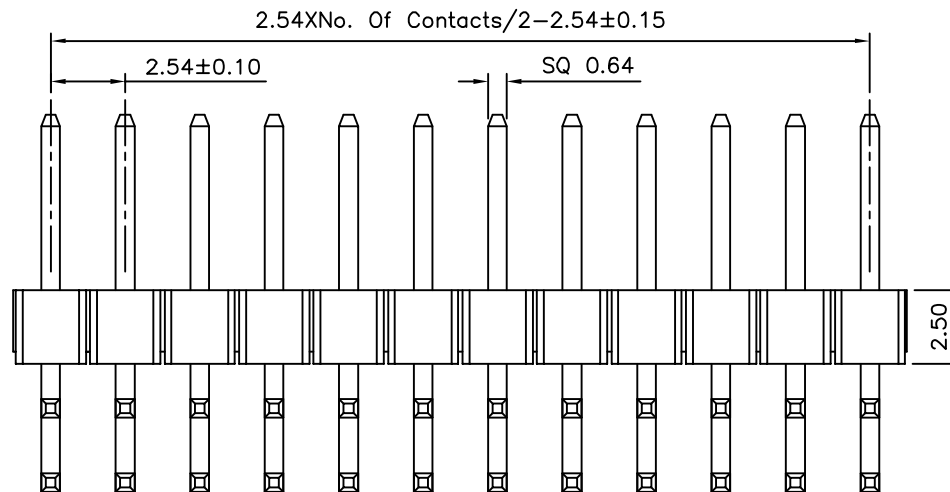


Recommended P.C.B. Layout

SPECIFICATION

Current Rating:3.0 Amps/Contact Max.
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:20 Milliohms/Contact Max.
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operation Temperature:-55°C~+105°C
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

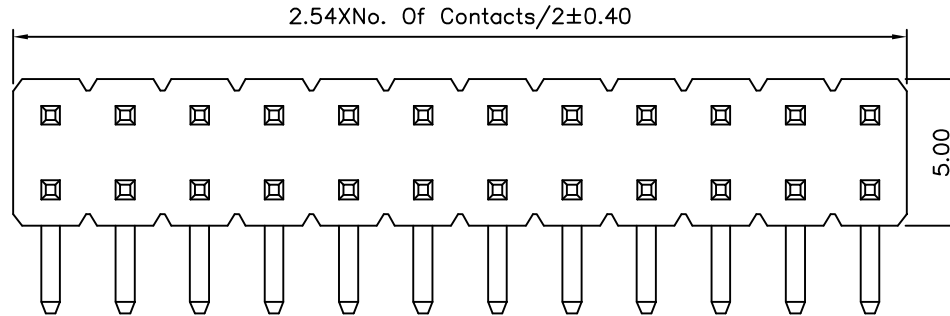

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

01087

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG


REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.50
 X. ±0.30
 XX ±0.20
 XXX ±0.10
 ANG. ±5°

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

07/16/2012