File No.	697NH28806	SHEET	1/1

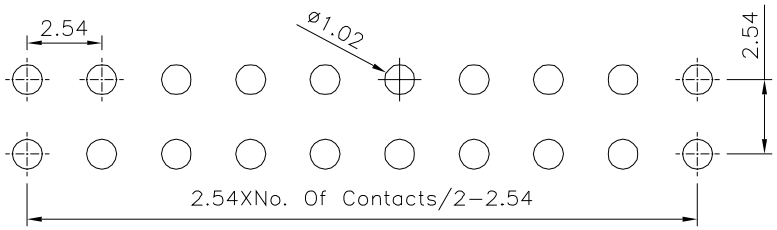

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

SPECIFICATION
Current Rating:3 Amp
Withstanding Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
△2 Insulator:PA9T(UL94V−0),Black
RoHS Compliant

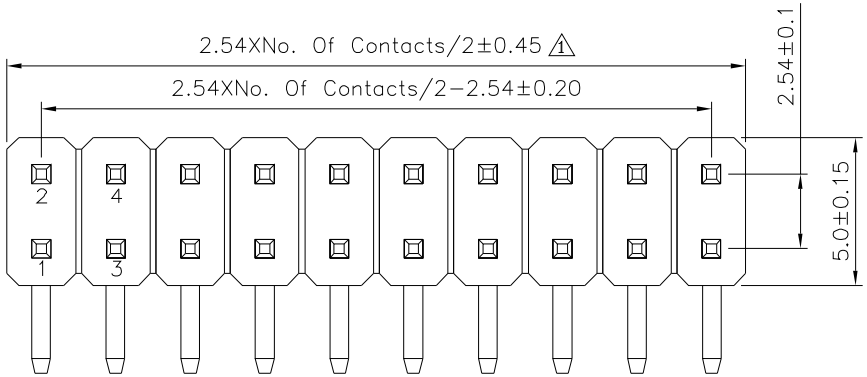

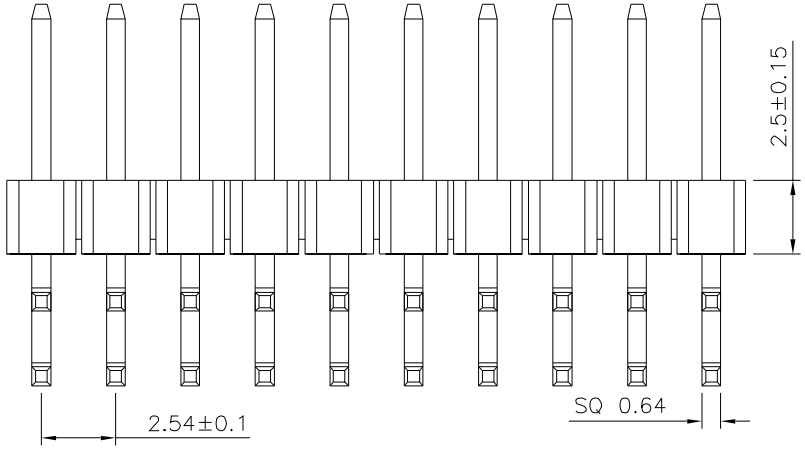

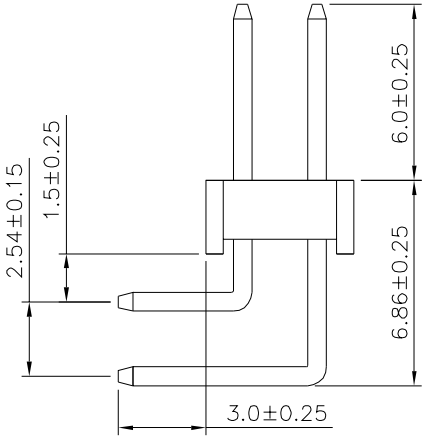

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
01103	CHECKED BY HZF	X. ±0.25 X.° ±2° .X ±0.20 .X° ±1.5° .XX ±0.15 .XX° ±1° .XXX ±0.10 .XXX° ±0.5°
	DRAWING BY HAO	
SCALE NONE	REV. A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	08/28/2023
△1	A1	Modify Data	HZF	01/09/2017
△0	A0	NEW RELEASE	HZF	01/10/2015