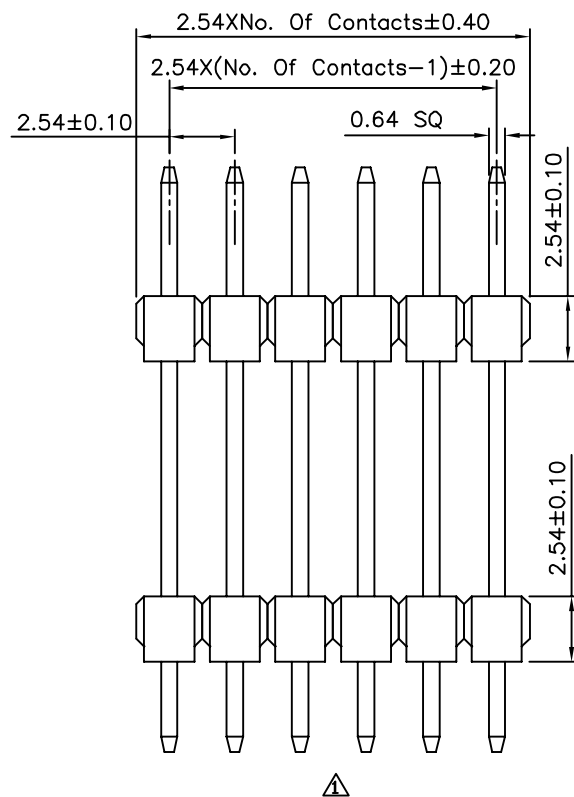
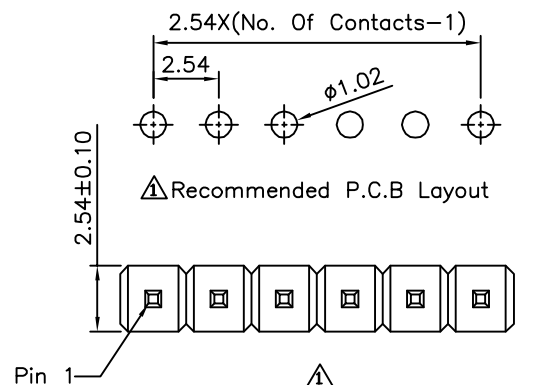


△ SPECIFICATION

Current:3A
Withstanding Voltage:1000V AC RMS
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-55°C~+105°C
Insulator:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:2~40 Contacts
RoHS Compliant

DRAWING No.

01141

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

△ .X ±0.38

.XX ±0.25

ANG. ±5°

UNIT mm



NO.

REV.

A1

Modify Data

HZF

08/01/2012

NO.

REV.

A0

NEW RELEASE

BECKY

2004/06/17

REVISIONS

CHK

DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.