

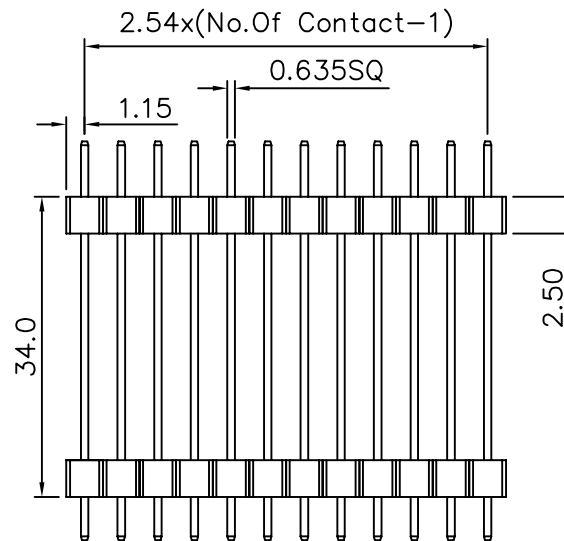


SPECIFICATIONS

Current Rating : 1AMP
Insulation Resistance : 5000 Megohms Min. At DC 500V
Contact Resistance : 20 Milliohms Max.At DC 100mA
Operating Temperature : -55°C To +105°C
Contact : Brass,Gold Flash
Insulator : 30% Glass Filled PBT,UL 94V-0

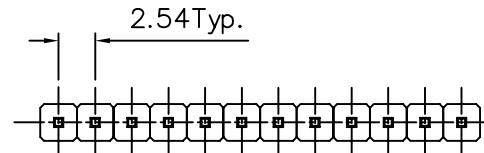

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

01143

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE
SPECIFIED

TOLERANCES ARE
.X ±0.38

.XX ±0.25
ANG.


SCALE

NONE

REV.

A

UNIT
mm



AREA

REVISIONS

CHK

DATE