
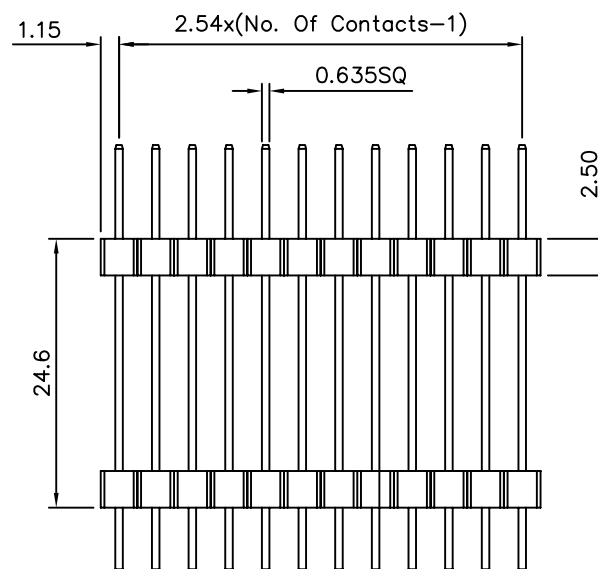



SPECIFICATIONS

Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms Min. At DC 500V
 Contact Resistance: 20 Milliohms Max. At DC 100mA
 Operating Temperature: -55°C To +105°C
 Contact: Brass, Gold Flash
 Insulator: 30% Glass Filled PBT, UL 94V-0

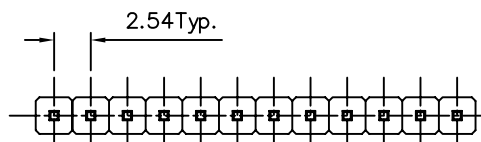

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

01144

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG.

SCALE

NONE

REV.

A1

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	BECKY	01/11/2006
△	A0	NEW RELEASE	BECKY	06/17/2004