

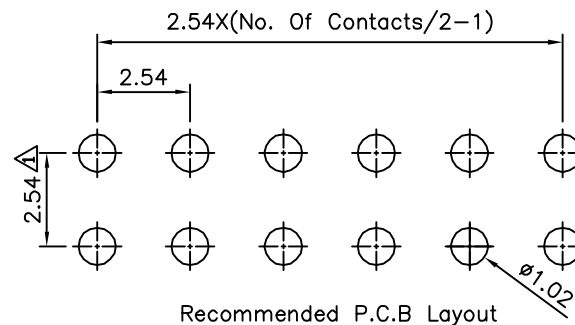
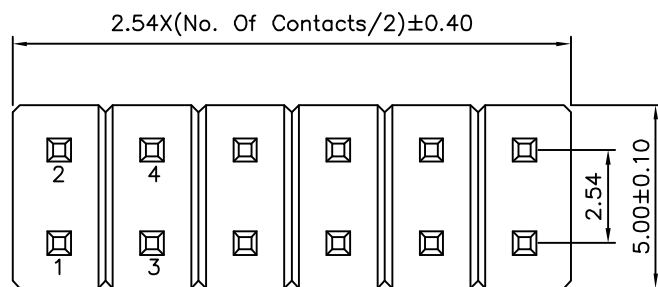


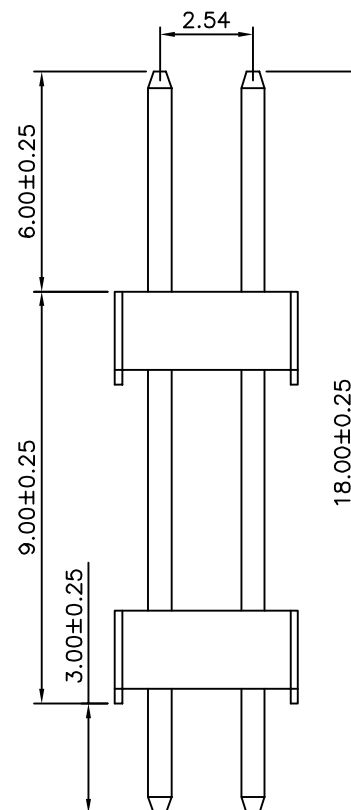

△ SPECIFICATION

Current:3A
Withstand Voltage:1000V AC RMS
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-55°C~+105°C
Housing:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:4~80 Contacts
RoHS Compliant

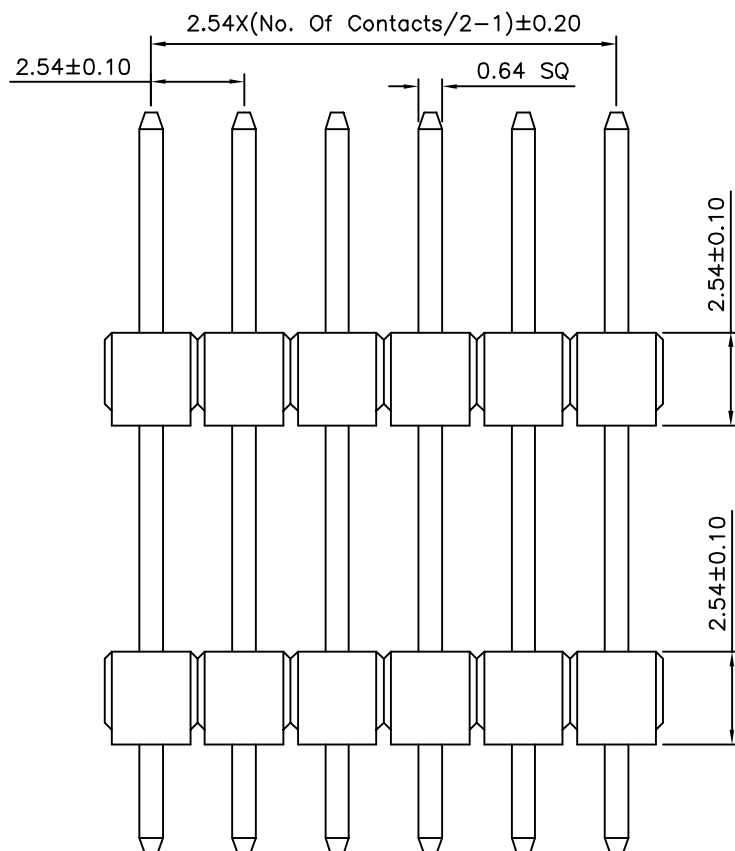

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

01154

SCALE	NONE
-------	------

APPROVED BY

EMILY

CHECKED BY


HZF

DRAWING BY

SAN

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X	± 0.38
.XX	± 0.25
ANG.	$\pm 5^\circ$

UNIT
mm

	A1	Modify Data	HZF	05/24/2014
	A0	NEW RELEASE	HZF	10/02/2006
NO REV.		REVISIONS	CHK	DATE