

SPECIFICATION

Current Rating:1A AC/DC

Voltage Rating:125V AC Max.

Dielectric Withstanding Voltage:250V AC/Minute




Insulation Resistance:100 Megaohms Min.

Contact Resistance:20 Milliohms Max.

Operation Temp:-20°C~+85°C

Material:PA66(UL94V-0)

RoHS Compliant

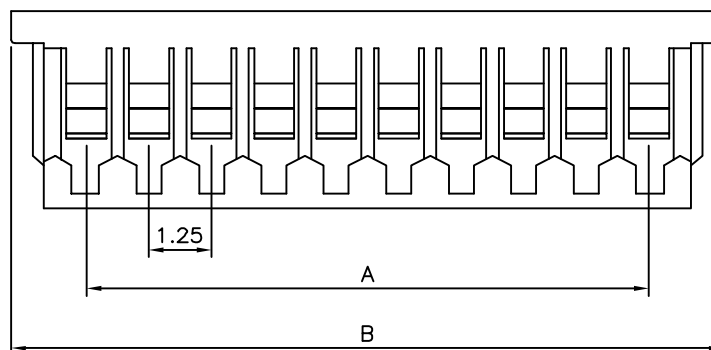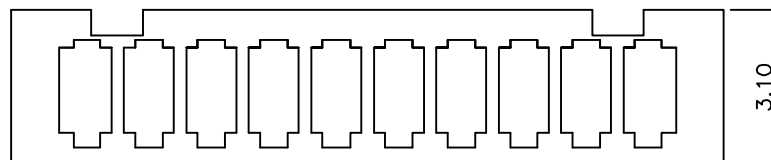

Contacts	A	B
2	1.25	4.25
3	2.50	5.50
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

01194

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.25

.XX ± 0.15


SCALE

NONE

REV.

B1

UNIT
mm



△ B1

Modify Data

HZF

07/08/2015

△ B0

NEW RELEASE

HZF

12/10/2009

NO. REV.

REVISIONS

CHK

DATE