

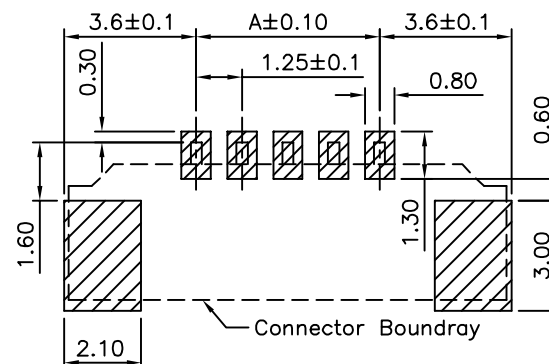
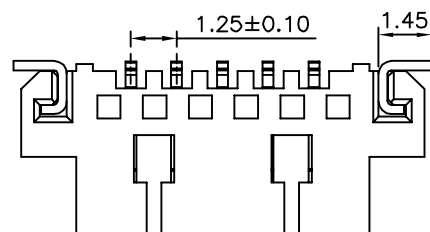
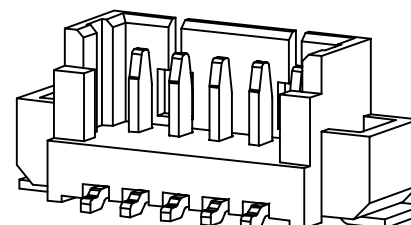

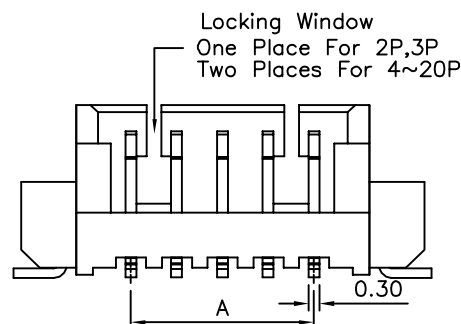


SPECIFICATION

Current Rating:1 Amp Max.
 Operation Voltage:150V AC Max.
 Withstand Voltage:500V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:500 Megaohms Min.
 Operation Temperature:-40°C~+85°C
 Insulator:PA9T(UL94V-0),Nature
 Contact:Brass,Matte Tin Plated Over Nickel
 Locating:Brass,Matte Tin Plated Over Nickel
 RoHS Compliant



Recommended P.C.B. Layout

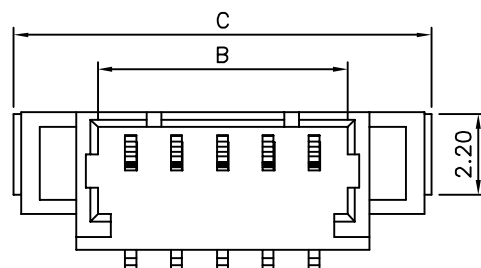

Pin	A	B	C
2	1.25	3.05	7.65
3	2.50	4.30	8.90
4	3.75	5.55	10.15
5	5.00	6.80	11.40
6	6.25	8.05	12.65
7	7.50	9.30	13.90
8	8.75	10.55	15.15
9	10.00	11.80	16.40
10	11.25	13.05	17.65
11	12.50	14.30	18.90
12	13.75	15.55	20.15
13	15.00	16.80	21.40
14	16.25	18.05	22.65
15	17.50	19.30	23.90
16	18.75	20.55	25.15
17	20.00	21.80	26.40
18	21.25	23.05	27.65
19	22.50	24.30	28.90
20	23.75	25.55	30.15

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

01226

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 ANG.

UNIT
 mm



NO. REV.

NEW RELEASE


REVISIONS

CHK


05/07/2012

DATE

SPECIFICATION
Q'ty:1000 PCS/Reel
RoHS Compliant

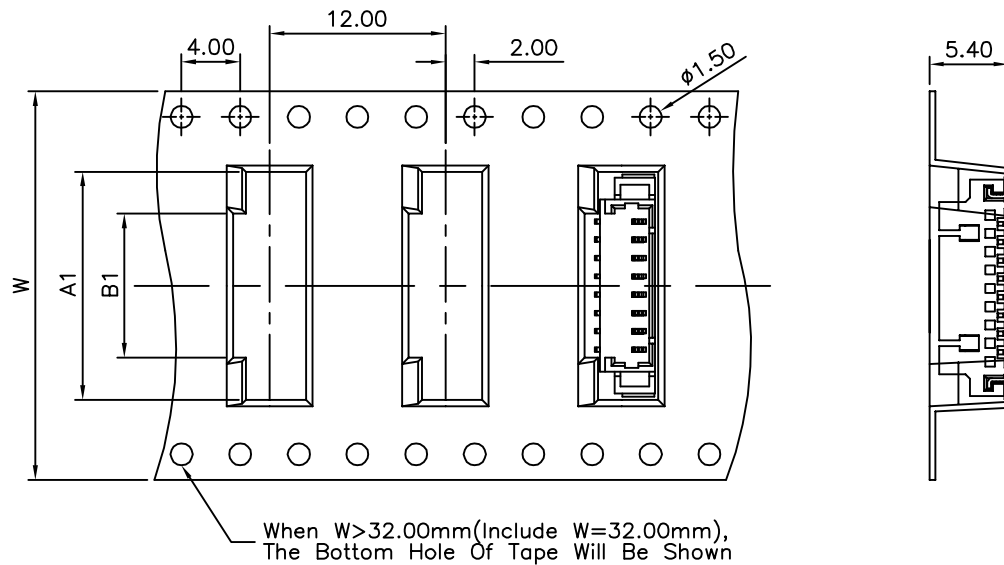

Pin	A1	B1	W
2	8.45	3.55	16.0
3	9.70	4.80	
4	10.95	6.05	
5	12.20	7.30	
6	13.45	8.55	24.0
7	14.70	9.80	
8	15.95	9.80	
9	17.20	11.05	
10	18.45	12.30	32.0
11	19.70	13.55	
12	20.95	14.80	
13	22.20	16.05	
14	23.45	17.30	44.0
15	24.70	18.55	
16	25.95	19.80	
17	27.20	21.05	
18	28.45	22.30	
19	29.70	23.55	
20	30.95	24.80	

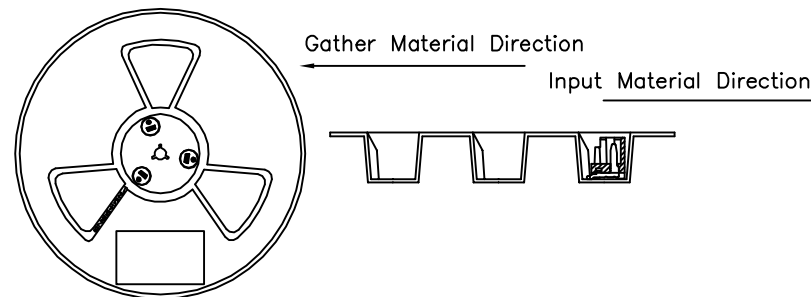

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

01226

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.3
.XX ± 0.2
.XXX ± 0.1

SCALE

NONE

REV.

A0

UNIT
mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE

A0

NEW RELEASE

REVISIONS

CHK

DATE

NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE

A0

NEW RELEASE

REVISIONS

CHK

DATE