


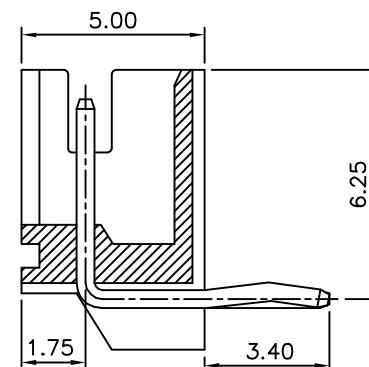


△△ SPECIFICATION
 Current Rating:2A
 Voltage Rating:100V AC
 Contact Resistance:20 Milliohms Max.
 Dielectric Withstanding Voltage:800V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Insulator:PA66(UL94V-0),White
 Contact:Brass,Tin Plated
 RoHS Compliant

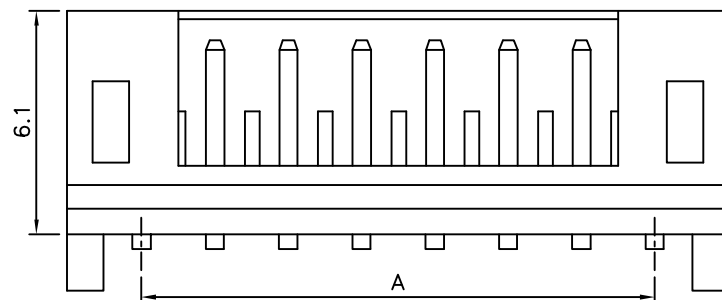

Recommended P.C.B. Layout

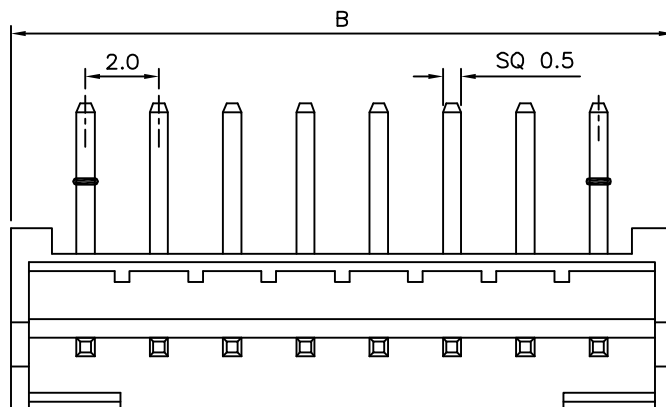

Pin	A	B
2	2.0	6.04
3	4.0	8.04
4	6.0	10.04
5	8.0	12.04
6	10.0	14.06
7	12.0	16.06
8	14.0	18.08
9	16.0	20.08
10	18.0	22.10
11	20.0	24.10
12	22.0	26.12
13	24.0	28.12
14	26.0	30.14
15	28.0	32.14
16	30.0	34.14

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

01549

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.3
 .XX ±0.2

UNIT
 mm



△ A3

Modify Data

HZF

01/06/2016

△ A2

Modify Data

HZF

03/23/2010

△ A1

Modify Data

BECKY

2005/02/17

△ A

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE