
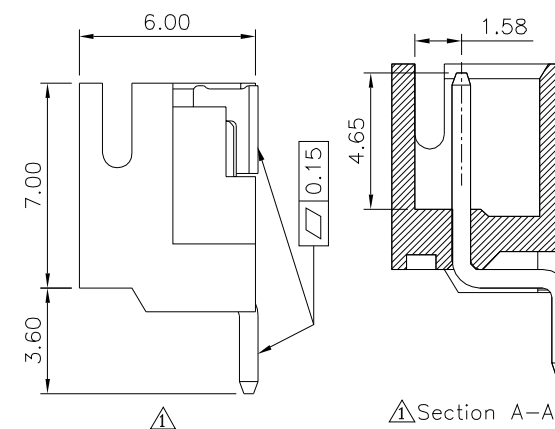
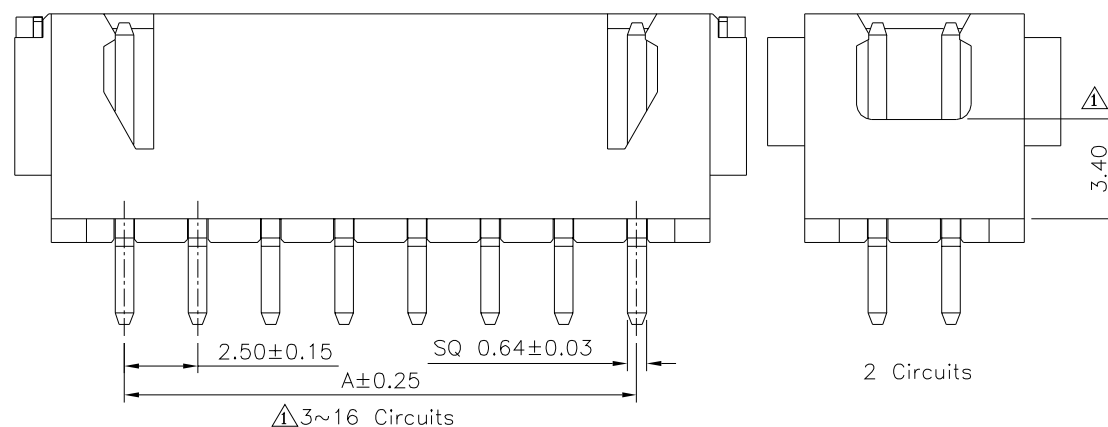


SPECIFICATION

Current Rating:3A AC/DC
Voltage Rating:250V AC/DC
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-25°C~+85°C
Housing:PA9T(UL94V-0),Beige
Contact:Brass,Tin Plated Over Nickel
Solder Nail:Brass,Tin Plated Over Nickel
RoHS Compliant

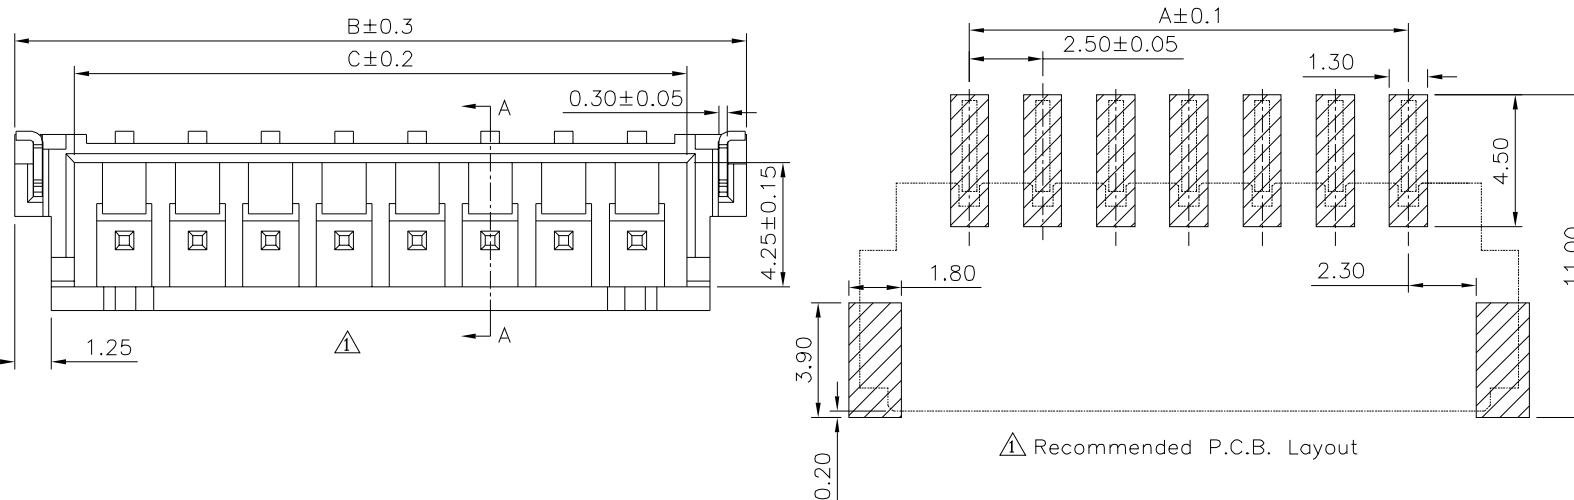

Pin	A	B	C
02	2.50	10.00	5.90
03	5.00	12.50	8.40
04	7.50	15.00	10.90
05	10.00	17.50	13.40
06	12.50	20.00	15.90
07	15.00	22.50	18.40
08	17.50	25.00	20.90
09	20.00	27.50	23.40
10	22.50	30.00	25.90
11	25.00	32.50	28.40
12	27.50	35.00	30.90
13	30.00	37.50	33.40
14	32.50	40.00	35.90
15	35.00	42.50	38.40
16	37.50	45.00	40.90

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 01581

01581

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±2°

UNIT
mm

NO.	REV.	REVISIONS	CHK	DATE
②	A2	Modify Data	HZF	09/14/2022
①	A1	Modify Data	HZF	08/10/2021
①	A0	NEW RELEASE	HZF	10/01/2015