


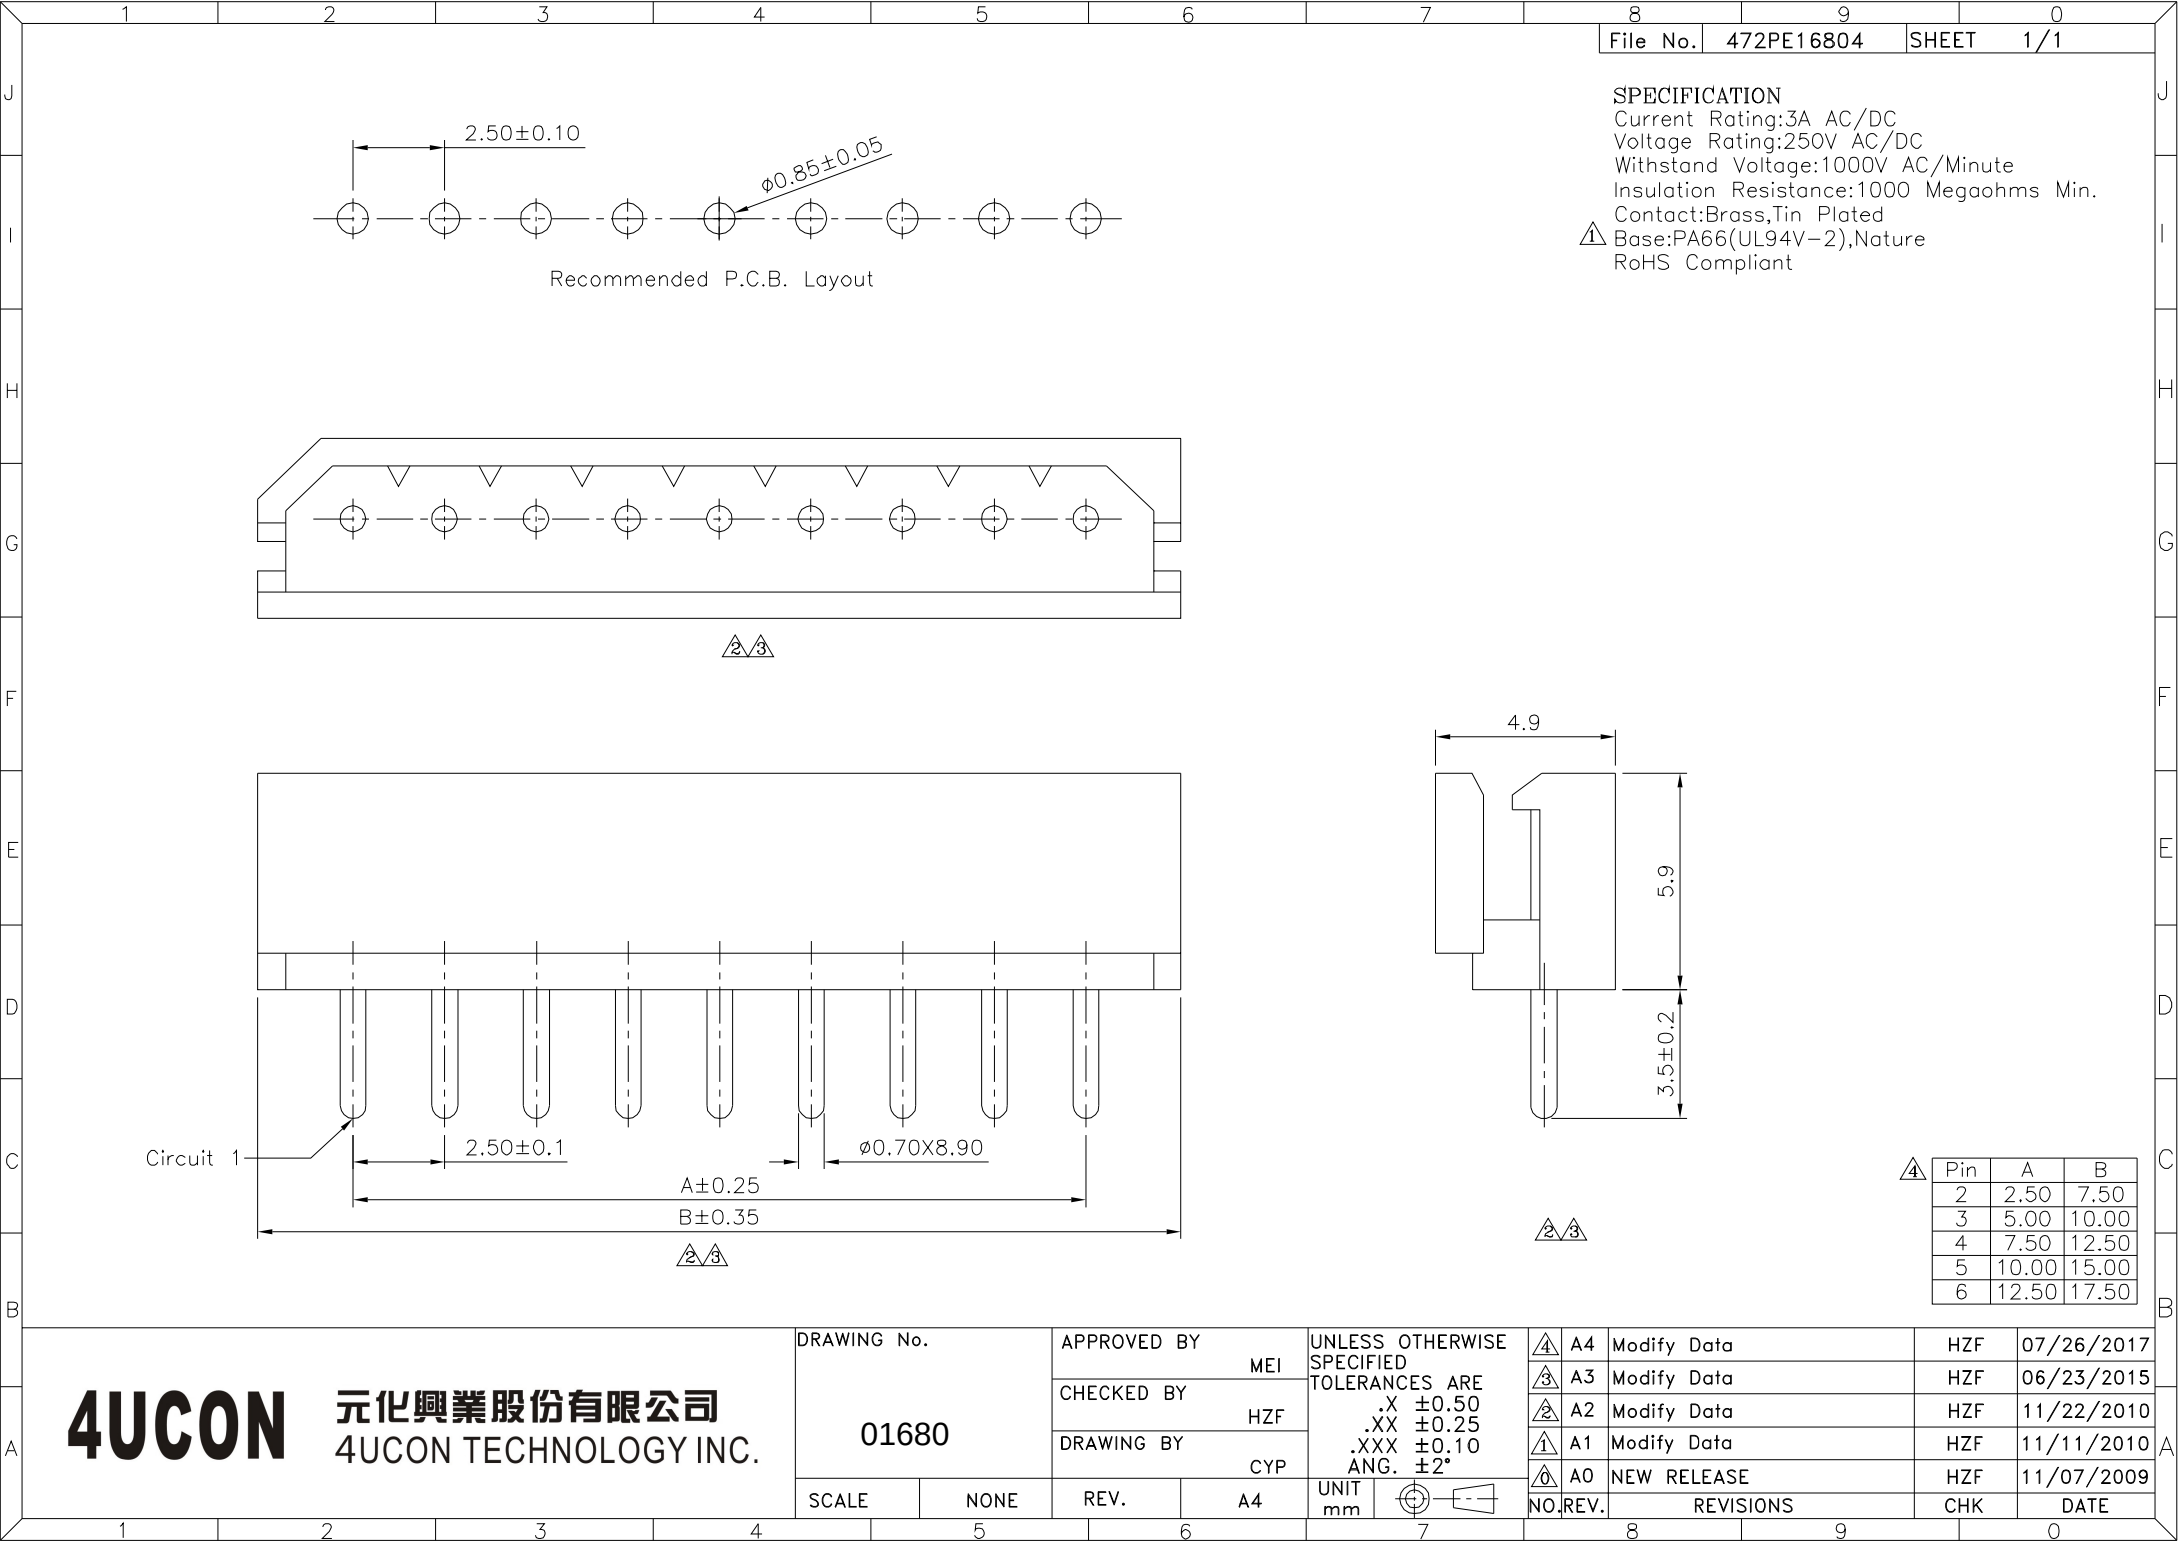

SPECIFICATION
Current Rating:3A AC/DC
Voltage Rating:250V AC/DC
Withstand Voltage:1000V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Contact:Brass,Tin Plated
Base:PA66(UL94V-2),Nature
RoHS Compliant

Pin	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	HZF
01680		DRAWING BY	CYP
		SCALE	NONE
		REV.	A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.50 .XX ±0.25 .XXX ±0.10 ANG. ±2°		UNIT	mm

4	A4	Modify Data	HZF	07/26/2017
3	A3	Modify Data	HZF	06/23/2015
2	A2	Modify Data	HZF	11/22/2010
1	A1	Modify Data	HZF	11/11/2010
0	A0	NEW RELEASE	HZF	11/07/2009
NO.	REV.	REVISIONS	CHK	DATE