

# SPECIFICATIONS

Current Rating: 3 Amperes

Voltage Rating: 250V AC, DC

Dielectric Withstanding Voltage:



1500 AC For 60 Seconds

Contact Resistance: 20 Milliohms Max

Insulation Resistance: 1000 Megohms Min

Ambient Temperature Range: -40°C To +105°C

Material: Nylon 66, UL 94V-0

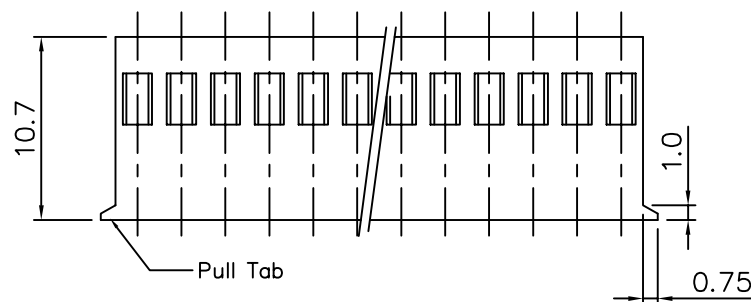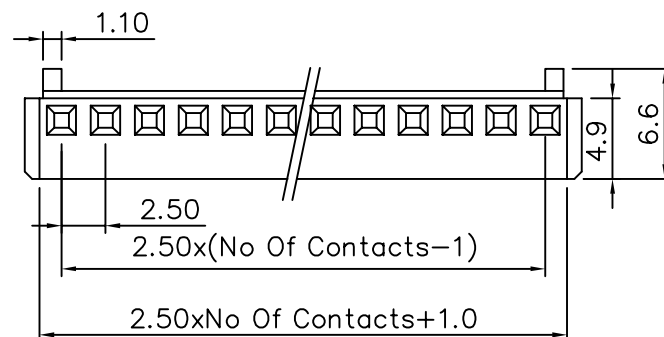

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

01758

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG.

UNIT  
mm



SCALE

NONE

REV.

A

AREA

REVISIONS

CHK

DATE