

SPECIFICATIONS

Current Rating: 3 Amperes

Voltage Rating: 250V AC, DC

Dielectric Withstanding Voltage:



1500 AC For 60 Seconds

Contact Resistance: 20 Milliohms Max

Insulation Resistance: 1000 Megohms Min

Ambient Temperature Range: -40°C To +105°C

Material: Nylon 66, UL 94V-0

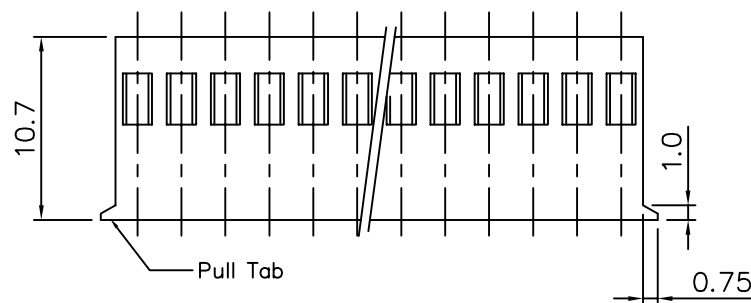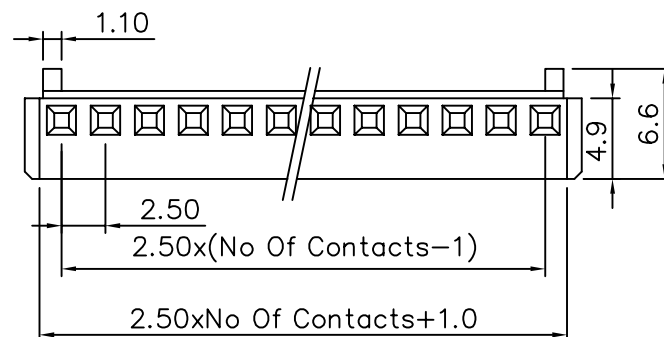

4UCON

元化興業股份有限公司

4UCON TECHNOLOGY INC.

DRAWING No. 01760		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.						
		MEI								
		CHECKED BY								
		RAN								
		DRAWING BY		UNIT mm						
		HZF								
SCALE	NONE	REV.	A			AREA	REVISIONS	CHK	DATE	